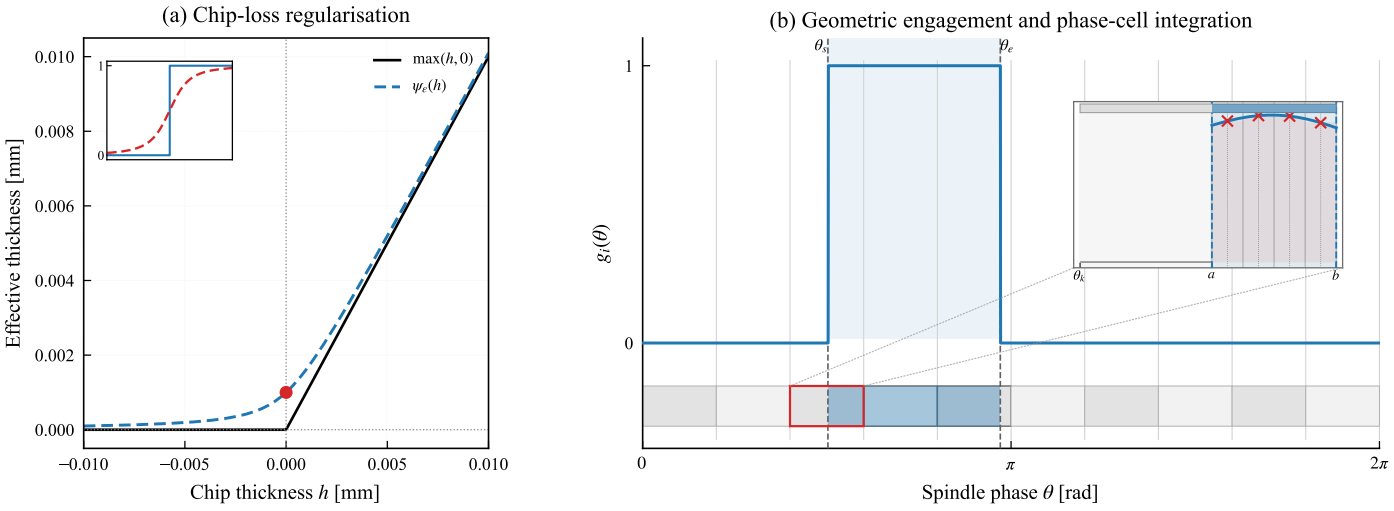
(a) Chip-loss regularisation
Effective thickness [mm]
0.010
0.008
0.006
0.004
0.002
0.000
−0.010
−0.005
0.000
0.005
0.010
Chip thickness h [mm]
max(h, 0)
$\psi_\varepsilon(h)$
1
0
(b) Geometric engagement and phase-cell integration
$g_t(\theta)$
1
0
θ_s
θ_e
θ_k
a
b
0
π
2π
Spindle phase θ [rad]