



SLIDING DOOR SILL ON PAN
FLASHING, SEAL TO CONC. PER
MFR. (IRC R703.4)*
SLAB DEPRESSION 1 1/2" DEEP
X 8" WIDE FOR SLIDING DOOR
SILL, SLOPE TO EXTERIOR.
VERIFY SILL DEPTH W/ DOOR
MFR.

(1) #4 CONT. TOP
(2) #5 CONT. BOTT., 3" CLR.

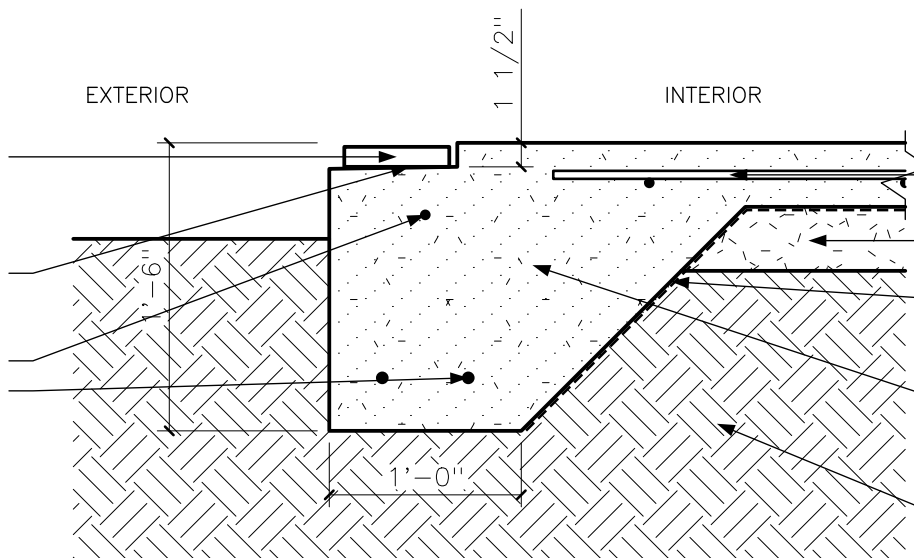

4" CONC. SLAB W/ #4 @ 16"
O.C. EA. WAY (IRC R506.1)*
4" COMPACTED GRAVEL BASE
(IRC R506.2.2)*
10 MIL VAPOR RETARDER, LAP
6" MIN. (IRC R506.2.3)*
MONOLITHIC TURNED-DOWN FTG.
12" W X 18" DEEP BELOW T.O.
SLAB, BOTT. 12" MIN. BELOW
UNDISTURBED GRADE & BELOW
FROST DEPTH (IRC R403.1.4)*
FINISH GRADE, SLOPE AWAY 6"
MIN. IN FIRST 10'-0" (IRC
R401.3)*



SLAB EDGE AT SLIDING DOOR

SCALE: 1" = 1'-0"

DETAIL

PROJECT

SCALE

DRAWN

DATE

DETAIL NO

SLAB EDGE AT SLIDING DOOR

1" = 1'-0"

KERF REFERENCE

2026-10-05

2/S-501