

Отчёт по лабораторной работе 8

Адресация IPv4 и IPv6. Настройка маршрутизации

Талебу Тенке Франк Устон

Содержание

Список иллюстраций

1	Топология сети в GNS3	4
2	Настройка IPv6 на PC1	4
3	Настройка IPv6 на PC2	5
4	Изменение имени и подготовка gw-01	5
5	Настройка интерфейсов gw-01	6
6	Изменение имени gw-02	6
7	Настройка интерфейсов gw-02	7
8	Изменение имени gw-03	7
9	Настройка интерфейсов gw-03	8
10	Проверка IPv6 на PC1	9
11	Проверка IPv6 на PC2	9
12	Проверка связности с gw-01	10
13	Анализ трафика между маршрутизаторами	10
14	Настройка RIP на gw-01	11
15	Настройка RIP на gw-02	11
16	Настройка RIP на gw-03	12
17	Проверка связности после настройки RIP	13
18	Анализ трафика ICMP и RIP	14
19	Настройка туннеля на gw-01	14
20	Настройка туннеля на gw-02	15
21	Статический IPv6-маршрут на gw-01	15
22	Статический IPv6-маршрут на gw-02	16
23	Проверка связности с PC1	16
24	Проверка связности с PC2	17
25	Общий вид трафика IPv6	17

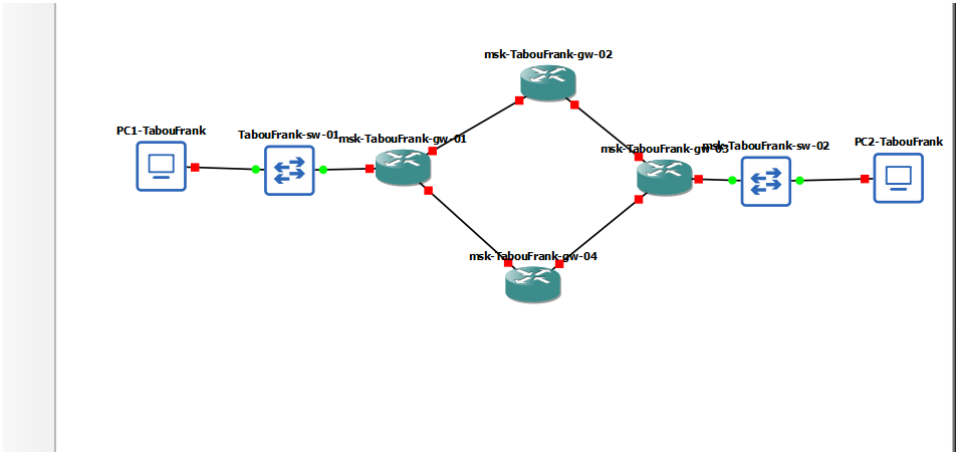


Рис. 1: Топология сети в GNS3

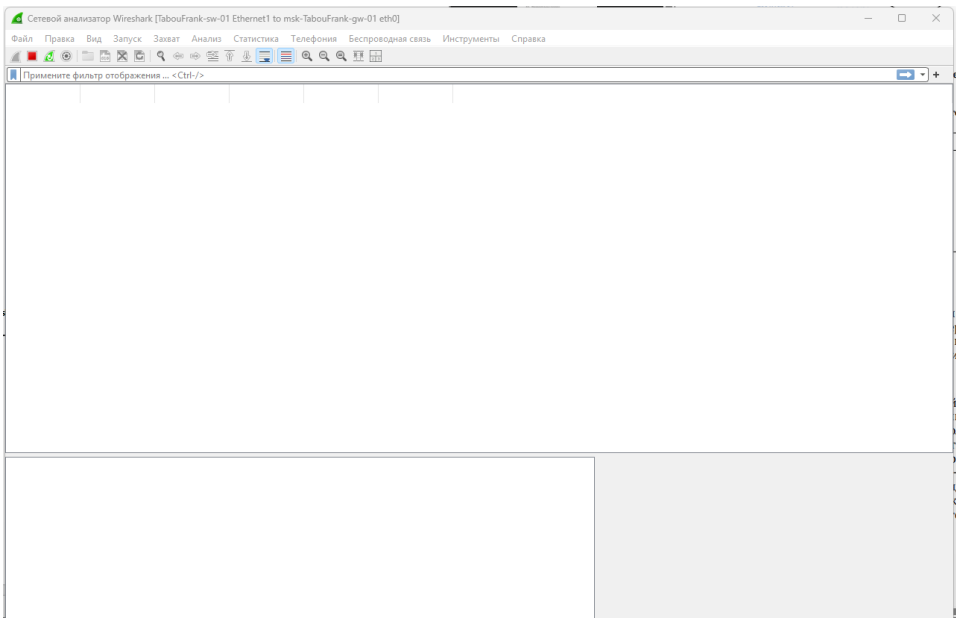


Рис. 2: Настройка IPv6 на PC1

```
PC1-TabouFrank - PuTTY
Executing the startup file
Hostname is too long. (Maximum 12 characters)

VPCS> ip 10.0.10.10/24 10.0.10.1
Checking for duplicate address...
VPCS : 10.0.10.10 255.255.255.0 gateway 10.0.10.1

VPCS> save
Saving startup configuration to startup.vpc
. done

VPCS> show ip

NAME       : VPCS[1]
IP/MASK    : 10.0.10.10/24
GATEWAY    : 10.0.10.1
DNS        :
MAC        : 00:50:79:66:68:00
LPORT      : 10016
RHOST:PORT : 127.0.0.1:10017
MTU        : 1500

VPCS> 
```

Рис. 3: Настройка IPv6 на PC2

```
PC2-TabouFrank - PuTTY

VPCS> ip 10.0.11.10/24 10.0.11.1
Checking for duplicate address...
VPCS : 10.0.11.10 255.255.255.0 gateway 10.0.11.1

VPCS> save
Saving startup configuration to startup.vpc
. done

VPCS> shop ip
Bad command: "shop ip". Use ? for help.

VPCS> show ip

NAME       : VPCS[1]
IP/MASK    : 10.0.11.10/24
GATEWAY    : 10.0.11.1
DNS        :
MAC        : 00:50:79:66:68:01
LPORT      : 10036
RHOST:PORT : 127.0.0.1:10037
MTU        : 1500

VPCS> 
```

Рис. 4: Изменение имени и подготовка gw-01

```
msk-frank-gw-01 ~ frr
* Setting keymap ... [ ok ]
* Starting networking ... * lo ... [ ok ]
* Starting busybox syslog ... [ ok ]
* Seeding 256 bits and crediting
* Saving 256 bits of creditable seed for next boot
* Starting busybox acpid ... [ ok ]
* Starting busybox crond ... [ ok ]
Started watchfrr
* Starting sshd ... [ ok ]

Hello, this is FRRouting (version 8.2.2).
Copyright 1996-2005 Kunihiro Ishiguro, et al.


frr# configure terminal
frr(config)# hostname msk-frank-gw-01
msk-frank-gw-01(config)# interface eth0
msk-frank-gw-01(config-if)# ip address 10.0.10.1/24
msk-frank-gw-01(config-if)# no shutdown
msk-frank-gw-01(config-if)# exit
msk-frank-gw-01(config)# interface eth1
msk-frank-gw-01(config-if)# ip address 10.0.1.1/24
msk-frank-gw-01(config-if)# no shutdown
msk-frank-gw-01(config-if)#
```

Рис. 5: Настройка интерфейсов gw-01

```
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-01
service integrated-vtysh-config
!
interface eth0
 ip address 10.0.10.1/24
exit
!
interface eth1
 ip address 10.0.1.1/24
exit
!
interface eth2
 ip address 10.0.4.2/24
exit
!
end
msk-frank-gw-01#
```


Рис. 6: Изменение имени gw-02

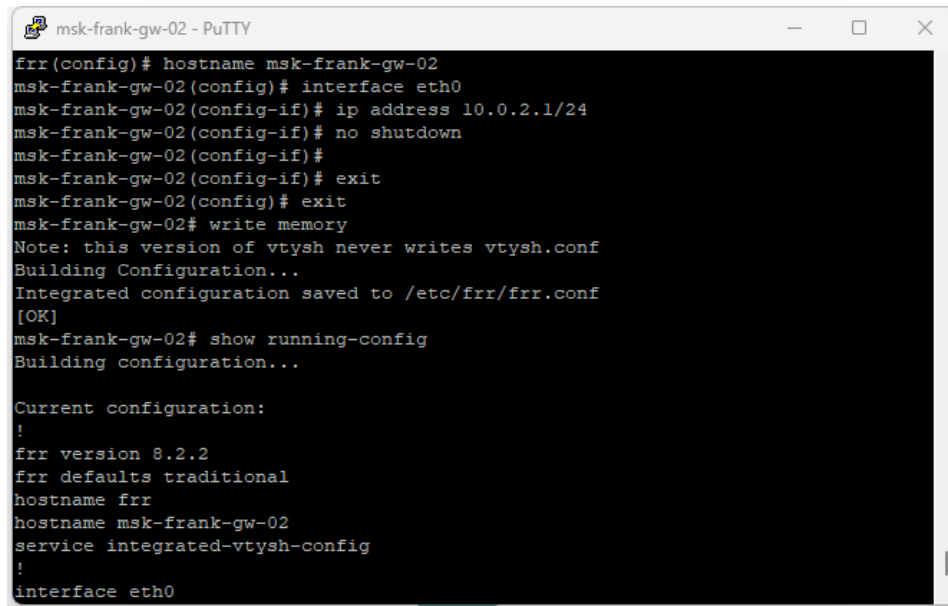

```
msk-frank-gw-02 - PuTTY
frr(config)# hostname msk-frank-gw-02
msk-frank-gw-02(config)# interface eth0
msk-frank-gw-02(config-if)# ip address 10.0.2.1/24
msk-frank-gw-02(config-if)# no shutdown
msk-frank-gw-02(config-if)#
msk-frank-gw-02(config-if)# exit
msk-frank-gw-02(config)# exit
msk-frank-gw-02# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-02# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-02
service integrated-vtysh-config
!
interface eth0
```


Рис. 7: Настройка интерфейсов gw-02

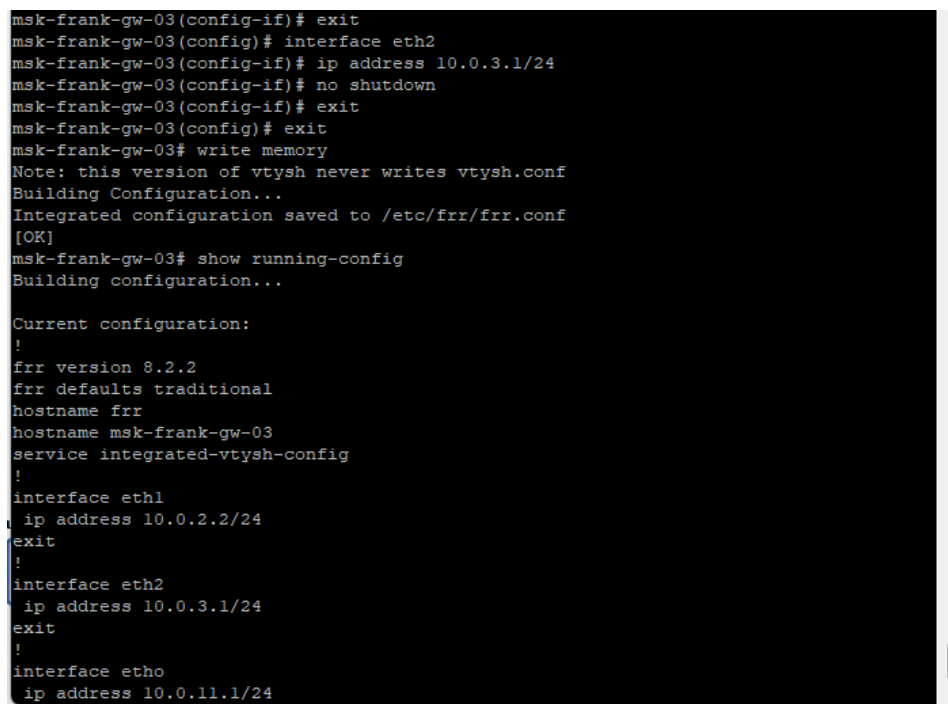

```
msk-frank-gw-03(config-if)# exit
msk-frank-gw-03(config)# interface eth2
msk-frank-gw-03(config-if)# ip address 10.0.3.1/24
msk-frank-gw-03(config-if)# no shutdown
msk-frank-gw-03(config-if)# exit
msk-frank-gw-03(config)# exit
msk-frank-gw-03# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-03# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-03
service integrated-vtysh-config
!
interface eth1
 ip address 10.0.2.2/24
exit
!
interface eth2
 ip address 10.0.3.1/24
exit
!
interface eth0
 ip address 10.0.11.1/24
```

Рис. 8: Изменение имени gw-03

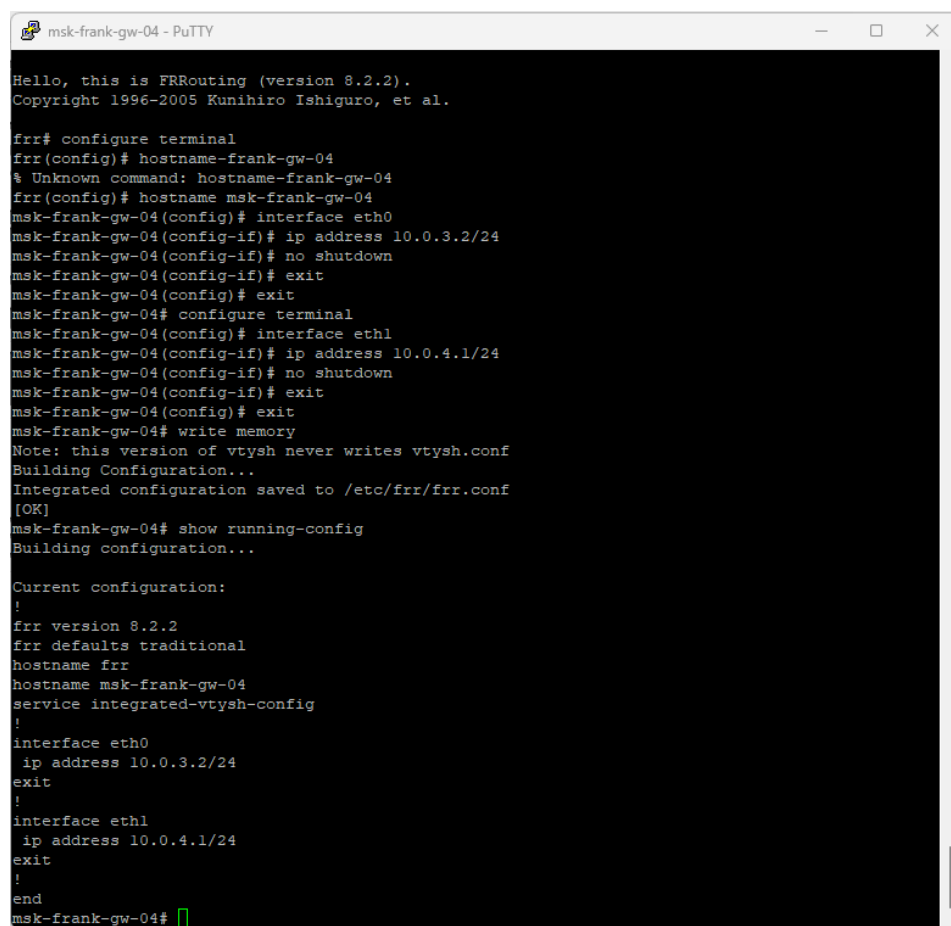

```
msk-frank-gw-04 - PuTTY

Hello, this is FRRouting (version 8.2.2).
Copyright 1996-2005 Kunihiro Ishiguro, et al.

frr# configure terminal
frr(config)# hostname frank-gw-04
% Unknown command: hostname-frank-gw-04
frr(config)# hostname msk-frank-gw-04
msk-frank-gw-04(config)# interface eth0
msk-frank-gw-04(config-if)# ip address 10.0.3.2/24
msk-frank-gw-04(config-if)# no shutdown
msk-frank-gw-04(config-if)# exit
msk-frank-gw-04(config)# exit
msk-frank-gw-04# configure terminal
msk-frank-gw-04(config)# interface eth1
msk-frank-gw-04(config-if)# ip address 10.0.4.1/24
msk-frank-gw-04(config-if)# no shutdown
msk-frank-gw-04(config-if)# exit
msk-frank-gw-04(config)# exit
msk-frank-gw-04# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-04# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-04
service integrated-vtysh-config
!
interface eth0
 ip address 10.0.3.2/24
exit
!
interface eth1
 ip address 10.0.4.1/24
exit
!
end
msk-frank-gw-04#
```

Рис. 9: Настройка интерфейсов gw-03


```
PC1-TabouFrank - PuTTY
MAC      : 00:50:79:66:68:00
LPORT    : 10016
RHOST:PORT : 127.0.0.1:10017
MTU      : 1500

VPCS> ip 2001:10::a/64
PC1 : 2001:10::a/64

VPCS> save
Saving startup configuration to startup.vpc
. done

VPCS> show ip

NAME      : VPCS[1]
IP/MASK   : 10.0.10.10/24
GATEWAY   : 10.0.10.1
DNS       :
MAC       : 00:50:79:66:68:00
LPORT     : 10016
RHOST:PORT : 127.0.0.1:10017
MTU       : 1500

VPCS> █
```

Рис. 10: Проверка IPv6 на PC1

```
PC2-TabouFrank - PuTTY
LPORT    : 10036
RHOST:PORT : 127.0.0.1:10037
MTU      : 1500

VPCS> ip 2001:11::a/64
PC1 : 2001:11::a/64

VPCS> save
Saving startup configuration to startup.vpc
. done

VPCS> show ipv6

NAME      : VPCS[1]
LINK-LOCAL SCOPE : fe80::250:79ff:fe66:6801/64
GLOBAL SCOPE    : 2001:11::a/64
DNS          :
ROUTER LINK-LAYER :
MAC         : 00:50:79:66:68:01
LPORT       : 10036
RHOST:PORT   : 127.0.0.1:10037
MTU         : 1500

VPCS> █
```

Рис. 11: Проверка IPv6 на PC2

```
msk-frank-gw-01 - PuTTY
ip address 10.0.4.2/24
exit
!
end
msk-frank-gw-01# configure terminal
msk-frank-gw-01(config)# ipv6 forwarding
msk-frank-gw-01(config)# interface eth0
msk-frank-gw-01(config-if)# ipv6
% Command incomplete: ipv6
msk-frank-gw-01(config-if)# ipv6 address 2001:10::1/64
msk-frank-gw-01(config-if)# no ipv6 nd suppress-ra
msk-frank-gw-01(config-if)# ipv6 nd prefix 2001:10::/64
msk-frank-gw-01(config-if)# no shutdown
msk-frank-gw-01(config-if)# exit
msk-frank-gw-01(config)# interface eth1
msk-frank-gw-01(config-if)# ipv6 address 2001:1::1/64
msk-frank-gw-01(config-if)# no shutdown
msk-frank-gw-01(config-if)# exit
msk-frank-gw-01(config)# interface eth2
msk-frank-gw-01(config-if)# ipv6 address 2001:4::2/64
msk-frank-gw-01(config-if)# no shutdown
msk-frank-gw-01(config-if)# exit
msk-frank-gw-01(config)# exit
msk-frank-gw-01#
```

Рис. 12: Проверка связности с gw-01

```
msk-frank-gw-02 - PuTTY
service integrated-vtysh-config
!
interface eth0
ip address 10.0.2.1/24
exit
!
end
msk-frank-gw-02# configure terminal
msk-frank-gw-02(config)# ipv6 forwarding
msk-frank-gw-02(config)# interface eth0
msk-frank-gw-02(config-if)# ipv6 address 2001:1::2/64
msk-frank-gw-02(config-if)# no shutdown
msk-frank-gw-02(config-if)# exit
msk-frank-gw-02(config)# interface eth1
msk-frank-gw-02(config-if)# ipv6 address 2001:2::1/64
msk-frank-gw-02(config-if)# no shutdown
msk-frank-gw-02(config-if)# exit
msk-frank-gw-02(config)# exit
msk-frank-gw-02# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-02#
```

Рис. 13: Анализ трафика между маршрутизаторами


```
msk-frank-gw-02 - PuTTY
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-02# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-02
service integrated-vtysh-config
!
interface eth0
 ip address 10.0.2.1/24
 ipv6 address 2001:1::2/64
exit
!
interface eth1
 ipv6 address 2001:2::1/64
exit
!
end
msk-frank-gw-02#
```

Рис. 14: Настройка RIP на gw-01

```
msk-frank-gw-03 - PuTTY
interface eth0
 ip address 10.0.11.1/24
exit
!
end
msk-frank-gw-03# configure interface
% Unknown command: configure interface
msk-frank-gw-03# configure terminal
msk-frank-gw-03(config)# ipv6 forwarding
msk-frank-gw-03(config)# interface eth0
msk-frank-gw-03(config-if)# ipv6 address 2001:11::1/64
msk-frank-gw-03(config-if)# no ipv6 nd suppress-ra
% Unknown command: no ipv6 nd suppress-ra
msk-frank-gw-03(config-if)# no ipv6 nd suppress-ra
msk-frank-gw-03(config-if)# ipv6 nd prefix 2001:11::/64
msk-frank-gw-03(config-if)# no shutdown
msk-frank-gw-03(config-if)# exit
msk-frank-gw-03(config)# interface eth1
msk-frank-gw-03(config-if)# ipv6 address 2001:2::2/64
msk-frank-gw-03(config-if)# no shutdown
msk-frank-gw-03(config-if)# exit
msk-frank-gw-03(config)# interface eth2
msk-frank-gw-03(config-if)# ipv6 address 2001:3::1/64
msk-frank-gw-03(config-if)# no shutdown
msk-frank-gw-03(config-if)# exit
msk-frank-gw-03(config)# exit
msk-frank-gw-03# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-03#
```

Рис. 15: Настройка RIP на gw-02

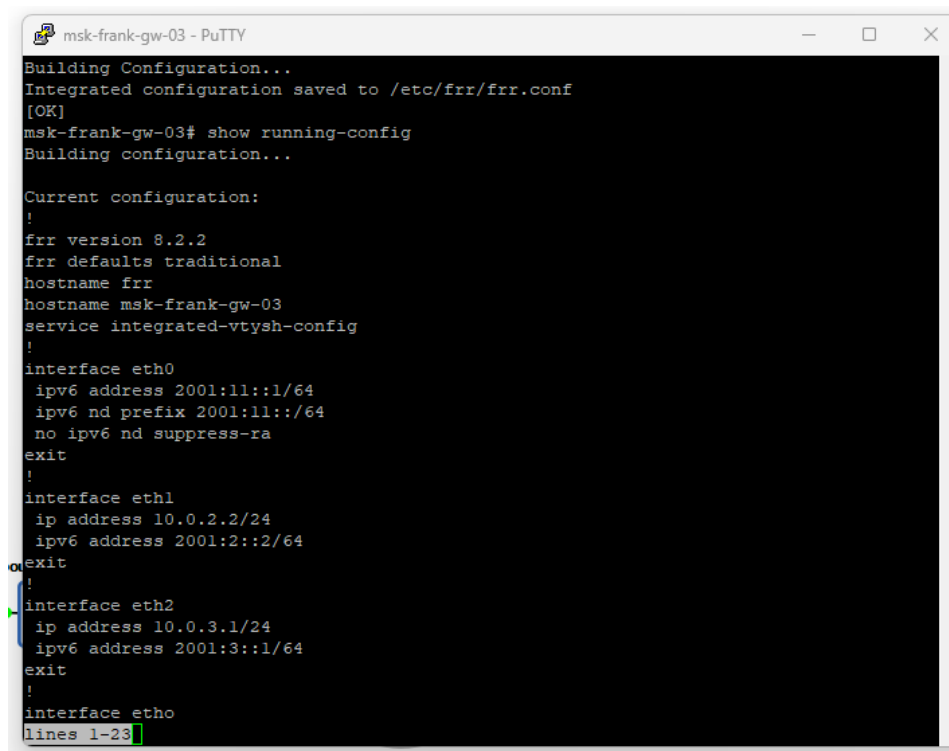

The image shows a PuTTY terminal window titled "msk-frank-gw-03 - PuTTY". The terminal output displays the process of building and saving an FRR configuration, followed by a "show running-config" command. The configuration includes settings for the FRR version, defaults, hostname, service, and three interfaces (eth0, eth1, eth2) with their respective IP and IPv6 addresses. The terminal text is as follows:

```
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-03# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-03
service integrated-vtysh-config
!
interface eth0
  ipv6 address 2001:11::1/64
  ipv6 nd prefix 2001:11::/64
  no ipv6 nd suppress-ra
exit
!
interface eth1
  ip address 10.0.2.2/24
  ipv6 address 2001:2::2/64
exit
!
interface eth2
  ip address 10.0.3.1/24
  ipv6 address 2001:3::1/64
exit
!
interface etho
lines 1-23
```

Рис. 16: Настройка RIP на gw-03

```
msk-frank-gw-04 - PuTTY
ip address 10.0.4.1/24
exit
!
end
msk-frank-gw-04# configure terminal
msk-frank-gw-04(config)# ipv6 forwarding
msk-frank-gw-04(config)# ipv6 address 2001:3::2/64
% Unknown command: ipv6 address 2001:3::2/64
msk-frank-gw-04(config)# interface eth0
msk-frank-gw-04(config-if)# ipv6 address 2001:3::2/64
msk-frank-gw-04(config-if)# no shutdown
msk-frank-gw-04(config-if)# exit
msk-frank-gw-04(config)# interface eth1
msk-frank-gw-04(config-if)# ipv6 address 2001:4::1/64
msk-frank-gw-04(config-if)# no shutdown
msk-frank-gw-04(config-if)# exit
msk-frank-gw-04(config)# exit
msk-frank-gw-04# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-04# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msk-frank-gw-04
service integrated-vtysh-config
!
interface eth0
 ip address 10.0.3.2/24
 ipv6 address 2001:3::2/64
exit
!
interface eth1
 ip address 10.0.4.1/24
 ipv6 address 2001:4::1/64
exit
!
end
msk-frank-gw-04#
```

Рис. 17: Проверка связности после настройки RIP

```
msk-frank-gw-01 - PuTTY
ip address 10.0.1.1/24
ipv6 address 2001:1::1/64
exit
!
interface eth2
ip address 10.0.4.2/24
ipv6 address 2001:4::2/64
exit
!
end
msk-frank-gw-01# configure terminal
msk-frank-gw-01(config)# router rip
msk-frank-gw-01(config-router)# version 2
msk-frank-gw-01(config-router)# network eth0
msk-frank-gw-01(config-router)# network eth1
msk-frank-gw-01(config-router)# network eth2
msk-frank-gw-01(config-router)# exit
msk-frank-gw-01(config)# exit
msk-frank-gw-01# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-01#
```

Рис. 18: Анализ трафика ICMP и RIP

```
msk-frank-gw-02 - PuTTY
ipv6 address 2001:1::2/64
exit
!
interface eth1
ipv6 address 2001:2::1/64
exit
!
end
msk-frank-gw-02# configure terminal
msk-frank-gw-02(config)#
msk-frank-gw-02(config)# router rip
msk-frank-gw-02(config-router)# version 2
msk-frank-gw-02(config-router)# network eth0
msk-frank-gw-02(config-router)# network eth1
msk-frank-gw-02(config-router)# network eth2
msk-frank-gw-02(config-router)# exit
msk-frank-gw-02(config)# exit
msk-frank-gw-02# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msk-frank-gw-02#
```

Рис. 19: Настройка туннеля на gw-01

```
msh-frank-gw-04 - PuTTY
msh-frank-gw-04(config)# interface eth1
msh-frank-gw-04(config-if)# ipv6 address 2001:4::1/64
msh-frank-gw-04(config-if)# no shutdown
msh-frank-gw-04(config-if)# exit
msh-frank-gw-04(config)# exit
msh-frank-gw-04# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msh-frank-gw-04# show running-config
Building configuration...

Current configuration:
!
frr version 8.2.2
frr defaults traditional
hostname frr
hostname msh-frank-gw-04
service integrated-vtysh-config
!
interface eth0
 ip address 10.0.3.2/24
 ipv6 address 2001:3::2/64
exit
!
interface eth1
 ip address 10.0.4.1/24
 ipv6 address 2001:4::1/64
exit
!
end
msh-frank-gw-04# configure terminal
msh-frank-gw-04(config)# router rip
msh-frank-gw-04(config-router)# version 2
msh-frank-gw-04(config-router)# network eth0
msh-frank-gw-04(config-router)# network eth1
msh-frank-gw-04(config-router)# exit
msh-frank-gw-04(config)# exit
msh-frank-gw-04# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
msh-frank-gw-04#
```

Рис. 20: Настройка туннеля на gw-02

```
msh-frank-gw-04# show ip rip status
Routing Protocol is "rip"
  Sending updates every 30 seconds with +/-50%, next due in 12 seconds
  Timeout after 180 seconds, garbage collect after 120 seconds
  Outgoing update filter list for all interface is not set
  Incoming update filter list for all interface is not set
  Default redistribution metric is 1
  Redistributing:
  Default version control: send version 2, receive version 2
    Interface      Send  Recv  Key-chain
    eth0           2     2
    eth1           2     2
  Routing for Networks:
    eth0
    eth1
  Routing Information Sources:
    Gateway         BadPackets  BadRoutes  Distance  Last Update
    10.0.3.1         0           0          120      00:00:08
    10.0.4.2         0           0          120      00:00:08
  Distance: (default is 120)
msh-frank-gw-04#
```

Рис. 21: Статический IPv6-маршрут на gw-01

```

msk-frank-gw-01# show ip route rip
Codes: K - kernel route, C - connected, S - static, R - RIP,
       O - OSPF, I - IS-IS, B - BGP, E - EIGRP, N - NHRP,
       T - Table, v - VNC, V - VNC-Direct, A - Babel, F - PBR,
       f - OpenFabric,
       > - selected route, * - FIB route, q - queued, r - rejected, b - backup
       t - trapped, o - offload failure

R>* 10.0.2.0/24 [120/3] via 10.0.4.1, eth2, weight 1, 00:04:38
R>* 10.0.3.0/24 [120/2] via 10.0.4.1, eth2, weight 1, 00:04:38
msk-frank-gw-01# show ip rip
Codes: R - RIP, C - connected, S - Static, O - OSPF, B - BGP
Sub-codes:
        (n) - normal, (s) - static, (d) - default, (r) - redistribute,
        (i) - interface

      Network      Next Hop      Metric From      Tag Time
C(i) 10.0.1.0/24   0.0.0.0         1 self          0
R(n) 10.0.2.0/24   10.0.4.1        3 10.0.4.1       0 02:42
R(n) 10.0.3.0/24   10.0.4.1        2 10.0.4.1       0 02:42
C(i) 10.0.4.0/24   0.0.0.0         1 self          0
C(i) 10.0.10.0/24  0.0.0.0         1 self          0
msk-frank-gw-01# show ip rip status
Routing Protocol is "rip"
  Sending updates every 30 seconds with +/-50%, next due in 27 seconds
  Timeout after 180 seconds, garbage collect after 120 seconds
  Outgoing update filter list for all interface is not set
  Incoming update filter list for all interface is not set
  Default redistribution metric is 1
  Redistributing:
  Default version control: send version 2, receive version 2
    Interface      Send Recv  Key-chain
    eth0           2     2
    eth1           2     2
    eth2           2     2
  Routing for Networks:
    eth0

```

Рис. 22: Статический IPv6-маршрут на gw-02

```

PC1-TabouFrank - PuTTY
MTU      : 1500

VPCS> ping 10.0.11.10

*10.0.10.1 icmp_seq=1 ttl=64 time=1.073 ms (ICMP type:3, code:0, Destination net
work unreachable)
*10.0.10.1 icmp_seq=2 ttl=64 time=1.484 ms (ICMP type:3, code:0, Destination net
work unreachable)
*10.0.10.1 icmp_seq=3 ttl=64 time=2.758 ms (ICMP type:3, code:0, Destination net
work unreachable)
*10.0.10.1 icmp_seq=4 ttl=64 time=3.314 ms (ICMP type:3, code:0, Destination net
work unreachable)
10.0.11.10 icmp_seq=5 timeout

VPCS> trace 10.0.11.10 -P 6
trace to 10.0.11.10, 8 hops max (TCP), press Ctrl+C to stop
 1  *10.0.10.1  1.450 ms (ICMP type:3, code:0, Destination network unreachable)
) *
 2  * * * *
 3  * * * *
 4  * * * *
 5  * * * *
 6  * * * *

```

Рис. 23: Проверка связности с PC1


```
msk-frank-gw-01# show ip rip
Codes: R - RIP, C - connected, S - Static, O - OSPF, B - BGP
Sub-codes:
      (n) - normal, (s) - static, (d) - default, (r) - redistribute,
      (i) - interface

      Network      Next Hop      Metric From      Tag Time
C(i) 10.0.1.0/24    0.0.0.0        1 self           0
R(n) 10.0.2.0/24    10.0.4.1       3 10.0.4.1        0 02:35
R(n) 10.0.3.0/24    10.0.4.1       2 10.0.4.1        0 02:35
C(i) 10.0.4.0/24    0.0.0.0        1 self           0
C(i) 10.0.10.0/24   0.0.0.0        1 self           0
msk-frank-gw-01#
```


Рис. 24: Проверка связности с PC2

```
msk-frank-gw-01 - PuTTY
* Saving 256 bits of creditable seed for next boot
* Starting busybox acpid ... [ ok ]
* Starting busybox crond ... [ ok ]
Started watchfrr
* Starting sshd ... [ ok ]

Hello, this is FRRouting (version 8.2.2).
Copyright 1996-2005 Kunihiro Ishiguro, et al.

frr# configure terminal
frr(config)# show ip rip
% Unknown command: show ip rip
frr(config)# router ripng
frr(config-router)# network eth0
frr(config-router)# network eth1
frr(config-router)# exit
frr(config)# exit
frr# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
frr#
```

Рис. 25: Общий вид трафика IPv6

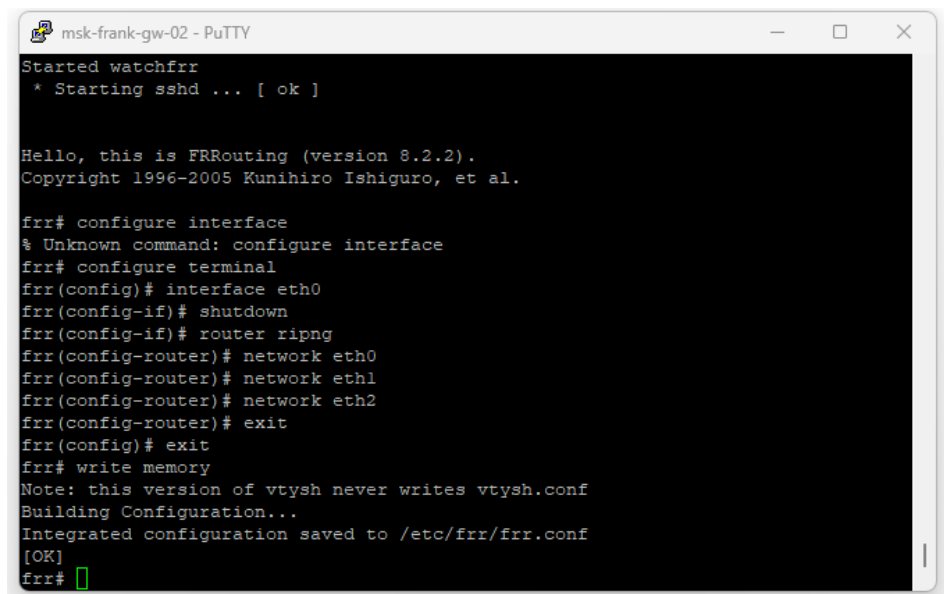

```
msk-frank-gw-02 - PuTTY
Started watchfrr
* Starting sshd ... [ ok ]

Hello, this is FRRouting (version 8.2.2).
Copyright 1996-2005 Kunihiro Ishiguro, et al.

frr# configure interface
% Unknown command: configure interface
frr# configure terminal
frr(config)# interface eth0
frr(config-if)# shutdown
frr(config-if)# router ripng
frr(config-router)# network eth0
frr(config-router)# network eth1
frr(config-router)# network eth2
frr(config-router)# exit
frr(config)# exit
frr# write memory
Note: this version of vtysh never writes vtysh.conf
Building Configuration...
Integrated configuration saved to /etc/frr/frr.conf
[OK]
frr#
```

Рис. 26: Структура инкапсулированного пакета