HIGGS accuracy vs. wall throughput on XDNA2

Measured points use the CPU-head throughput rows from Table 4 and the retained accuracy rows from Table 3.
All three retained operating points now have measured hardware throughput.

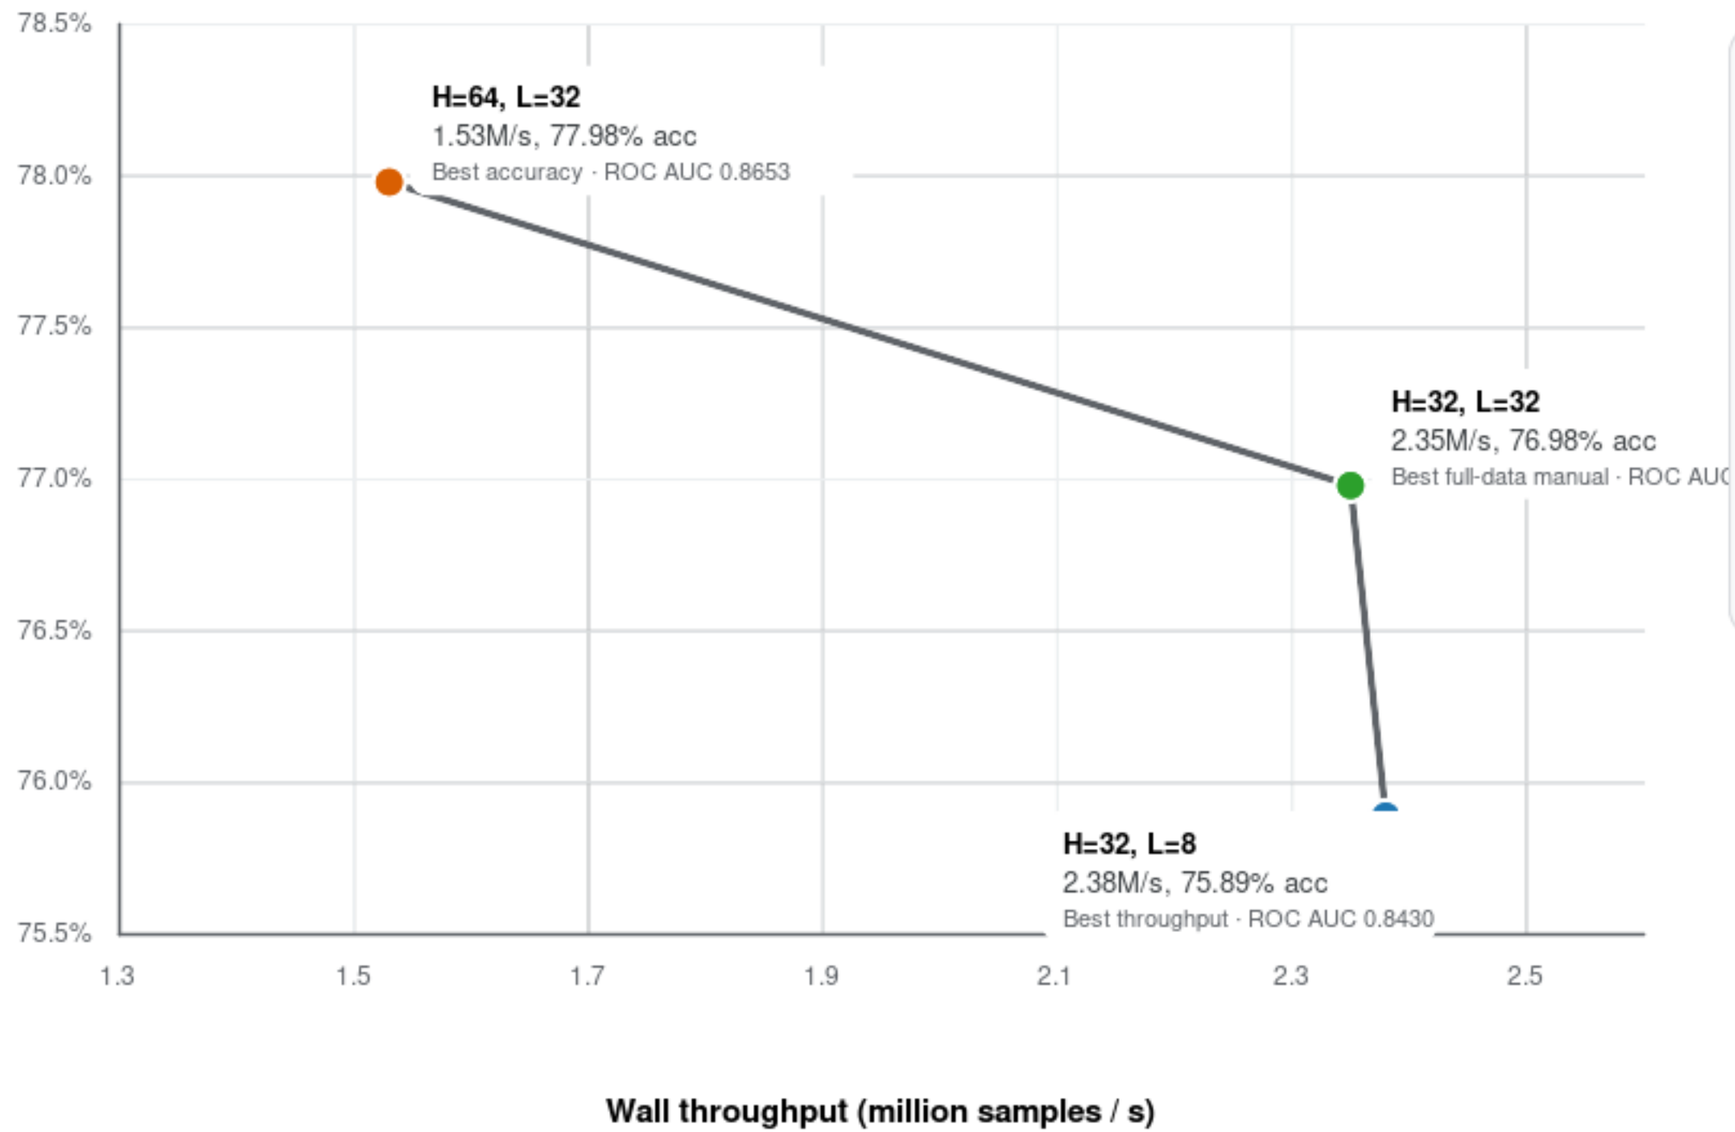

Retained operating points

- H=32, L=8 (throughput point)
  75.89% acc · 2.38M/s wall
  ROC AUC 0.8430
- H=32, L=32 (best full-data manual)
  76.98% acc · 2.35M/s wall
  ROC AUC 0.8542
- H=64, L=32 tuned (best accuracy)
  77.98% acc · 1.53M/s wall
  ROC AUC 0.8653