HIGGS accuracy vs. wall throughput on XDNA2

Measured points use the B=8 async wall-throughput rows from Table 4 and the retained accuracy rows from Table 3. All three retained operating points now have measured hardware throughput.

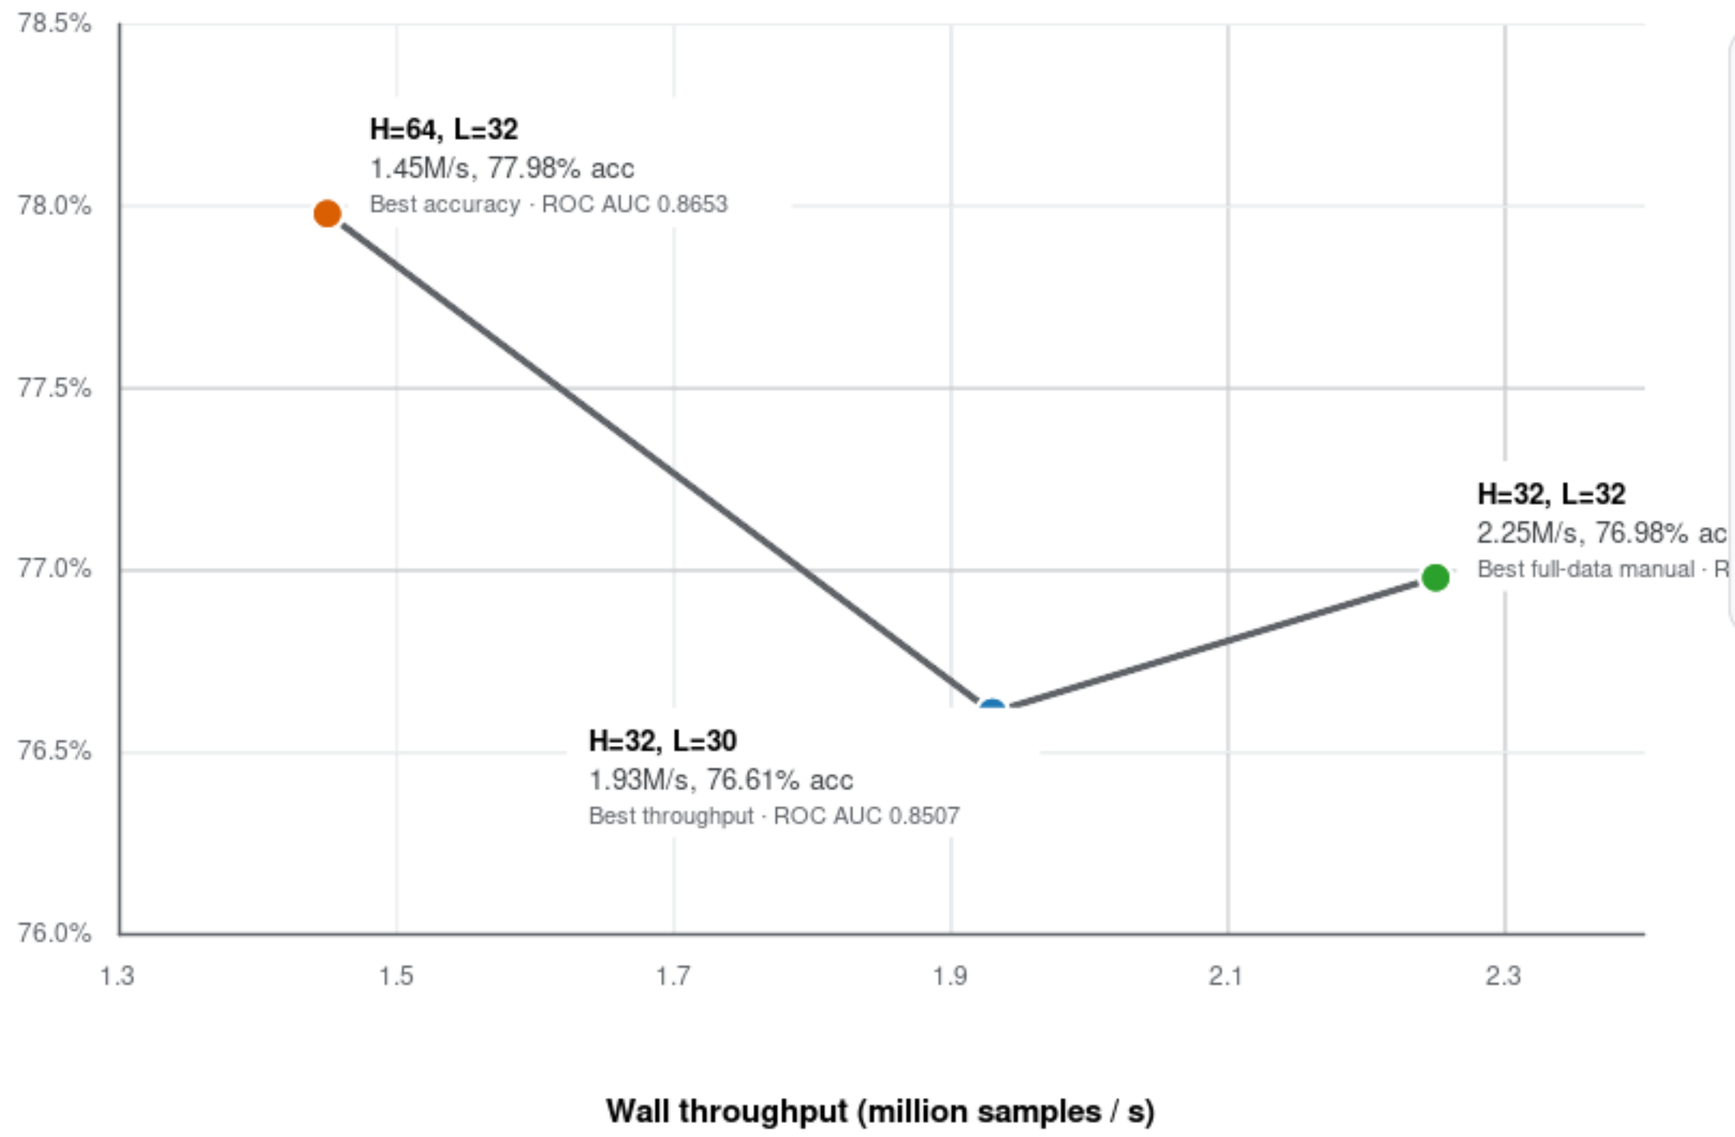

Retained operating points

- H=32, L=30 (throughput point)
  76.61% acc · 1.93M/s wall
  ROC AUC 0.8507
- H=32, L=32 (best full-data manual)
  76.98% acc · 2.25M/s wall
  ROC AUC 0.8542
- H=64, L=32 tuned (best accuracy)
  77.98% acc · 1.45M/s wall
  ROC AUC 0.8653