
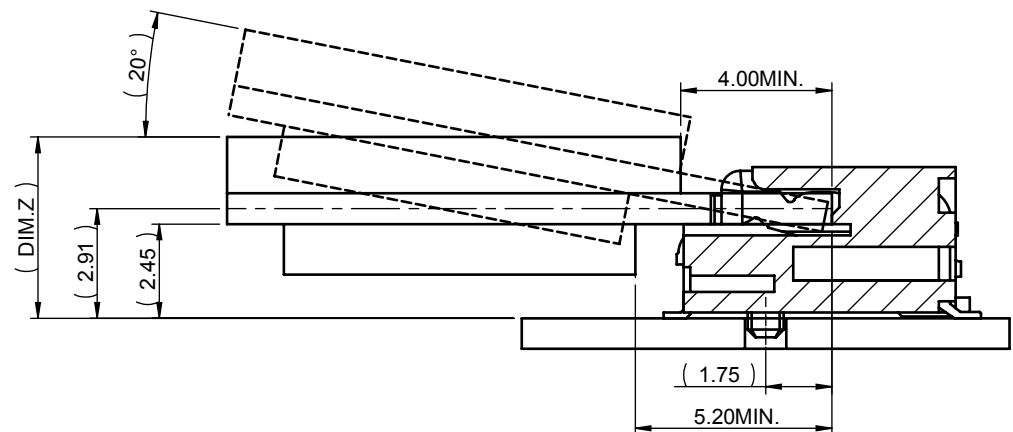
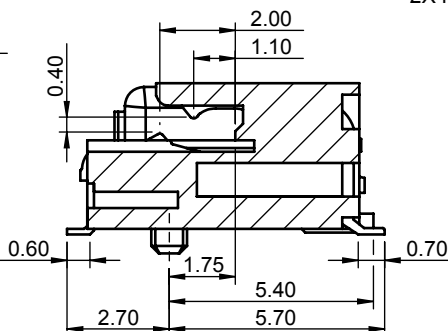
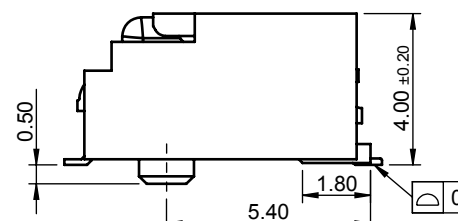
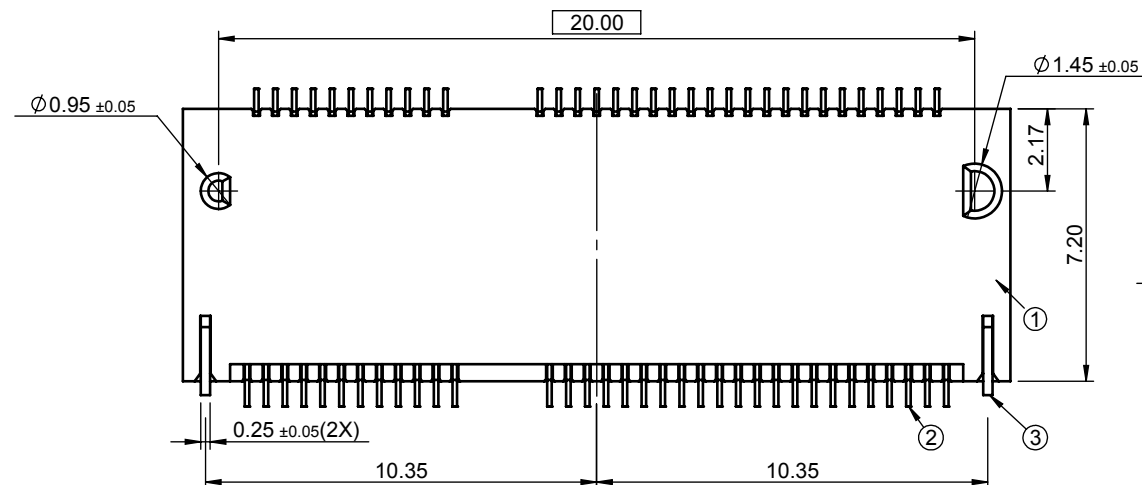
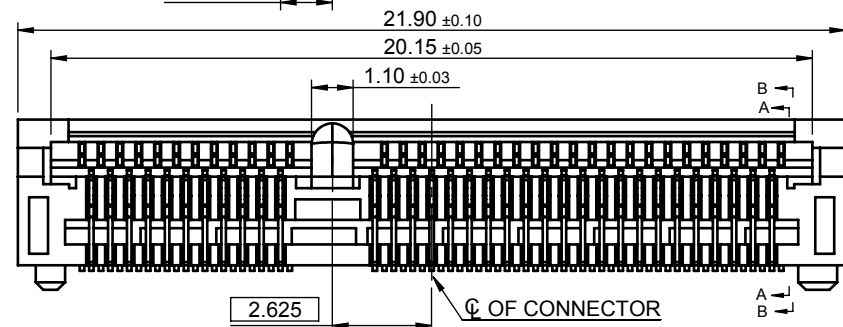


SOLIDWORK GENERATED DRAWING,DON'T CHANGE BY HAND

REV.	ECN. NO.	APPD.
A	BC-15-0014961	C.S. Li
B	BC-15-0045301	C.S. Li
C	BC-17-0017624	Davy Bu
D	BC-18-0039441	Davy Bu

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING: 0.5 AMPERE MAX. PER PIN.
 - VOLTAGE RATING: 50V AC.
 - INSULATION RESISTANCE :500 MEGAOHMS MIN. AT 500V DC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC RMS AT 60Hz, FOR 1 MINUTE.
 - CONTACT RESISTANCE: 55 MILLIOHMS MAX. PER PIN INITIAL.
 $\Delta R=20$ MILLIOHMS MAX. PER PIN AFTER FULL ENVIRONMENT TESTING.
 - MECHANICAL CHARACTERISTICS: DURABILITY: 60 MATING CYCLES.
 - OPERATION TEMPERATURE: -40°C TO +80°C.
 - RECOMMENDED PROCESS CONDITION: SMT, PEAK TEMPERATURE: 260°C, 10~20S.
 - PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAIL & AVAILABILITY.

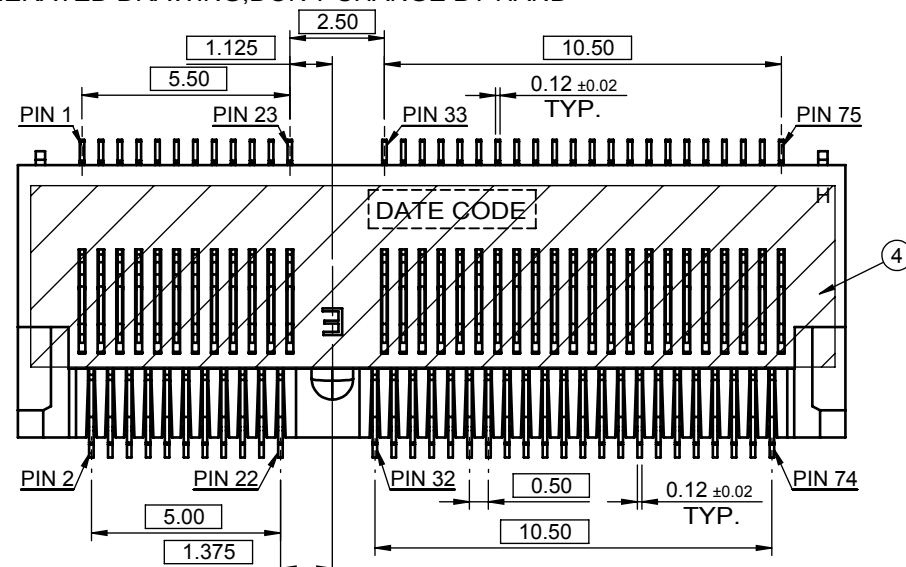

SECTION B-B

DATE CODE: * * * * *

YEAR MONTH LINE NO. DAY

DIM.Z MAX.(mm)	MODULE TYPE
4.55	S1&D1
4.70	S2&D2
4.85	S3&D3&D4&D5
5.10	S4
5.35	S5

PART NO. DESCRIPTION: AS 0 BC 2 * - S 40 B E - * H

EDGE CARD CONNECTOR

M.2 (NGFF) CONNECTOR SERIES

75 PIN

SMT

CONTACT AREA PLATING

1=GOLD FLASH

Y=5u" GOLD PLATING

6=10u" GOLD PLATING

7=15u" GOLD PLATING

3=30u" GOLD PLATING

HALOGEN FREE & LEAD FREE

7=32MM WIDTH TAPE&REEL&OUTWARD

L=44MM WIDTH TAPE&REEL&INWARD

KEY NAME

BLACK COLOR







4.0mm HEIGHT

STANDARD TYPE

④	PI-FILM	POLYIMIDE	1	BROWN COLOR
③	METAL TAB	STAINLESS STEEL (SUS301)	2	10u" NICKEL UNDER PLATING 100u" MATTE TIN PLATING AT SOLDER AREA
②	CONTACT	PHOSPHOR BRONZE (C5210R-SH)	67	50u" NICKEL UNDER PLATING GOLD FLASH PLATING AT SOLDER AREA GOLD FLASH OR 5u" GOLD PLATING OR 10u" GOLD PLATING OR 15u" GOLD PLATING OR 30u" GOLD PLATING AT CONTACT AREA
①	HOUSING	LCP (6808)	1	UL94V-0, HALOGEN FREE, BLACK COLOR
ITEM	DESCRIPTION	MATERIAL	Q'TY	TREATMENT
X. ±	0.30	X. °	UNITS	mm
.X ±	0.25	.X °	MAT'L	
.XX ±	0.15	.XX °	FINISH	
.XXX ±		.XXX °	Q'TY	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				
NAME (INTENDED USE)				FOXCONN®
M.2 (NGFF) CONNECTOR (KEYE)				FOXCONN INTERCONNECT TECHNOLOGY LIMITED.
PART NO. (INTENDED USE)				CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL
AS0BC2*-S40BE-*H				TITLE: CUSTOMER DRAWING
APPD: Davy Bu				DWG NO.: 317-0000-2478
CHKD: Jack Lee				
DR: Allen Zhao 10/16/18				
				SCALE SHEET REV.
				N/A 1/5 D

SOLIDWORK GENERATED DRAWING,DON'T CHANGE BY HAND

REV.	ECN. NO.	APPD.

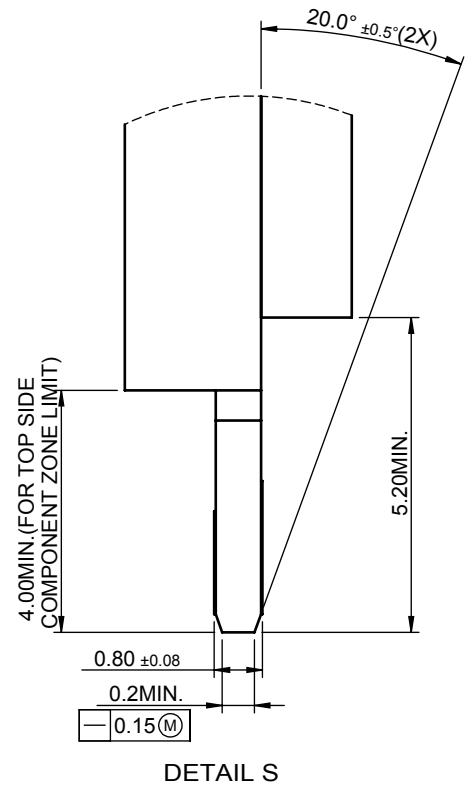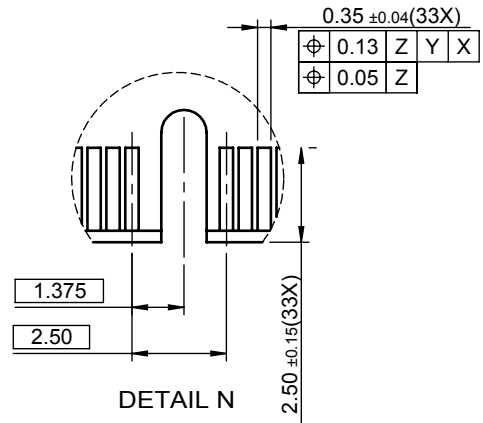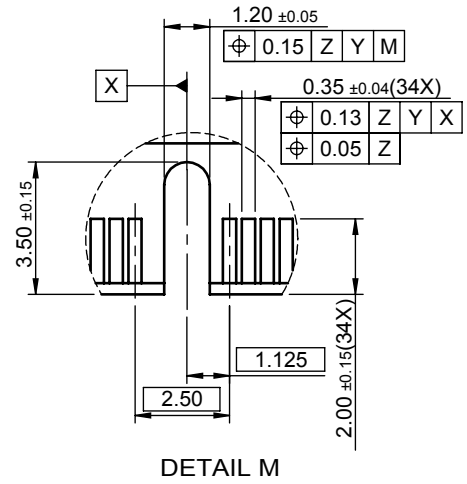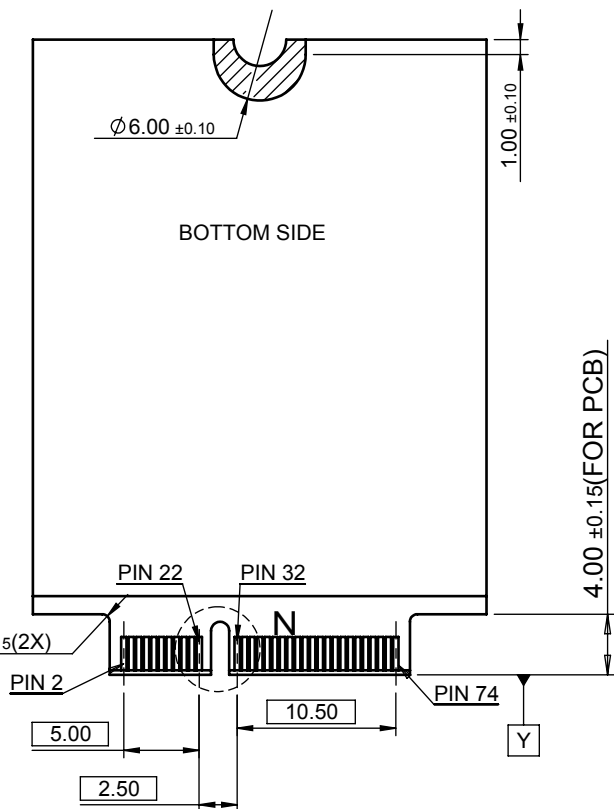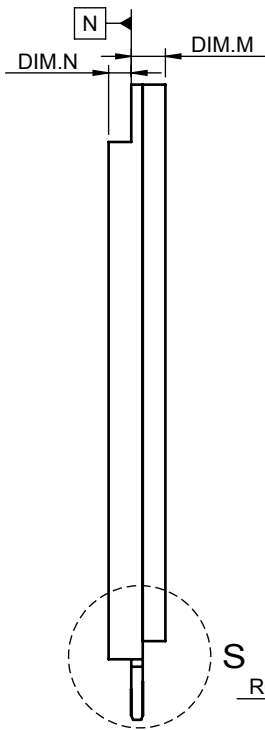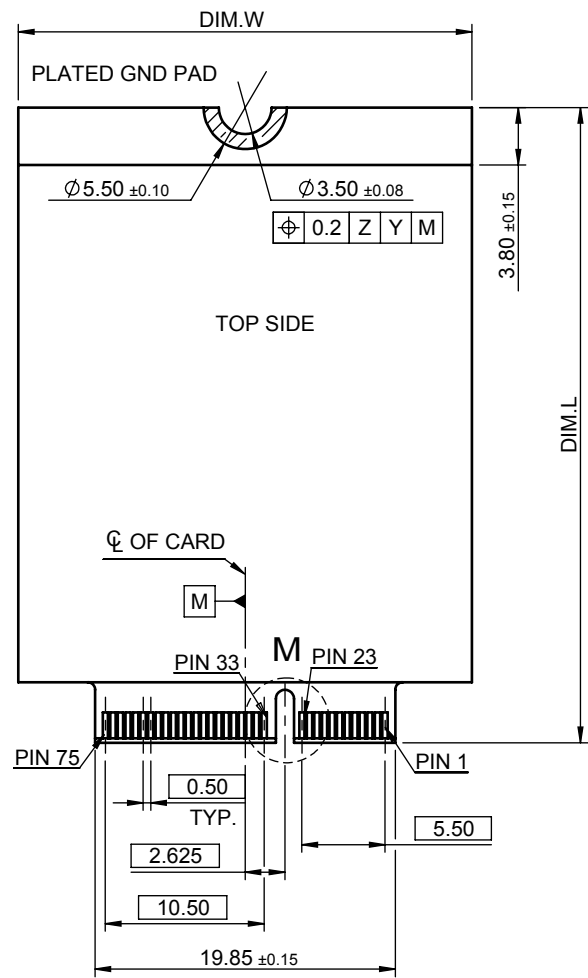

TYPE XX XX-XX-X

KEY ID

COMPONENT MAX HEIGHT(mm)			
TYPE	DIM.N	DIM.M	
S1	1.2	0	
S2	1.35	0	
S3	1.5	0	
S4	1.75	0	
S5	2.0	0	
D1	1.2	1.35	
D2	1.35	1.35	
D3	1.5	1.35	
D4	1.5	0.7	
D5	1.5	1.5	


LENGTH(mm)	30
DIM.L	42
	60
	80
	110

WIDTH(mm)	22
DIM.W	30

X. ± 0.15	X. ° ±	UNITS mm	NAME(INTENDED USE)	FOXCONN®			
.X ± 0.10	.X ° ±		MAT'L	M.2(NGFF) CONNECTOR(KEYE)	FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		
.XX ± 0.05	.XX ° ±	FINISH		PART NO.(INTENDED USE)	CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL		
.XXX ±	.XXX ° ±		AS0BC2*-S40BE-*H	TITLE: CUSTOMER DRAWING			
			APPD: Davy Bu	DWG NO.: 317-0000-2478			
			CHKD: Jack Lee				
DR: Allen Zhao 10/16'18							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED, AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		Q'TY		SCALE	SHEET	REV.	
				N/A	2/5	D	


SOLIDWORK GENERATED DRAWING,DON'T CHANGE BY HAND

REV.	ECN. NO.	APPD.



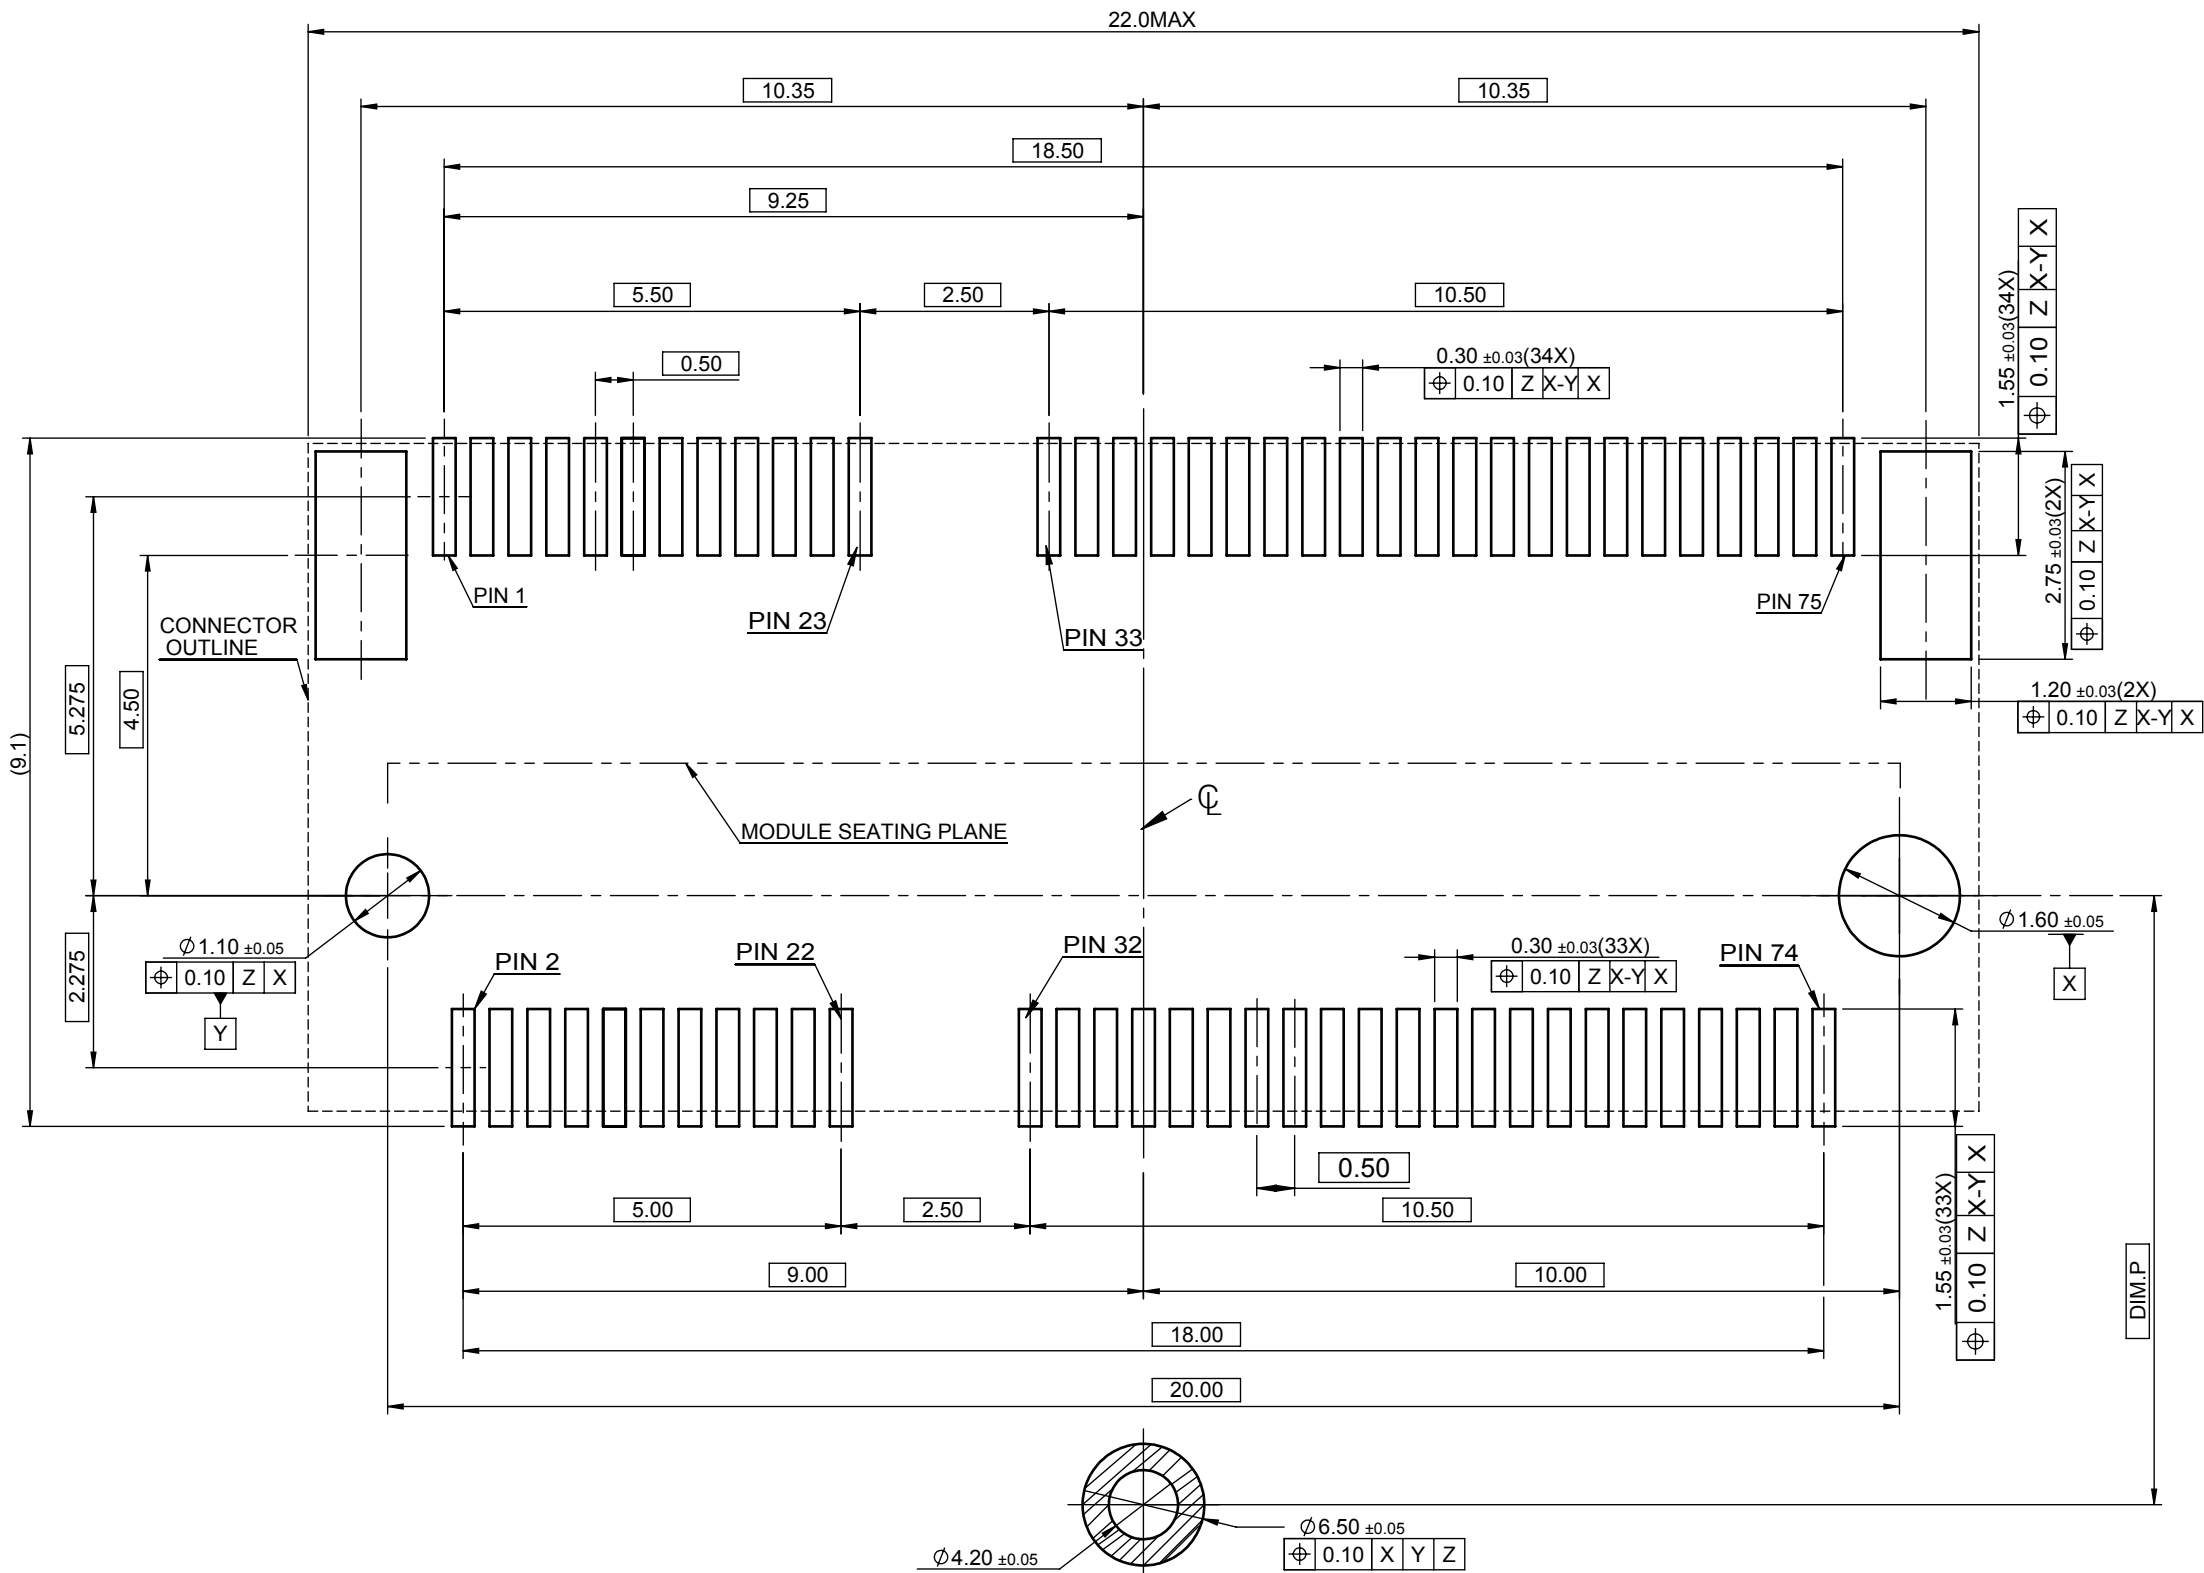


DATUM Z IS THE PCB SOLDER SURFACE


22110	108.25
2280	78.25
2260	58.25
2242	40.25
2230	28.25
3042	40.25
3030	28.25
TYPE	DIM.P


X. ± 0.15	X. ° ±	UNITS mm	NAME(INTENDED USE)		FOXCONN®				
.X ± 0.10	.X ° ±		MAT'L	M.2(NGFF) CONNECTOR(KEYE)		FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			
.XX ± 0.05	.XX ° ±			PART NO.(INTENDED USE)	AS0BC2*-S40BE-*H		CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL		
.XXX ±	.XXX ° ±	FINISH			APPD: Davy Bu		TITLE: CUSTOMER DRAWING		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED, AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			Q'TY		CHKD: Jack Lee		DWG NO.: 317-0000-2478		
				DR: Allen Zhao 10/16'18			SCALE	SHEET	REV.
				N/A	3/5		D		

REV.	ECN. NO.	APPD.

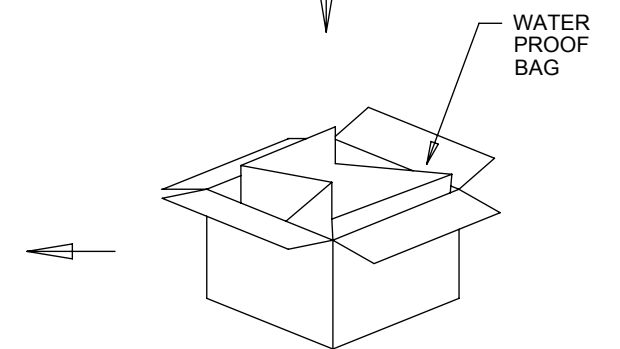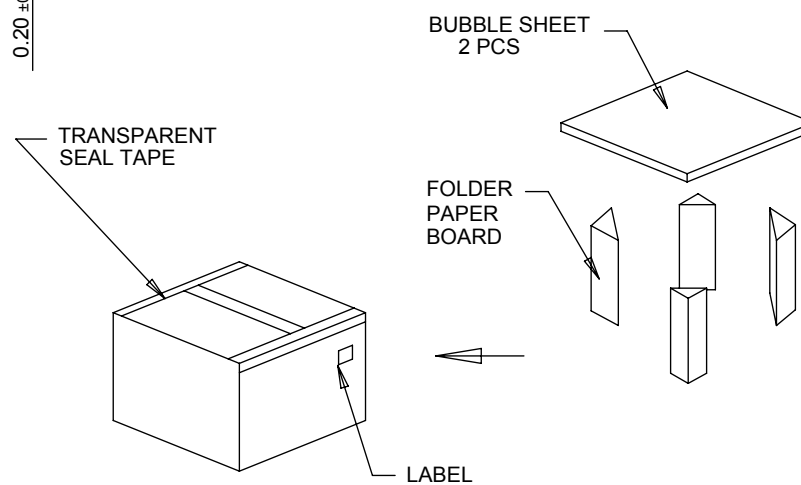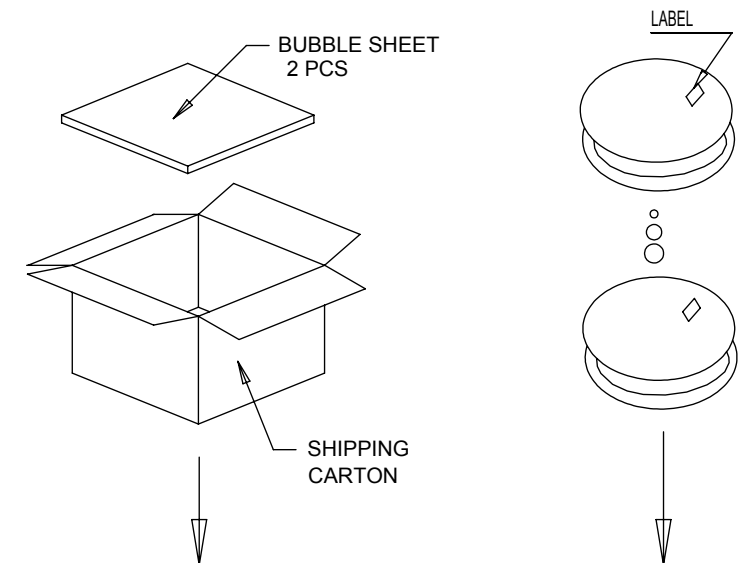

1. COVER TAPE PEELING STRENGTH : 0.01 kgf MIN & 0.13 kgf MAX. AT 300mm/min.
2. 10 POCKETS HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.20\text{mm}$.

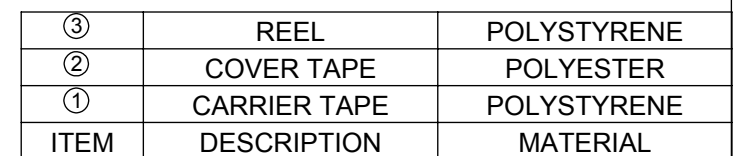


X. ± 0.30		X°. ±		UNITS mm	NAME(INTENDED USE) M.2(NGFF) CONNECTOR(KEYE)		FOXCONN®								
X± 0.25		X°±					FOXCONN INTERCONNECT TECHNOLOGY LIMITED.								
.XX ± 0.15		.XX° ±		MAT'L	PART NO.(INTENDED USE) AS0BC2*-S40BE-*H		CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL								
.XXX±		.XXX° ±					TITLE: CUSTOMER DRAWING								
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				FINISH	APPD: Davy Bu		DWG NO.: 317-0000-2478								
					CHKD: Jack Lee		 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>N/A</td><td>4/5</td><td>D</td></tr></table>				SCALE	SHEET	REV.	N/A	4/5
				SCALE	SHEET	REV.									
N/A	4/5	D													
				Q'TY	DR: Allen Zhao 10/16'18										


AS0BC2*-S40BE-7H	940	7	6580
P/N	PCS/REEL	REEL/BOX	PCS/BOX

SOLIDWORK GENERATED DRAWING,DON'T CHANGE BY HAND


REV.	ECN. NO.	APPD.

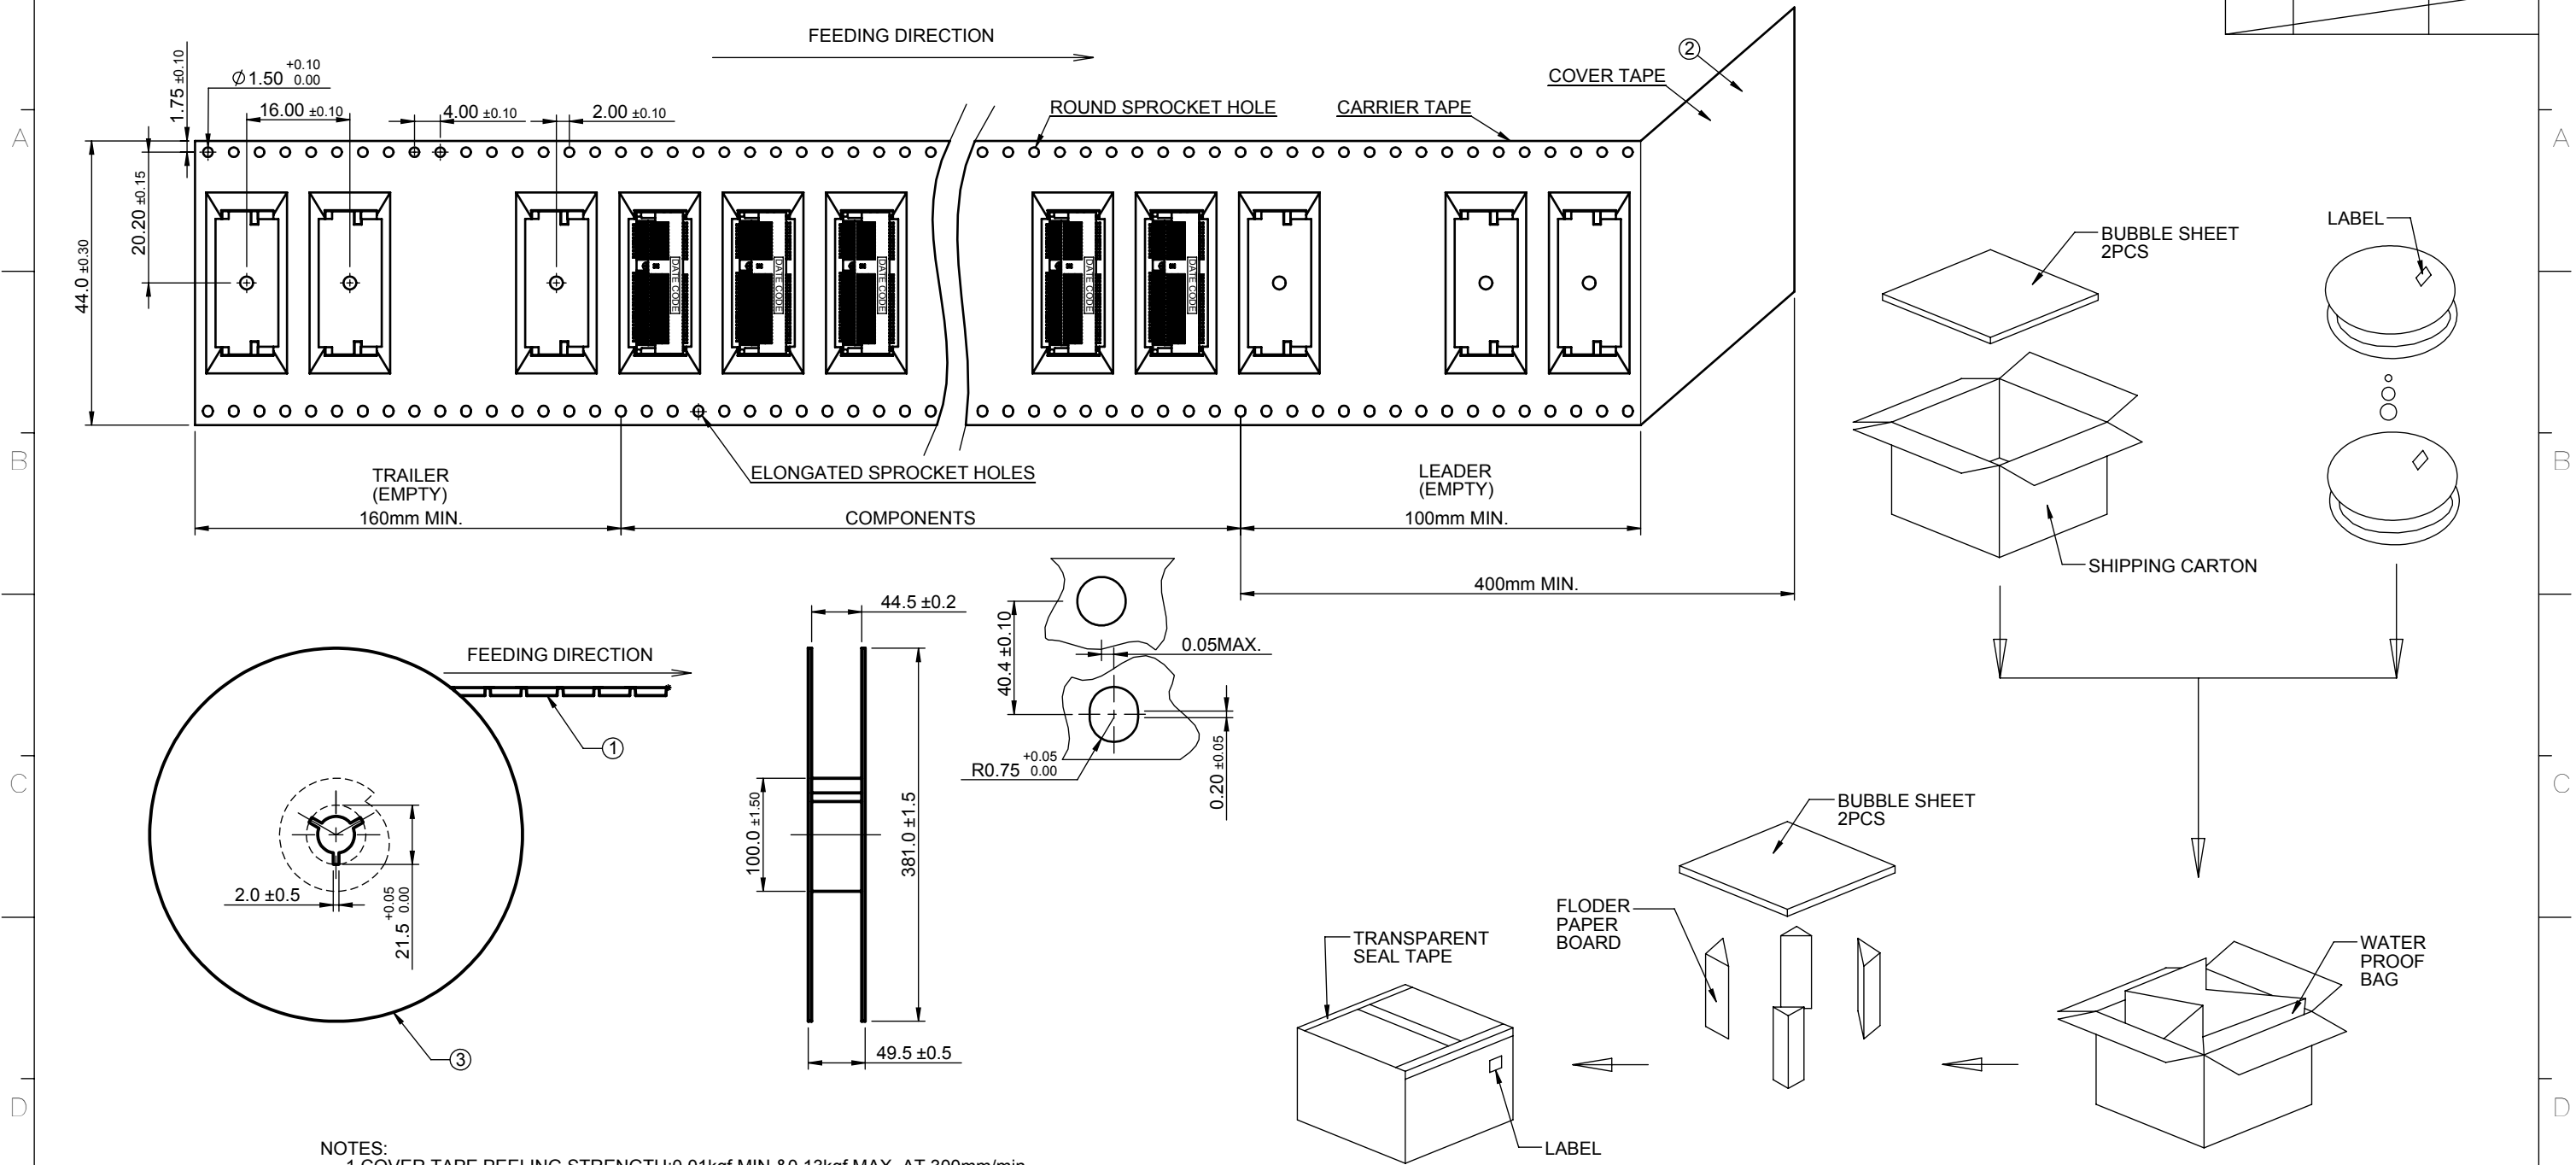

NOTES:
1.COVER TAPE PEELING STRENGTH:0.01kgf MIN.&0.13kgf MAX. AT 300mm/min.
2.10 POCKETS HOLE PITCH CUMULATIVE TOLERANCE ±0.20mm.

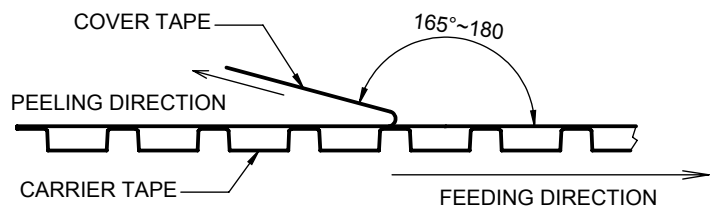

AS0BC2*-S40BE-LH	940	5	4700
P/N	PCS/REEL	REEL/BOX	PCS/BOX

X. ± 0.30	X. ° ±	UNITS mm	NAME(INTENDED USE)	FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				
.X ± 0.25	.X ° ±	MAT'L	M.2(NGFF) CONNECTOR(KEYE)	CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL				
.XX ± 0.15	.XX ° ±		FINISH	PART NO.(INTENDED USE) AS0BC2*-S40BE-*H	TITLE: CUSTOMER DRAWING			
.XXX ±	.XXX ° ±	Q'TY		APPD: Davy Bu	DWG NO.: 317-0000-2478			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED, AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			CHKD: Jack Lee		SCALE	SHEET	REV.	
			DR: Allen Zhao 10/16'18		N/A	5/5	D	