A Quantitative Analysis of Warnings in Linux Draft: Friday 28th August, 2015 13:27

Elvis Flesborg efle@itu.dk

September 1st 2015 IT University of Copenhagen

Contents

1	Introduction	1		
2	Background 2.1 Variability 2.1.1 Feature Models 2.2 The Linux Kernel 2.3 Linux Kernel Development 2.4 Inner Workings of Linux Kernel 2.4.1 Subsystems 2.4.2 The KCONFIG language 2.4.3 Configuring Linux 2.4.4 Compiling and Catching Warnings 2.4.5 Gcc Warnings	2 2 2 3 3 4 4 4 4 5 6 7		
3	Methodology 3.1 Experimental Setup 3.2 Part 1: Choosing the Configurator 3.2.1 Compiling and Collecting Data 3.3 Analyzing Data	11 12 13 13		
4	Results 4.1 Stable Linux Version	14 14 14 15		
5	Threats to Validity 5.1 External Validity 5.1.1 Generalization 5.1.2 The Built-In randconfig Configurator 5.2 Internal Validity 5.2.1 9 Different In-Development Versions 5.2.2 More Features in the In-Development version 5.2.3 Gcc versions 5.2.4 Firmware	17 17 17 18 18 18 18		
6	Related Work	2 0		
7	Conclusion 2			
8	Appendices 8.1 KCONFIG language	23 23 24		



—Leave blank until the end—

Introduction

Software projects with a high variability rate can be configured, to suit many needs with the same code base. Possibly the largest open source project, which also happens to be the project with the highest variability rate is the Linux kernel. It contains approximately 10,000 different configuration options.

The basis for this paper is another paper: 42 Variability Bugs in the Linux Kernel: A Qualitative Analysis [2], where bugs in the Linux kernel are qualitatively analyzed. In this report, warnings will be analysed quantitatively, and will function as a proxy for bugs.

The following contributions will be made: Analysis of distributions of warnings in the Linux kernel, comparisson of warnings in a stable version of the Linux kernel vs. an in-development version. Also an analysis of where the warnings are located.

Background

A Linux operating system is often referring to a GNU/Linux operating system, where the Linux part of GNU/Linux is the Linux kernel, and the GNU part is a software bundle with utilities (eg. a shell, a compiler, etc...) [9]. Both is needed, to have a working operating system. This report will only focus on the $Linux\ kernel$, and not the GNU bundle.

2.1 Variability

Many software products are configurable in some way. This creates the possibility of tailoring the software to suit different needs. For example different kinds of hardware, or different functionalities.

This is called *variability* in software, and a software product of this type is called a *Software Product Line* (SPL). software products with different functionalities can be derived from the same source code base, and the code in its entirety is not a valid product [5, p. 1].

Software with a high-degree of variability is usually referred to as *Variability-Intensive Systems* or *VISs*. Linux is a *VIS* with more than 14,000 different configuration option, called *features*¹. Other examples of VISs are BusyBox, Eclipse, Amazon Elastic Compute Service, and Drupal Content Management Framework [11, p. 1] to name a few.

2.1.1 Feature Models

A feature model is a way of representing all the possible configurations - the configuration space. It contains all the features with their respective options and all the constraints and dependencies between the features.

A visualization of a feature model is called a feature diagram, there is an example in Figure 2.1. The example will be tiny compared to that of the Linux kernel. With many thousands of features, the feature model of the Linux kernel is too big to fit on a normal sized paper.

Figure 2.1 depicts a feature model of a phone configuration, where there are some mandatory features: Screen and Calls, and some optional: GPS and Media, with 2 optional features Camera and MP3 depending on Media.

There is also some choice options **Color**, **BW**, and **High Definition** for the screen type, where only one of them may be enabled. A cross-tree constraint is also present, which states that **Media** with all of its children can only be enabled if a **High Definition** screen is enabled.

The feature diagram is inspired by [3], but there is no consensus on a unified notation for attributes in feature models [3].

¹14,387 across all architectures, with an average of 9,984 per architecture, and 10,335 for the x86/ architecture

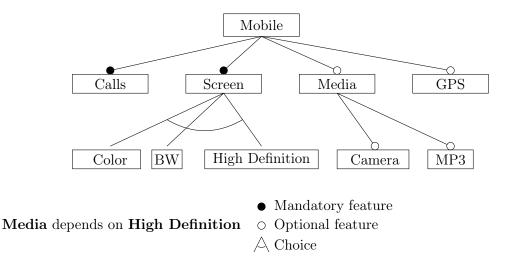


Figure 2.1: A feature diagram of a phone

The feature diagrams of VISs are typically wide and shallow. The Linux kernel feature model hierarchy, for example, is only 8 layers deep [4, p. 17].

2.2 The Linux Kernel

The Linux kernel is written in by many thousand of people all over the world, and has been ported to more than 20 architectures², which makes it very scalable, it is the operating system that supports the most hardware in the world [1,7].

Its use case ranges from small embedded devices like mobile phones, GPSs to supercomputers. In fact 98% of the top 500 supercomputers in the world run a Linux distribution [10].

It was first developed in 1991 by *Linus Torvalds*, and has since been growing. Today the code base is 19 million lines of code.

2.3 Linux Kernel Development

The Linux kernel development model is unique in the way, that it is developmed by many thousands of people all over the world. There is a hierarchy of people, who are head-maintainers of different parts of the kernel³.

Stable Releases

The Linux kernel development cycle has approximately $2^3/4$ months from one stable release to the next stable release [6]. In the meantime, weekly semi-stable versions are released.

When the top maintainers of the mainline tree think that enough bugs have been fixed, a new stable version is created, and the whole process is repeated.

In-development Releases

During development, new code is added to the development version of Linux, which is called *linux-next*. This has been the main in-development version since 2008⁴.

²See the README file in the Linux kernel tree

 $^{^3}$ See the MAINTAINERS file in the root folder of the Linux kernel

⁴See the original post about it here: https://lkml.org/lkml/2008/2/11/512

The *linux-next* tree is a GIT repository, which merges over 200 other GIT repositories [8], which are all based on the *mainline* tree. The *linux-next* tree is merging these other trees and the merge conflicts are handled every day.

This thesis project uses both the *linux-next* tree and the latest stable version. They will be referred to as the **in-development** version, and the **stable** version. As time of experiment execution, the latest stable version is 4.1.1.

2.4 Inner Workings of Linux Kernel

This section will explain, the structure of the Linux kernel, from the directory structure, over configuration, to compilation of the kernel.

2.4.1 Subsystems

The directories in the root folder of the Linux kernel source code are called *subsystems*, and they contain code for different purposes. Some are large crucial subsystems, some are smaller, and some are infrastructure subsystems, which contain scripts and tools for various uses [2].

The drivers/ subsystem is by far the largest subsystem (with 57% of the total lines of code). It contains all device drivers. It is also mostly contributed to by hardware vendors.

The arch/subsystem (18%) contains architecture specific source code. There are 29 folders in the arch/subsystem. One for each major architecture that is supported. To highlight a few, the x86 architecture is used for most common personal computers, the arm architecture is used mostly for mobile devices, and the powerpc architecture has been used for video game consoles. In this project, only the x86 architecture will be used.

The fs/ subsystem (6%) is code regarding filesystems, the net/ subsystem (5%) is about networking, and the mm/ subsystem (.6%) is about memory management. Then there are sound/(5%), include/(4%), kernel/(1%), crypto/(.4%), security/(.4%),

Other smaller subsystems are: virt/, ipc/, init/, usr/, and lib/.

and block/ (.2%).

And infrastructure subsystems are: tools/, scripts/, and samples/.

2.4.2 The KCONFIG language

KCONFIG is the language of the feature model in Linux (also used for other projects like BUSY-BOX, BUILDROOT, COREBOOT, FREETZ and others) [4, p. 4].

The feature model files have the prefix Kconfig, and are scattered all over the Linux kernel source code tree, where they include each other. There are 1195 Kconfig files in total in the Linux kernel⁵ with 956 of them relevant for the x86 architecture.

The corresponding KCONFIG code for the phone example can be seen in Figure 2.2. For a description of the context free grammar of the KCONFIG language, see the Appendix 8.1.

 $^{^5\}mathrm{Found}$ with the command find . | grep Kconfig | wc

When a configuration file is generated, it is saved as .config. In this file, all features are prefixed with CONFIG_, and this is the configuration of the Linux kernel. More on the configuration files in Section 2.4.3.

The different data types in the Kconfig language are boolean (35%), tristate (61%), string (0.41%), hex (0.32%), and integer (3.7%). tristate is a datatype with three possible values: y,n, and m, where m will set the feature as a module instead of building it into the kernel. It can then be loaded into the kernel when installing and running the kernel.

This does not mean that **m** and **n** will be the same in this project.

The percentages are of the 10,335 features available for the x86 architecture.

```
config CALLS
           def_bool y
2
      config SCREEN
3
4
           def_bool y
5
      choice
           prompt "Choose screen type"
           default HD
           depends on SCREEN
9
           config COLOR
               bool "Color screen"
11
           config BW
12
               bool "Black and white screen"
13
           config HD
14
               bool "High Definition screen"
15
       endchoice
16
17
      config GPS
18
           bool "GPS location system"
19
      config MEDIA
20
           bool "Media modules"
21
           depends on HD
22
23
      if MEDIA
24
           config CAMERA
25
               bool "Camera support"
26
           config MP3
27
               bool "MP3 support"
28
29
      endif
```

Figure 2.2: KCONFIG code for the phone example

2.4.3 Configuring Linux

The Linux kernel comes with different ways of choosing features - these are called *configurators*. Some of them lets the user choose the features. There is a question based one: config, and some menu based ones: menuconfig, xconfig, nconfig, and gconfig.

Figure 2.3 shows what the graphical configurators menuconfig and xconfig look like.

Other configurators will never prompt the user for anything, but create a configuration automatically:

- allyesconfig (enabling as much as possible)
- allnoconfig (disabling as much as possible)
- tinyconfig (same as all no config but with higher compression rate, to fit on smaller devices.

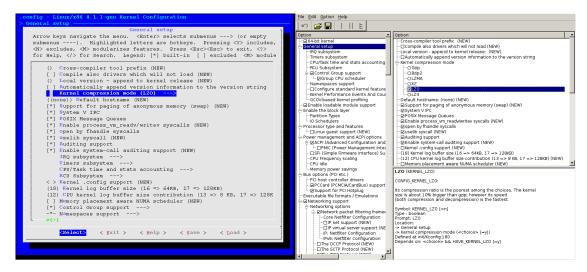


Figure 2.3: menuconfig and xconfig

- defconfig (choosing the default values for everything)
- randconfig (choosing random values for everything).

Running the configurator allnoconfig on the KCONFIG code for the phone example. in Figure 2.2, will disable all the features in the feature model that can be disabled. Figure 2.4(a) shows the .config file that will be generated when running allnoconfig.

The CALLS and SCREEN are mandatory, and will therefore be enabled. Out of the three possibilities in the choice clause, the HD feature has been enabled, since it is the default choice.

```
1 CONFIG_CALLS=y
1 CONFIG_CALLS=y
                                2 CONFIG_SCREEN=y
2 CONFIG_SCREEN=y
                                3 # CONFIG_COLOR is not set
3 # CONFIG_COLOR is not set
                                4 # CONFIG_BW is not set
4 # CONFIG_BW is not set
                                5 CONFIG_HD=y
5 CONFIG_HD=y
                                6 CONFIG_GPS=y
6 # CONFIG_GPS is not set
                                7 CONFIG_MEDIA=y
7 # CONFIG_MEDIA is not set
                                8 CONFIG_CAMERA=y
         (a) all no config
                                9 CONFIG_MP3=y
                                         (b) allyesconfig
```

Figure 2.4

Figure 2.4(b) shows the .config file that is generated by the configurator allyesconfig. Every feature has been enabled, except COLOR and BW, which must be disabled within the choice clause for the default HD feature to be enabled.

Running allnoconfig on the Linux kernel, will enable 228 features and allyesconfig will enable 6976 features.

2.4.4 Compiling and Catching Warnings

When the Linux kernel has been configured, it is ready to be compiled to create the executable kernel. The compiler will then only include the code parts, which are indicated by the configuration file. This is written in the source code as #ifdef CONFIG_FOO.

When writing code for variability software, a programmer has to be aware of the #ifdef clauses, and that different configurations can exist, which will only enable some of the code. A program-

mer can fail to check all possible configurations when writing the code, and accidentally make coding mistakes.

When compiling the Linux kernel, the command make all is run, and this will start the compilation. If any warnings or errors happen, they will be posted in the standard output in the terminal.

In a warning output, there is information about a possible coding mistake that might break the code. There are 100s of different warning types, that can be enabled. 30 of the these can be enabled by giving the -Wall flag to the compiler This will enable warnings about contructions that some users consider questionable GCC [13].

Some of the warnings are more severe than others, that will be commented on in the next section about the GCC warnings.

2.4.5 Gcc Warnings

All experiments are run with the GCC-flag -Wall, which is a group of 33 warnings. In many cases, though, the Linux kernel enables even more warning flags, so it is not expected to only get warnings from the -Wall group.

The warnings will be categorized into these types of warnings:

1. Wrong value warnings

These warnings will have a chance of breaking the code by returning a wrong value or doing wrong logic.

2. Code pollution warnings

These warnings will not break the code, or return wrong values, merely by unused code. This plays a role in fitting the Linux kernel on devices with space limitations (such as embedded devices).

3. Bad code practice warnings

These warnings are deemed unsevere. This does not mean, that they can not be severe in other projects, it is usually a heads up to the programmer, that some bad practices have been used.

Here follows a list of the different warning types that was found during the experiment. They are ordered alphabetically, and when code snippets from the Linux kernel are present, they are simplified.

array-bounds

This warning is given, when GCC is certain that a subscript to an array is always out of bounds. This will be categorized as a *wrong value* warning.

cpp

This shows #warning directives written in the code. This is a warning message that the coder can pass to the compilee. Often they will not result in an error, but inform about specifics. This is categorized as *irrelevant*.

deprecated-declarations

This will show a warning when a function is used, which a programmer has declared deprecated. This typically means that a function is run, which is old and has been replaced - or has not yet been replaced - by another function.

This is categorized as a wrong value warning.

discarded-array-qualifiers

error=

This is a prefix, which can be put in front of all warning types. It will treat the warning as an error, because the developers do not want a specific warning to happen without the compilation stopping.

This is an error, and will *not* be categorized.

frame-larger-than=

implicit-function-declaration

This is given, when a a function has not been declared, but is being used.

This is categorized as bad code practice.

incompatible-pointer-types

This shows when there is converted between pointers, which have incompatible types.

This is categorized as a wrong value warning.

int-conversion

This warns about incompatible conversions between integers and pointers.

This is categorized as wrong value.

int-to-pointer-cast

This warns about an integer being cast to a pointer with a different size.

This will be categorized as wrong value.

logical-not-parentheses

This warning occurs when the left hand side of an expression contains a *logical not* (a ! in C). An example is if (!ret == template[i].fail) from the file crypto/testmgr.c.

The statement can be interpreted in these 2 ways, which do not necessarily mean the same in all cases:

```
• ! (ret == template[i].fail)
```

• (!ret) == template[i].fail

This is categorized as wrong value.

maybe-uninitialized

is when there is an uncertainty about a variable being uninitialized. In the case in Figure 2.5 there is a switch-case where the variable sgn is not initialized in all of the cases.

If GCC cannot see for sure that the variable is initialized, it will return this warning.

This is categorized as wrong value.

```
1 static int __add_delayed_refs()
2 {
      int sgn;
      switch (node->action) {
      case BTRFS_ADD_DELAYED_REF:
          sgn = 1;
          break:
      case BTRFS_DROP_DELAYED_REF:
9
          sgn = -1;
10
          break;
11
      default:
12
          BUG_ON(1);
14
      *total_refs += (node->ref_mod * sgn);
15
16 }
```

Figure 2.5: A real example of maybe-uninitialized function

overflow

This is when an integer is truncated into an unsigned type. This can lead to wrong data, and is categorized as a *wrong value* warning.

pointer-to-int-cast

This warns about a pointer being cast to an integer with a different size.

This will be categorized as wrong value.

return-type

This will be shown when there is a non-void function, which has no return statement.

This is categorized as an bad code practice warning.

switch-bool

This warning is shown when a boolean is used in a switch statement. When dealing with a boolean, an if statement should suffice, and this warning might indicate that the wrong variable is used.

This is categorized as wrong value.

uninitialized

This warns about uninitialized variables. The variable has been declared, but has not yet been given a value.

This is categorized as a wrong value warning.

unused-function

This is a warning about a function, which has been declared and initialized, but has never been called.

This is categorized as *code pollution*.

In the example in Figure 2.6, the function bq27x00_powersupply_unregister will only be called if the feature CONFIG_BATTERY_BQ27X00_I2C is enabled, and is therefore an unused function.

```
1 static void bq27x00_powersupply_unregister(struct bq27x00_device_info *di) {
      poll_interval = 0;
      cancel_delayed_work_sync(&di->work);
3
      power_supply_unregister(di->bat);
      mutex_destroy(&di->lock);
6 }
8 #ifdef CONFIG_BATTERY_BQ27X00_I2C
10 static int bq27x00_battery_remove(struct i2c_client *client) {
      struct bq27x00_device_info *di = i2c_get_clientdata(client);
11
12
      bq27x00_powersupply_unregister(di);
13
      return 0;
14 }
16 #endif
```

Figure 2.6: A real example of an unused function - from the file drivers/power/bq27x00_battery.c

unused-variable

This is the same as unused-function, but only with a variable instead of a function. There will be no example of this.

It is also categorized as code pollution.

unused-label

This is the same as the unused-function and unused-variable warnings with a label instead. This is categorized as *code pollution*.

Methodology

Objective: This report aims to make a quantitative analysis of warnings in all of the Linux kernel by checking randomly generated Linux kernels for warnings and generalize. This includes addressing the following research questions:

RQ1: What warnings are the most common in the stable Linux kernel?

RQ2: Where do most warnings occur?

RQ3: Are there any signifiant differences between an in-development version of Linux and a stable version?

Subject: To respond to these questions there will be generated random configurations, and these will be used to compile two different versions of the Linux kernel, the latest stable Linux kernel version, and a two months old in-development version of the Linux kernel.

The warning messages will be categorized and collected, and be subject for analysis.

Methodology: The methodology will be in three parts. First part is finding a way of generating random configurations in a representative way. Second part is collecting any warnings that a compilation might return. Third part is analyzing the data and answering the research questions.

For the configurations to be representative every configuration must be equally likely as others in the configuration space. But Since there are more than 10,000 different features in the feature model of the Linux kernel, there will be approximately $2^{10,000}$ (10^{3080}) possible configurations in the configuration space, assuming the feature model is 100% booleans and there are no crossconstraints. This is more than the estimated number of atoms in the universe, so getting a list of all the possible configurations is not possible (at least not with today's computers).

3.1 Experimental Setup

The experimental setup consists of a loop, where a configuration is generated, the Linux kernel is then compiling with this configuration, and the output warnings are categorized and collected.

The experiment has mainly been carried out on a computer at the IT University of Copenhagen. The computer has $32 \times 2.8 MHz$ and 128 GB of RAM, and the average time to compile a kernel and upload the data was around 1 minute and 35 seconds. Also a conventional laptop with $4 \times 2.5 MHz$ and 8 GB of RAM has been used.

To say something about all of the Linux kernel, the generated configurations for the experiment should be a representative sample of all the possible configurations.

3.2 Part 1: Choosing the Configurator

BLABLA about representativeness

In Figure 3.1 a blue area represents the whole configuration space, and red dots inside a blue area represent a subset of all the configurations, which is in a given sample.

Figure 3.1(a) shows a sample, which is representatively distributed over the configuration space.

Figure 3.1(b) shows a sample, which is not representatively distributed. All the dots tend to cluster together around certain areas of the configuration space, and if one was to tell what the configuration space looked like by only looking at the sample, it would look like the yellow area.

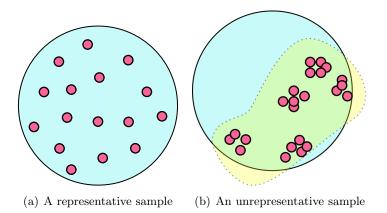


Figure 3.1: Showing both representative (a) and unrepresentative (b) samples

Five different methods are proposed and discussed to generate random configurations.

1. Using randconfig

Using the built-in randconfig configurator.

This comes out of the box with Linux, and always generates valid configurations, and does so in a few seconds. A caveat is that it does not generate the configurations representatively. Read section 5.1.2 about how randconfig is not representative.

2. Changing randconfig

This method will rewrite the code for randconfig or create a new configurator (eg. reprandconfig). This configurator must not have the bias for features in the upper levels of the dependency tree, as randconfig has.

This would require good knowledge of programming in the C language and also an algorithmic way of estimating the number of features in all the subtrees.

3. Permuting KCONFIG

This proposal will desugarize the KCONFIG files to be in one level only, by replacing if FOO ... endif clauses by depends on options in the features clauses, and then randomly scramble the position of the feature clauses in the files. After this, randconfig is run.

The hope is that the randconfig script loads the KCONFIG files from top to bottom, and will then load in the features at random each time.

4. Generate and filter

In this method, a configuration file is generated with a script, which does not know the relation between all the features. It knows all the feature names, and the possible values for the features, and is aware of the choice clauses.

It goes through the list and randomly selects values for all the features. Then all invalid configurations are filtered away.

5. RandomSAT

The Linux kernel feature model can be extracted from the KCONFIG files, to get a propositional formula [12]. This formula can be used to check for propositional satisfiability.

Out of these five methods, randconfig is selected as a proxy for getting a representative sample.

3.2.1 Compiling and Collecting Data

When a configuration has been generated, the Linux kernel is compiled using that configuration file by running the command make all. This command runs GNU MAKE, which is instructed how to compile the kernel with GCC.

The warning and error outputs from GCC will be saved for analysis.

A warning output will contain a *bug type*, a *filename*, *line number*, and a *message* describing the warning in english.

— blabla about how to categorize —

3.3 Analyzing Data

The warnings will be quantitatively analyzed. The analysis of the warnings is purely quantitative, and this report will not contain any in-depth analysis of any of the warnings in comparisson to [2], which is a qualitative analysis of bugs in Linux.

The different warning types will be categorized according to section 2.4.5.

Results

A total of 42,060 experiments were run. Half of them from the in-development Linux version, and the other half of the latest stable version of Linux.

Also 506,000 bugs were found and 4,600,000 files.

4.1 Stable Linux Version

In Figure 4.1 is shown the distribution of warnings in the experiments run with the stable Linux kernel. The distinct warning types are only counted once per experiment run.

The ones that causes errors are marked with red background.

A total of 245,000 warnings were collected from these experiments, with the highest amount of warnings for a single experiment being 111. Many of the warnings found, are the same exact warnings, happening in the same files over and over, which is natural since many different experiments are bound to create some of the same warnings.

It is the same code base, so...

17% of the compilations stopped with an error. These errors were mostly errors, which were specific for the build machine because of missing libraries or programs, and will not be looked into. The compilations that had errors were made to stop after the first error was found to not have data pollution caused by an avalanche effect.

The following observations have been made:

Observation 1: The most common warnings in the *severe* categorization is: *maybe-uninitialized*, *logical-not-parentheses*, and *uninitialized*.

Observation 2: The warnings unused-function and unused-variable are among the top 4 of all warnings.

With these observations, **RQ1** can be answered.

Conclusion 1:

4.2 Subsystems

Figure 4.2 shows the distribution of subsystems with warnings in all of the compilations on the stable Linux version.

In many compilation runs, there were multiple warnings, in the same subsystems. they are only counted once.

Warning	Percentage	Category
unused-function	59.%	Code pollution
maybe-uninitialized	45.%	Severe
logical-not-parentheses	30.%	Severe
unused-variable	29.%	Code pollution
cpp	24.%	Unsevere
uninitialized	19.%	Severe
ERROR	17.%	-
pointer-to-int-cast	17.%	Severe
discarded-array-qualifiers	17.%	XXX
switch-bool	15.%	Severe
${\it frame-larger-than} =$	14.%	XXX
array-bounds	11.%	Severe
return-type	7.7%	XXX
int-to-pointer-cast	7.6%	Severe
overflow	6.5%	Severe
unused-label	5.4%	Code Pollution
deprecated-declarations	5.4%	Severe
error=implicit-function-declaration	4.6%	-
int-conversion	2.7%	Unsevere
implicit-function-declaration	1.0%	Unsevere
incompatible-pointer-types	0.74%	Unsevere
error=implicit-int	0.029%	-

Figure 4.1: Distribution of warnings in the stable kernel

The greyed out rows are for subsystems that are not a major part of the kernel functionality. This is inspired by [2]. See section 2.4.1.

With these results, the following observations can be made:

Observation 3: In 93% of the experiments, the drivers/ subsystem was present in a warning.

Observation 4: There are near zero warnings in the **security**/ subsystem. This can both be an indication of a small subsystem, but rather, that it is an important subsystem, which a lot of work are put into.

4.3 In-Development Version vs. Stable Version

The results show some differences, and the following observations can be made.

— table with comparisson —

Subsystem	Percentage		
drivers/	93.%		
include/	55.%		
fs/	35.%		
$\operatorname{arch}/$	35.%		
$\operatorname{arch/x86/}$	35.%		
kernel/	24.%		
$\mathrm{net}/$	18.%		
$\operatorname{crypto}/$	17.%		
$\operatorname{sound}/$	16.%		
$\mathrm{mm}/$	14.%		
usr/	12.%		
samples/	12.%		
lib/	11.%		
$\mathrm{block}/$	8.5%		
scripts/	1.8%		
security/	0.091%		
ipc/	0.0048%		
init/	0.0048%		
tools/	0.0048%		
virt/	0.0%		

Figure 4.2: Distribution of all subsystems within the warnings

Threats to Validity

5.1 External Validity

5.1.1 Generalization

All the selected configurations are not a representative subset of all possible configurations, and therefore does not fully represent all of the Linux kernel. The method by which the configurations are selected, does not select configurations between the whole configuration space equally.

There is a bias towards selecting configurations that will not visit the deepest layers of the

There is a bias towards selecting configurations that will not visit the deepest layers of the dependency tree.

5.1.2 The Built-In randconfig Configurator

Unfortunately, the built-in randconfig is not representative, but is biased towards features higher up in the feature model tree. See Section 5 about Threats to Validity for more information about how randconfig is biased.

So, for the sample to be representative, another way to generate configurations must be found.

Figure 5.1 shows a toy example of a KCONFIG feature model written in the KCONFIG language. It is a very small example with only two features, but it will easily explain some limitations of using randconfig.

There are two features (A and B) in the example, which can be enabled or disabled, and feature B depends on A being enabled. This leaves three possible outcomes.

One where both is enabled, one where only A is enabled, and one where none of them are enabled. The outcome where only B is enabled is an invalid configuration since B depends on A.

```
1 config A
2 bool
3 config B
4 bool
5 depends on A
```

Figure 5.1: A toy KCONFIG feature model

Figure 5.2(a) shows how randconfig will decide whether the features are enabled or disabled. It always goes from the top of the tree and down. So feature A will always be decided for at first. And since it is a boolean there will be a fifty fifty chance.

Then it proceeds further down in the dependency tree, and decides for feature B, which also has a fifty fifty chance.

For the creation to be representative, all the three possible configurations should have equal chance of being created (33%). See Figure 5.2(b) for a visualization of how the selection should be to be representative.

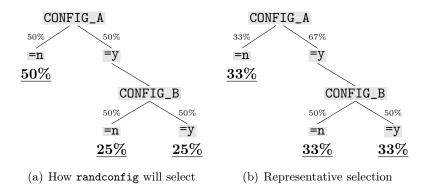


Figure 5.2

Representativeness is not of high prioritization for the Linux kernel developers, the randconfig function is merely used as a simple fuzz testing tool.

This ultimately means that randconfig is not representative in its configuration creation. (See more about representativeness in the section 3.2.)

5.2 Internal Validity

5.2.1 9 Different In-Development Versions

Multiple different in-development versions of the Linux kernel are used to minimize the skewing of warnings. If only one version of the in-development version is used, it gives a very one-sighted view of the in-development versions, where certain bugs may be over-represented. The more different versions of the in-development Linux should be used, to get a more uniform results.

5.2.2 More Features in the In-Development version

In the in-development Linux version, there are 20 more features than in the stable version. The configurations are created in the in-development version, and are copied over to the stable version. This will result in some unknown features being set on the stable version, but there is no code corresponding to the features, so no harm is done.

If they are created in the stable version, instead, they will never be given random values, but always default values, which will skew the results.

5.2.3 Gcc versions

Roughly a third of the compilations were done with GCC version 5.1.0 and two thirds with GCC version 4.9.2. This should not matter on what warnings are returned. There is only one new warning that is enabled by the -Wall flag in version 5.1.0 (-Wc++14compat), and none of this type was found.

There is a possibility though, that GCC has been improved to be better at finding certain warnings, and therefore the newer version will find more warnings that older version.

5.2.4 Firmware

When building certain firmware drivers in Linux, external proprietary drivers are needed, before they can be built. This firmware is not in the kernelcode, but must be downloaded from the hardware vendors homepages.

There are libraries on the internet which contain these firmware drivers, but in this report, they will not be included. These drivers are in a sense not a part of the open source Linux kernel, and are out of scope with this report.

To disable configurations, which would require these proprietary firmware drivers, the following features were given a fixed value in the configurations:

- CONFIG_STANDALONE=y
- CONFIG_FW_LOADER=n
- CONFIG_PREVENT_FIRMWARE_BUILD=y

Also every feature that had some relation to the Z4C library has been disabled, since it was not installed on the build system.

So all features, which were related to the Z4C library were also given a fixed value.

• CONFIG_*LZ4*=n

Furthermore this feature is fixed, since it is also dependent on a library not installed on the build system.

CONFIG_SECCOMP=y

Related Work

Variability bugs The paper 42 Variability Bugs in the Linux Kernel... [?] is looking at bugs in the linux kernel from a qualitative angle rather than quantitative. The bugs are manually analysed, and discussed.

This report is somewhat a continuation of the research in that paper, trying to quantify the warnings part of the bugs.

Conclusion

— Leave empty until the end—

Bibliography

- [1] L. 22TH BIRTHDAY IS COMMEMORATED. http://www.cmswire.com/cms/information-management/linux-22th-birthday-is-commemorated-subtly-by-creator-022244. php, August 2013.
- [2] I. ABAL, C. BRABRAND, AND A. WASOWSKI, 42 variability bugs in the linux kernel: A qualitative analysis. http://www.itu.dk/people/brabrand/42-bugs.pdf.
- [3] D. Benavides, S. Segura, and A. Ruiz-Cortés, Automated analysis of feature models 20 years later: A literature review, University of Seville, (2010).
- [4] T. Berger, S. She, R. Lotufo, A. Wasowski, and K. Czarnecki, Variability modeling in the systems software domain, version 2, University of Waterloo, (2013).
- [5] C. Brabrand, M. Riberio, T. Toledo, J. Winther, and P. Borba, *Intraprocedural dataflow analysis for software product lines*.
- [6] L. KERNEL RELEASE PREDICTION SITE. http://phb-crystal-ball.org.
- [7] G. KROAH-HARTMAN, Google tech talks 2008. https://www.youtube.com/watch?v=L2SED6sewRw.
- [8] LINUX NEXT, merge trees. http://git.kernel.org/cgit/linux/kernel/git/next/linux-next.git/tree/Next/Trees.
- [9] G. PACKAGES. http://www.gnu.org/software/software.html.
- [10] T. . S. SITES. http://top500.org/statistics/list, June 2015.
- [11] A. B. SÁNCHEZ, S. SEGURA, J. A. PAREJO, AND A. RUIZ-CORTÉS, Variability testing in the wild: The drupal case study, xxx, (2015).
- [12] W. University, Linux variability analysis tools. http://gsd.uwaterloo.ca/node/313.
- [13] G. WARNING TYPES. https://gcc.gnu.org/onlinedocs/gcc-5.1.0/gcc/Warning-Options.html#index-Wall-292.

Appendices

8.1 KCONFIG language

Following is the KCONFIG language context free grammar in the *Backus Naur Form* inspired by the Lua documentation¹.

```
stat ::= 'config ' id '\n' options
id ::= characters { characters }
characters ::= [A-Za-z_0-9]
options ::= mandatory optional
types ::= 'bool' | 'boolean' | 'tristate' | 'int' | 'string' | 'hex'
deftypes ::= ( 'def_bool' | 'def_tristate' ) expr
mandatory ::= types [ '"' characters '"' ] [ expr ] |
optional ::= 'depends on ' expr
             'select ' expr
             'help\n' characters
expr ::= id [ '=' characters ]
         expr '&&' expr |
         expr '||' expr |
         '(' expr ')'
         'if 'expr
         'menu' text
         ,y,
         'n,
text ::= characters | symbols
         text text
symbols ::= '/-(),.'
```

¹http://www.lua.org/manual/5.1/manual.html

8.2 Data