


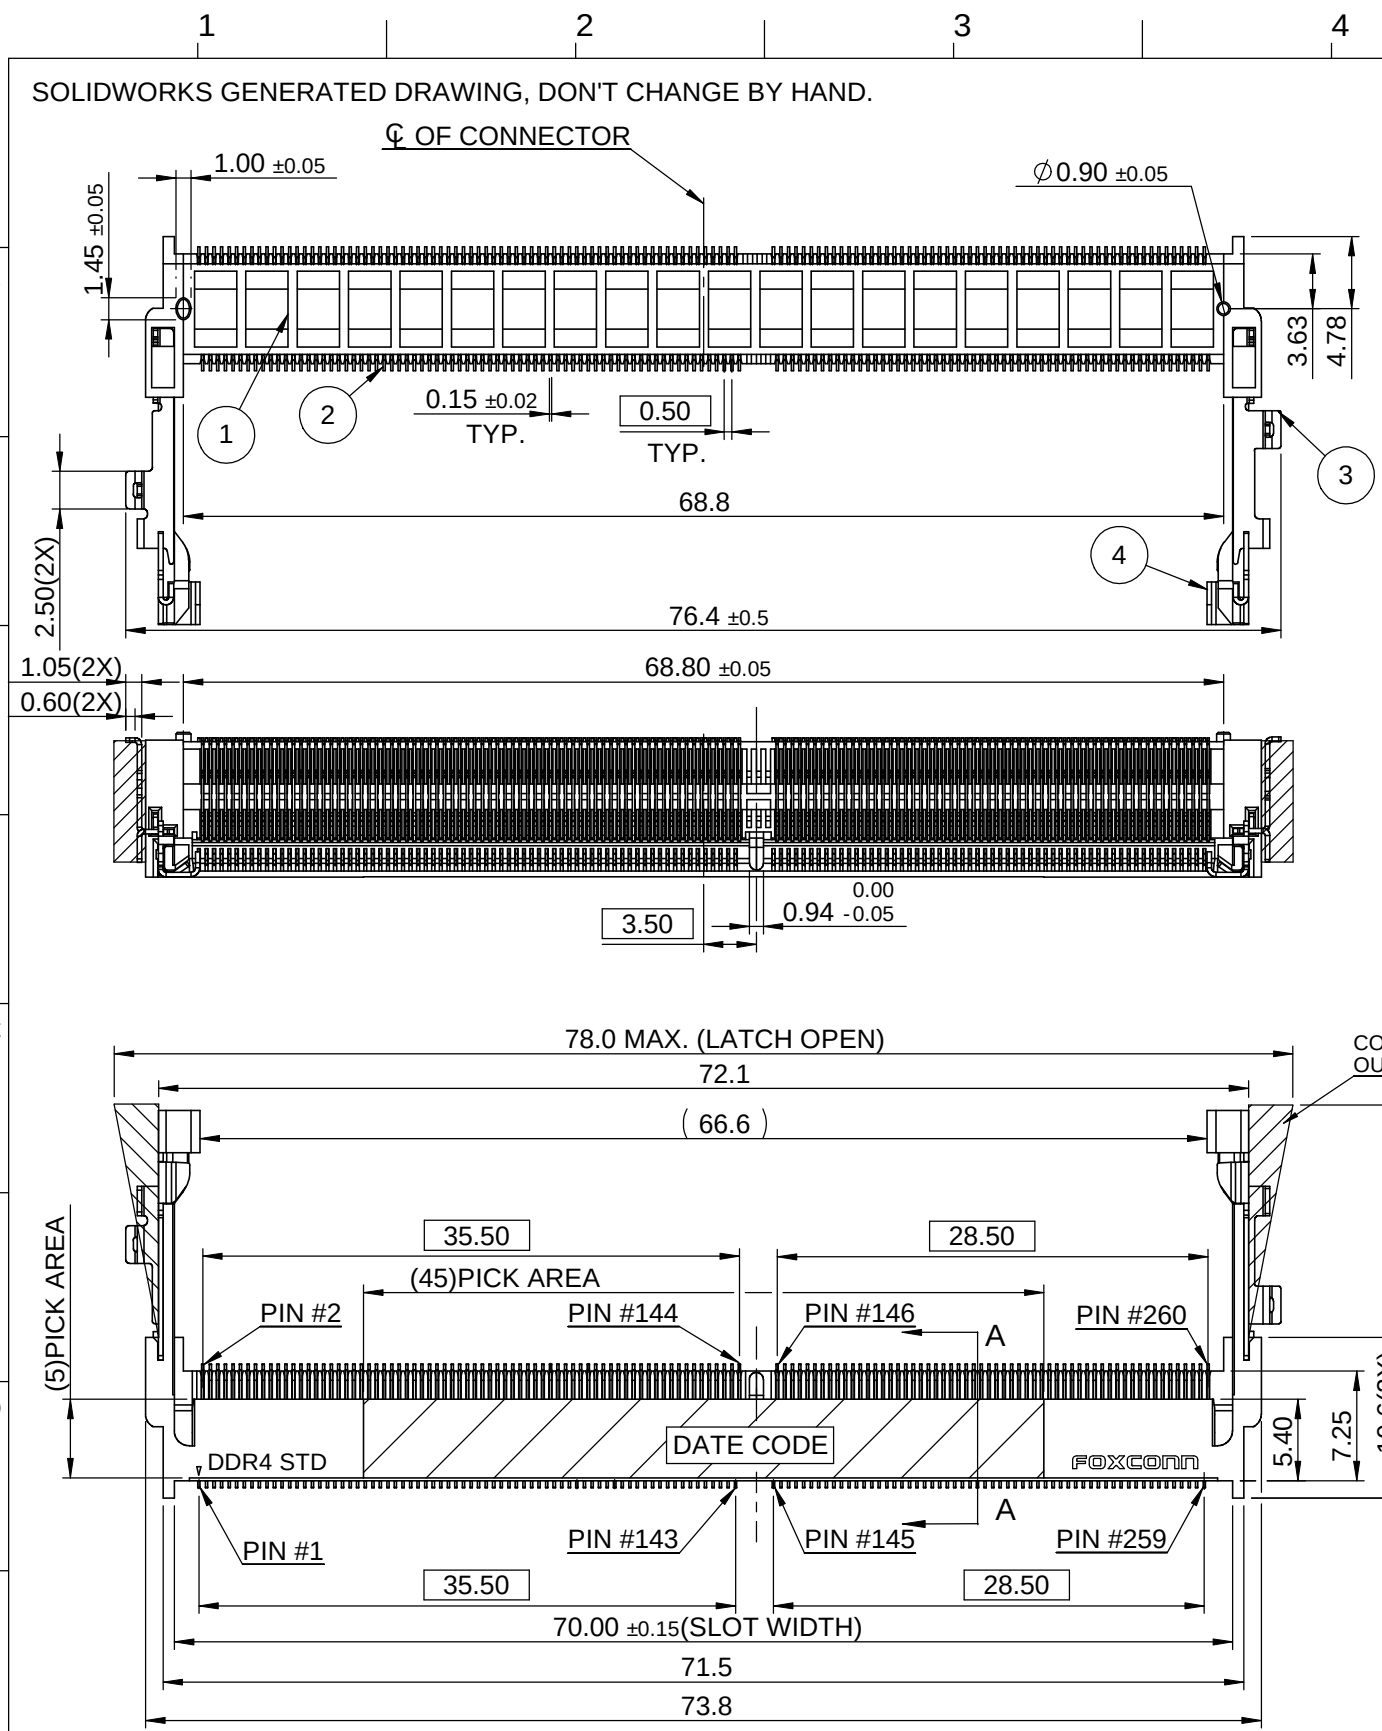


NOTES:
1. ELECTRICAL CHARACTERISTICS:
1.1. CONTACT CURRENT RATING: 0.5 AMPERE MAX. PER PIN.
1.2. VOLTAGE RATING: 25V AC.
1.3. INSULATION RESISTANCE: 100 MEGAOHMS MIN. AT 500V DC.
1.4. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC RMS AT 60Hz, FOR 1 MINUTE.
1.5. CONTACT RESISTANCE: 60 MILLIOHMS MAX. PER PIN INITIAL
Δ10 MILLIOHMS PER PIN AFTER FULL ENVIRONMENTAL TESTING.
2. MECHANICAL CHARACTERISTICS: DURABILITY: 60 MATING CYCLES.
3. OPERATION TEMPERATURE: -55 °C TO +85 °C.
4. RECOMMENDED PROCESS CONDITION: SMT, PEAK TEMPERATURE: 260 °C 10~20S.
5. PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY.

REV.	ECN. NO.	APPD.
A	BC-15-0028579	C.S Li
B	BC-16-0006184	Bruce Wu
C	BC-16-0025261	Bruce Wu

DATE CODE: * * * * *
YEAR MONTH LINE NO.
MONTH DAY


MEMORY MODULE SOCKET
HORIZONTAL TYPE
SINGLE ROW
NO. OF POS.
A8=260 POS.
SMT
CONTACT AREA PLATING
1=GOLD FLASH
Y=5u" GOLD PLATING
6=10u" GOLD PLATING
7=15u" GOLD PLATING
3=30u" GOLD PLATING

A S A A8 2 * - E A S B 0 - * H
H=HALOGEN FREE & LEAD FREE
7=TAPE REEL
4=SOFT TRAY
0=EXTENSION CODE
B=NORMAL TYPE, BLACK COLOR
S=STANDARD
A=9.2MM HEIGHT
E=DDR SO DIMM

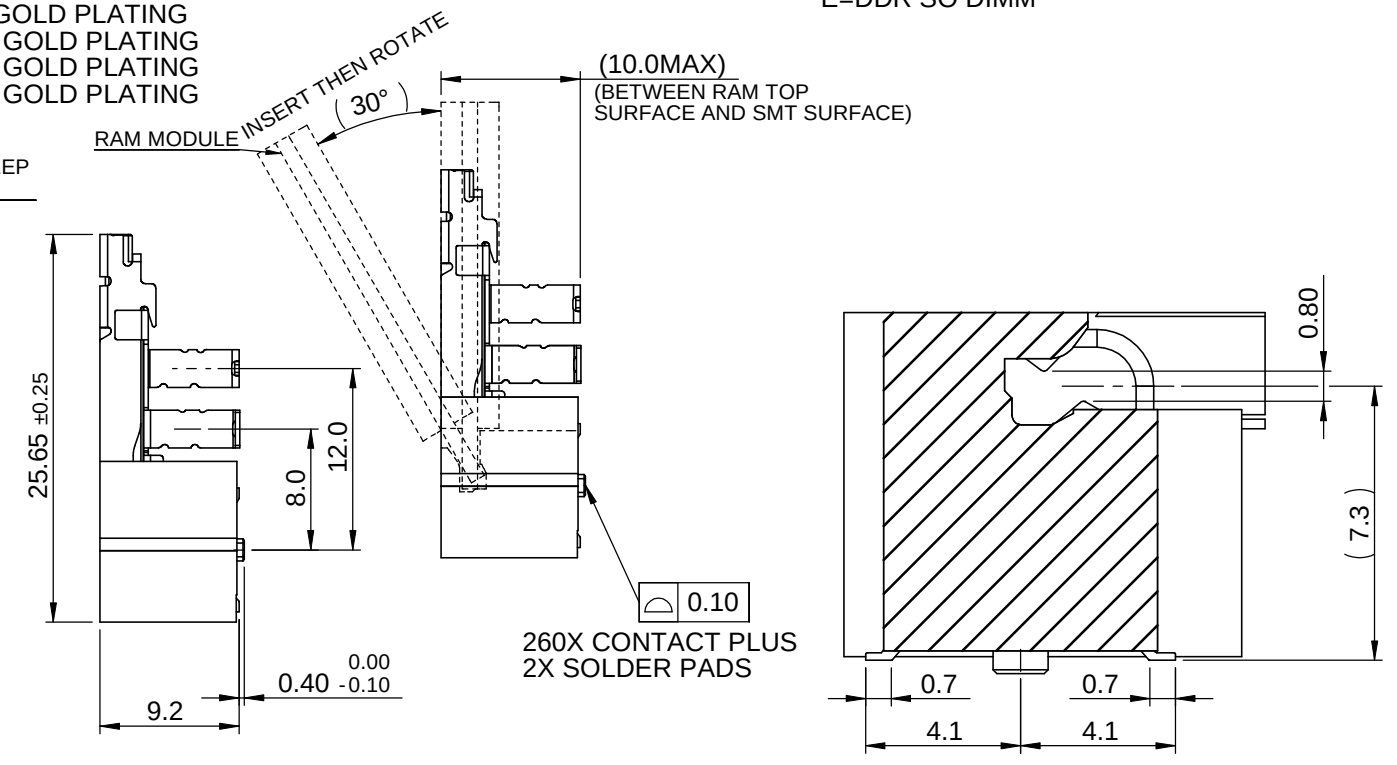







SECTION A-A

4	METAL SPRING	2	STAINLESS STEEL SUS 301	ULTRASONIC CLEANING
3	METAL PAD	2	STAINLESS STEEL SUS 301	10u" NICKEL UNDER PLATING 100u" MATTE TIN PLATING OVER SOLDER PAD AREA.
2	CONTACT	260	PHOSPHOR BRONZE C5210	50u" NICKEL UNDER PLATING GOLD FLASH OR 5u" OR 10u" AT CONTACT AREA; 90u" NICKEL UNDER PLATING 15u" OR 30u" GOLD PLATING AT CONTACT AREA; GOLD FLASH PLATING AT TAIL
1	HOUSING	1	LCP SV6808THF	UL94V-0, HALOGEN FREE, BLACK COLOR
ITEM	DESCRIPTION	Q'TY	METERIAL	TREATMENT

X.± 0.30	X.° ±	UNITS mm	NAME(INTENDED USE) DDR4 SO DIMM CONN.	FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				
.X± 0.25	.X.° ±			CLASS: □CONFIDENTIAL □ SECRET ■GENERAL	TITLE: CUSTOMER DRAWING 260PIN SODDDR4 9.2 STD.			
.XX± 0.15	.XX.° ±	PART NO.(INTENDED USE) ASAA82*-EASB0-*H						
.XXX±	.XXX.° ±		FINISH	APPD: Bruce Wu	DWG NO.: 317-0000-2533			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		Q'TY						CHKD: C.S. Li
			DRAW: Brooks Yang 2016/7/7		SCALE	SHEET	REV.	
					N/A	1/6	C	

SOLIDWORKS GENERATED DRAWING, DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

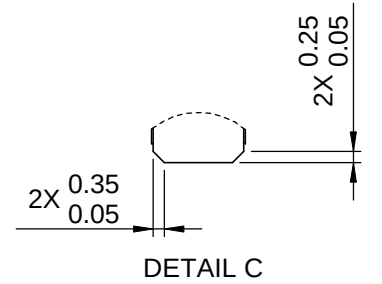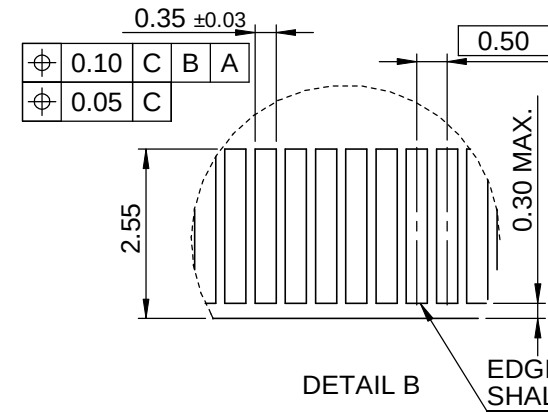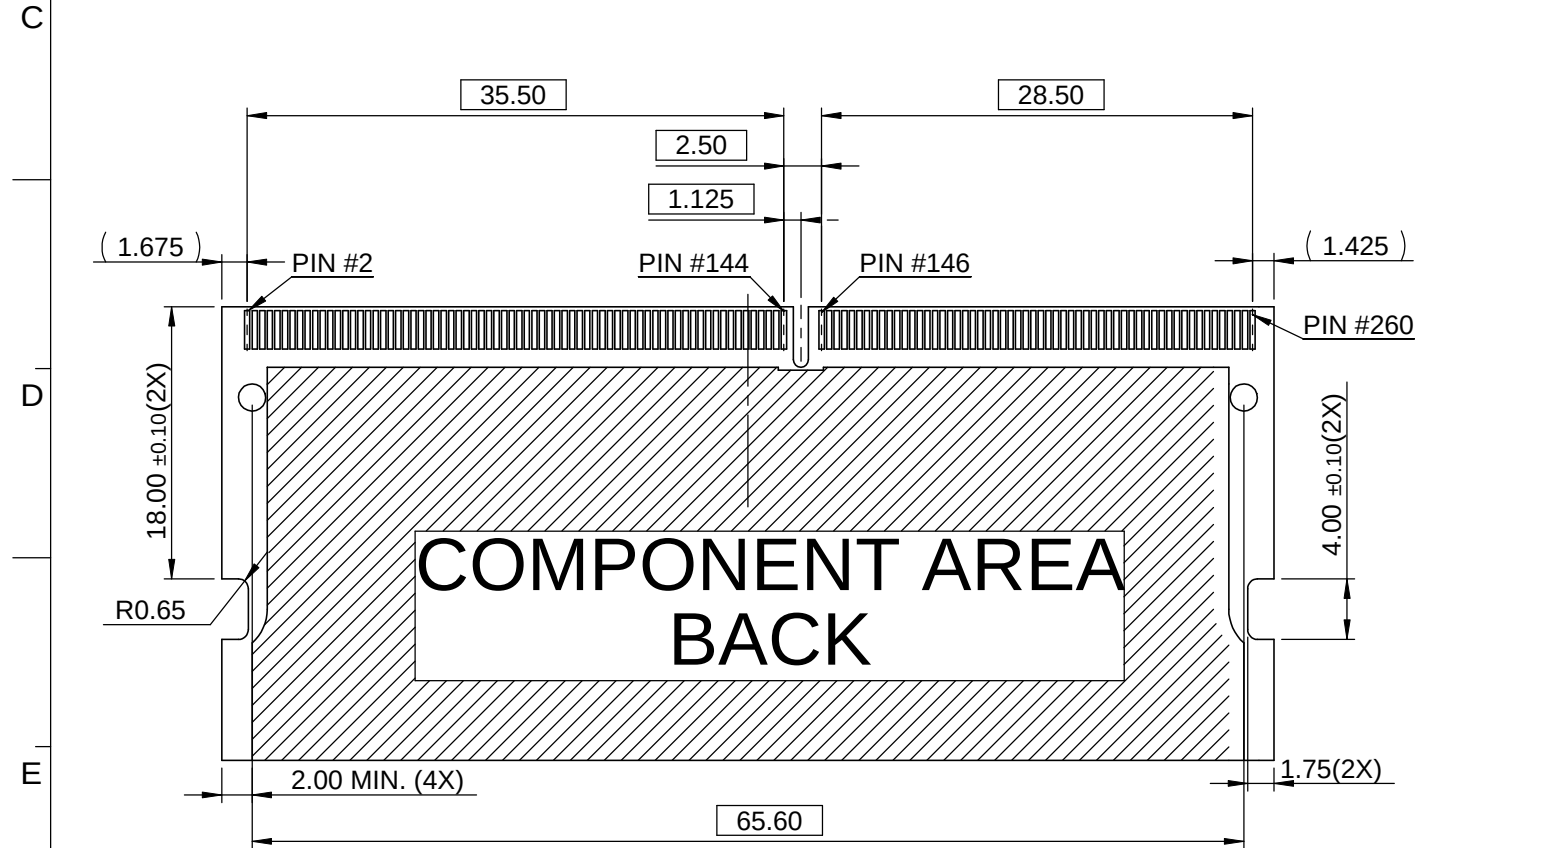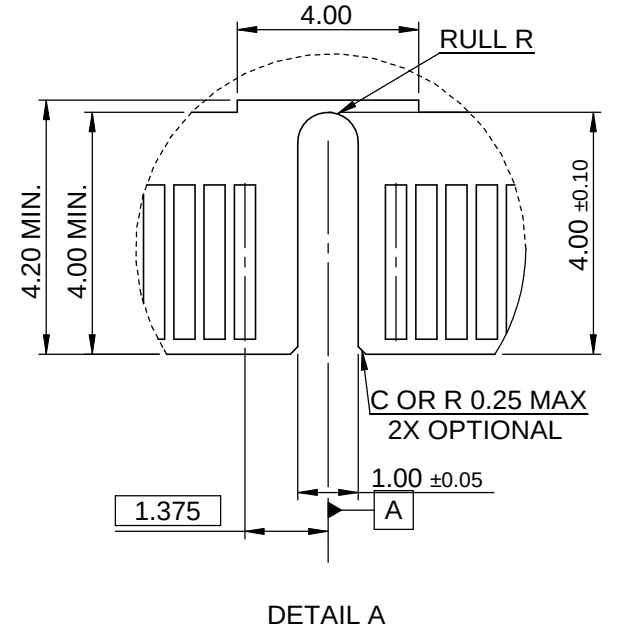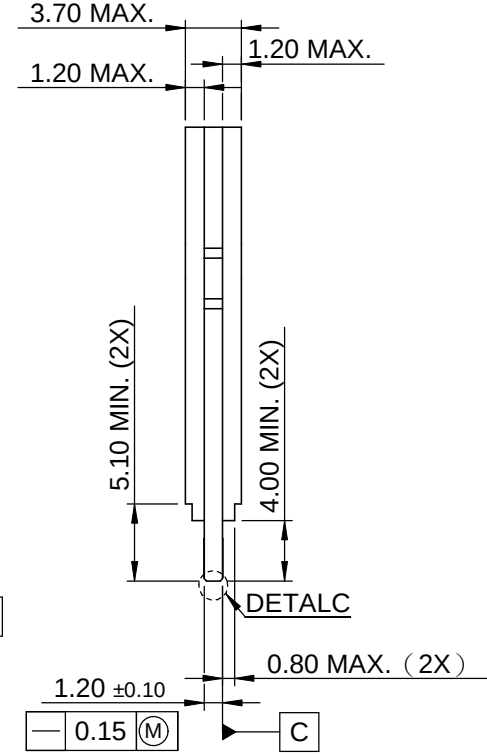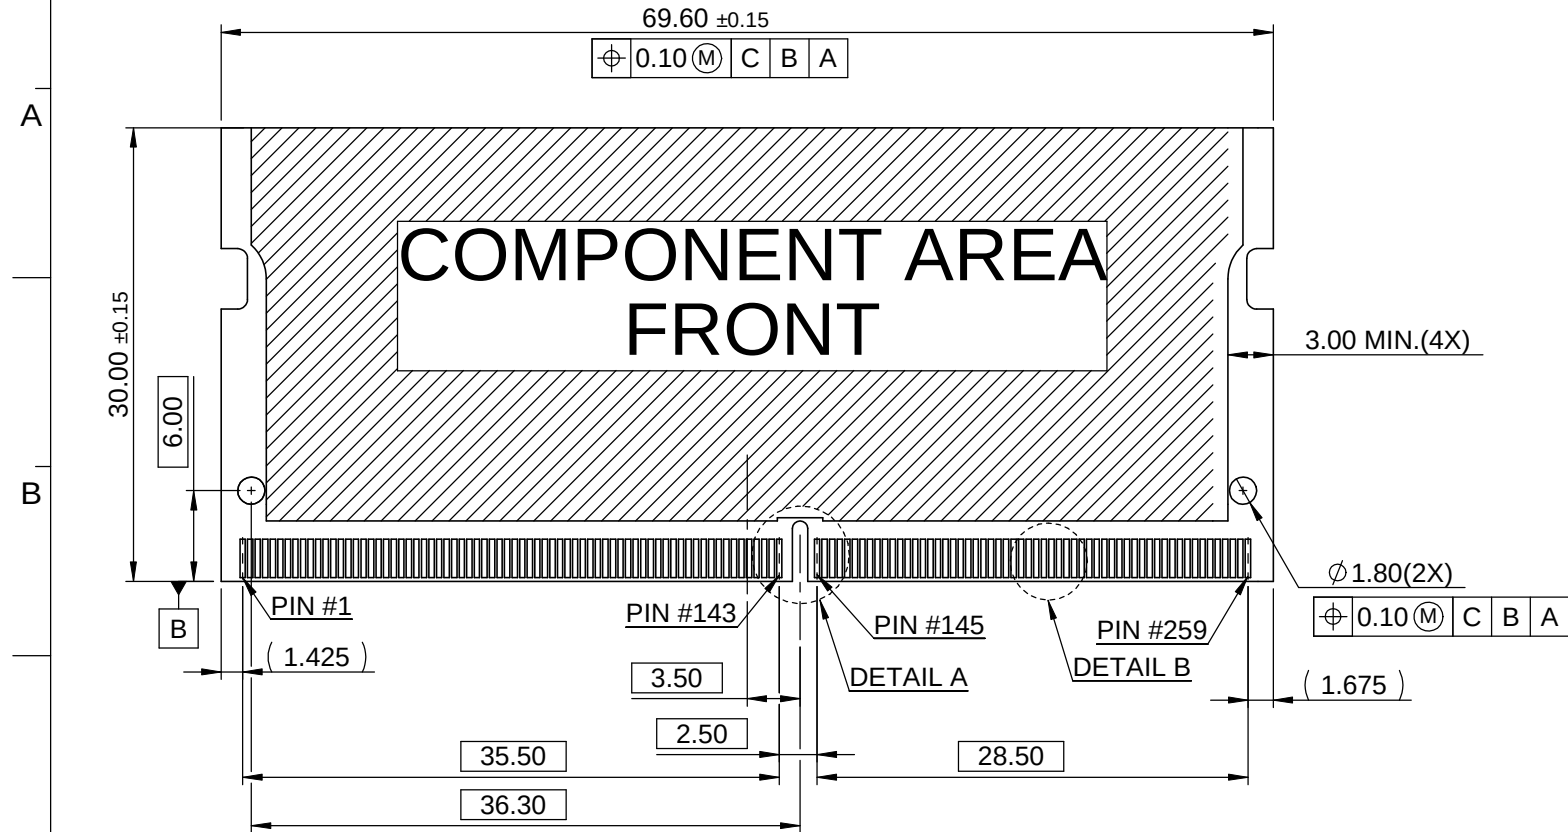


DDR4 SO DIMM MODULE BOARD LAYOUT



X.± 0.25	X°.±	UNITS mm	NAME(INTENDED USE) DDR4 SO DIMM CONN.	FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		
.X± 0.10	.X°.±	MAT'L	PART NO.(INTENDED USE) ASAA82*-EASB0-*H	CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL		
.XX± 0.05	.XX°.±	FINISH	APPD: Bruce Wu	TITLE: CUSTOMER DRAWING 260PIN SODDR4 9.2 STD.		
.XXX±	.XXX°.±	Q'TY	CHKD: C.S. Li	DWG NO.: 317-0000-2533		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			DRAW: Brooks Yang 2016/7/7		SCALE N/A	SHEET 2/6
					REV. C	

SOLIDWORKS GENERATED DRAWING, DON'T CHANGE BY HAND.


REV.	ECN. NO.	APPD.

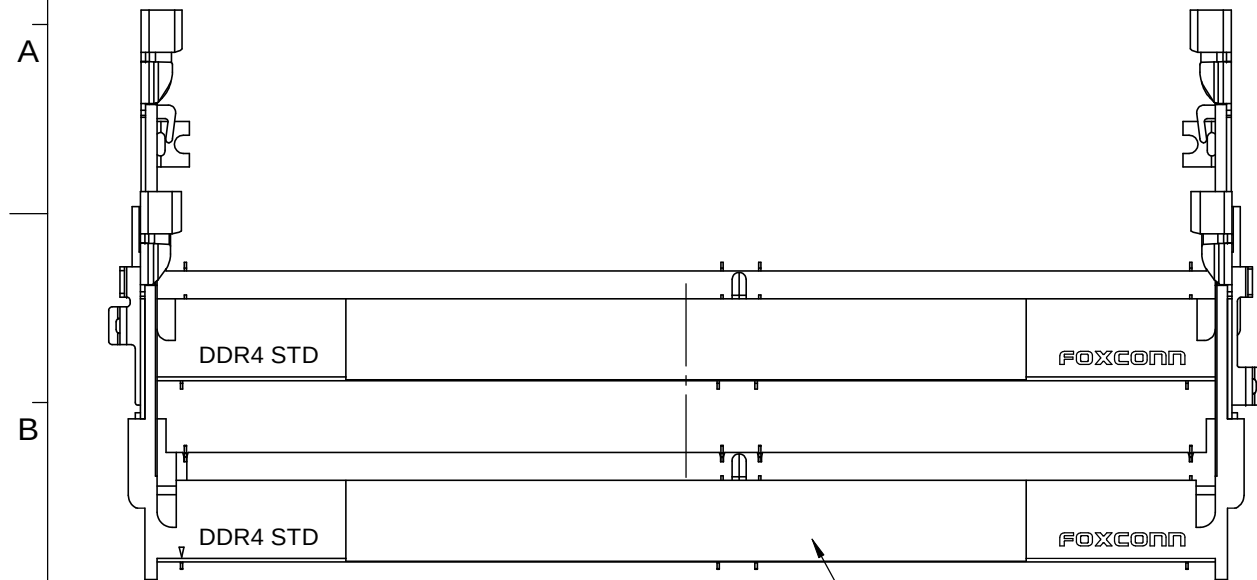

ASAA82*-EASB0-*H

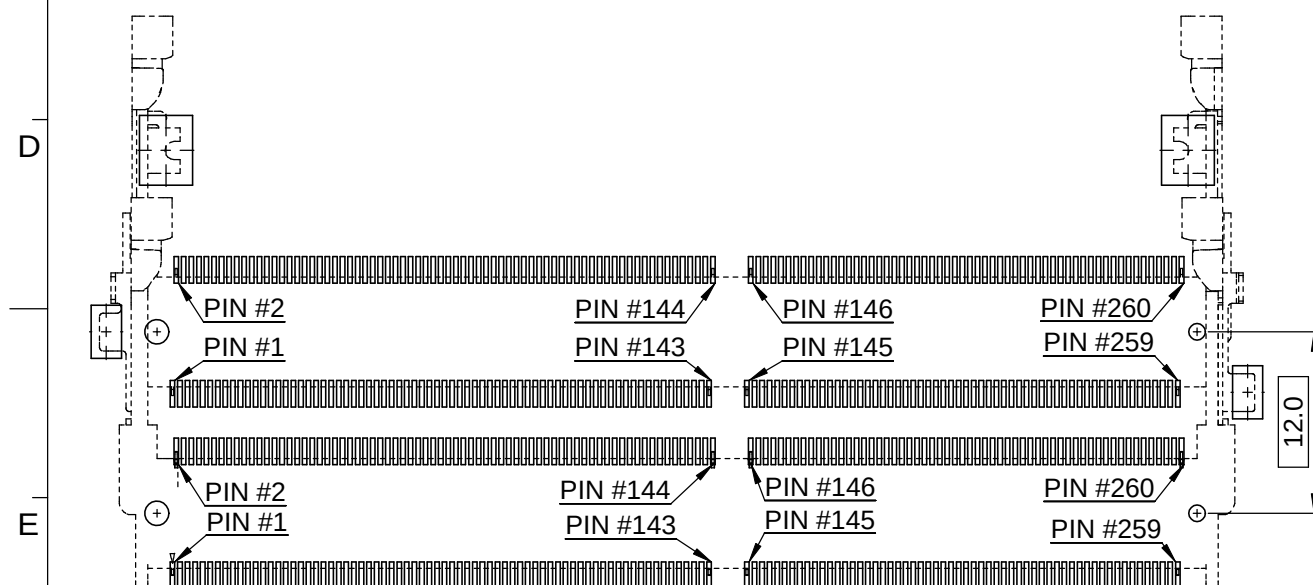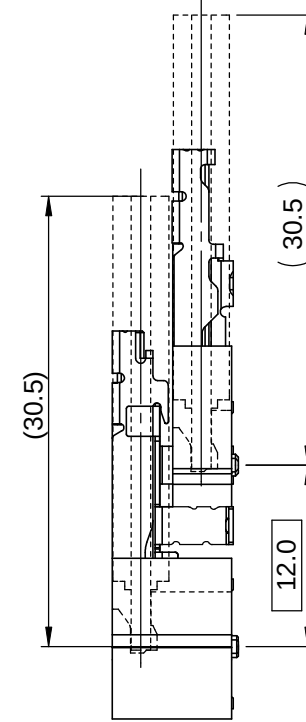

P.C.B. LAYOUT(STACKED ORIENTATION)

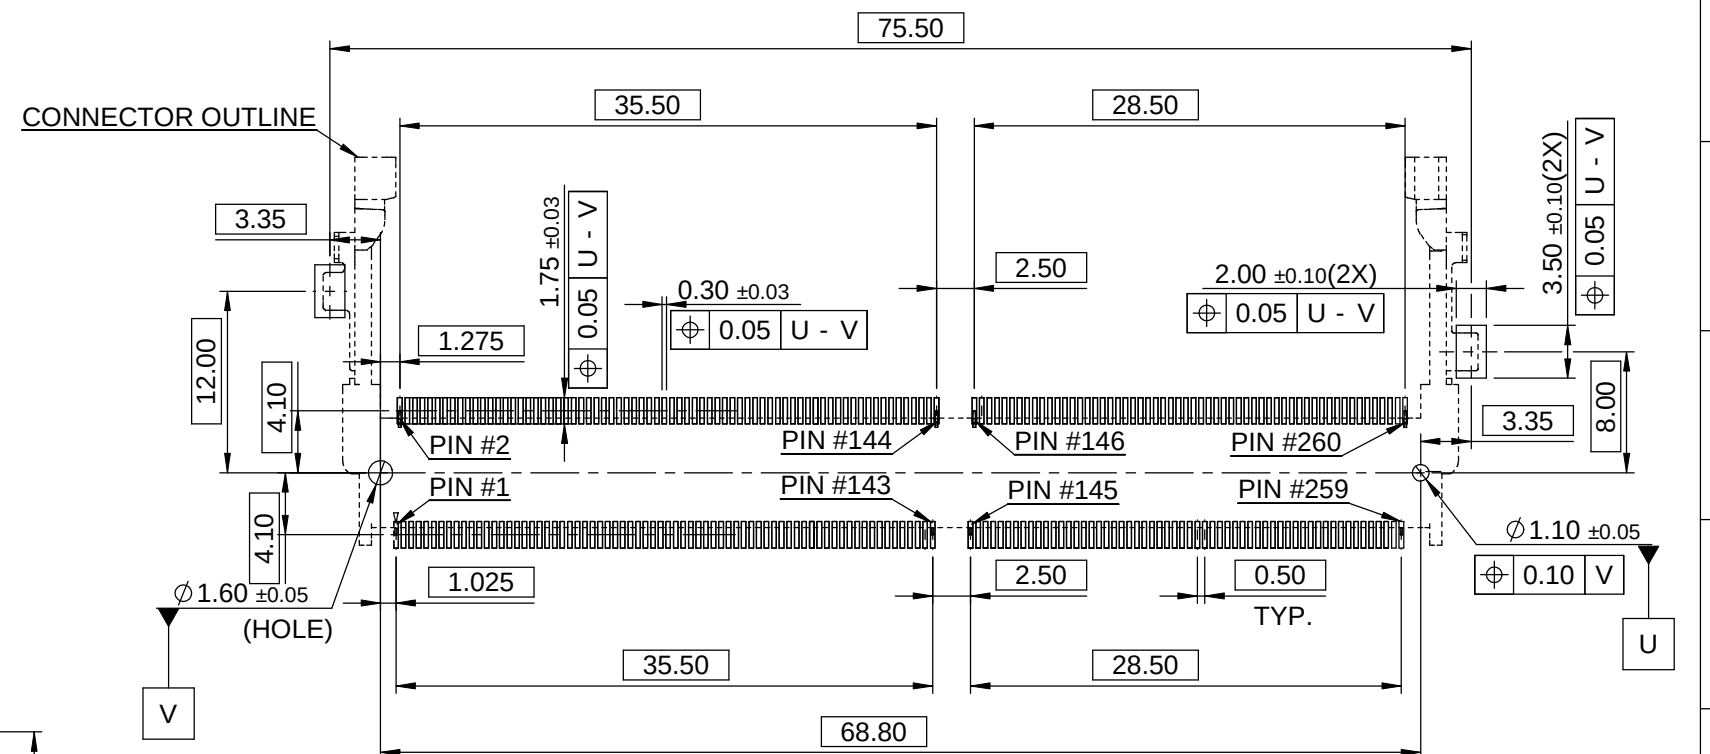


P.C.B. LAYOUT(RECOMMEND THICKNESS =1.40MM)

X. ± 0.25	X°. ±	UNITS mm	NAME(INTENDED USE) DDR4 SO DIMM CONN.	FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			
.X ± 0.10	.X°. ±						
.XX ± 0.05	.XX°. ±	MAT'L	PART NO.(INTENDED USE) ASAA82*-EASB0-*H	CLASS: □CONFIDENTIAL □ SECRET ■GENERAL			
.XXX±	.XXX°. ±			FINISH	TITLE: CUSTOMER DRAWING 260PIN SODDR4 9.2 STD.		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		Q'TY	APPD: Bruce Wu		DWG NO.: 317-0000-2533		
			CHKD: C.S Li		SCALE	SHEET	REV.
			DRAW: Brooks Yang 2016/7/7		N/A	3/6	C


REV.	ECN. NO.	APPD.



X.± 0.25	X°.±	UNITS mm	NAME(INTENDED USE) DDR4 SO DIMM CONN.		FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			
.X± 0.10	.X°.±				MAT'L	PART NO.(INTENDED USE) ASAA82*-EASB0-*H	CLASS: □CONFIDENTIAL □SECRET ■GENERAL	
.XX± 0.05	.XX°.±	FINISH	TITLE: CUSTOMER DRAWING 260PIN SODDR4 9.2 STD.				DWG NO.: 317-0000-2533	
.XXX±	.XXX°.±				APPD: Bruce Wu			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		Q'TY	CHKD: C.S. Li			SCALE	SHEET	REV.
			DRAW: Brooks Yang 2016/7/7			N/A	4/6	C

SOLIDWORKS GENERATED DRAWING, DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

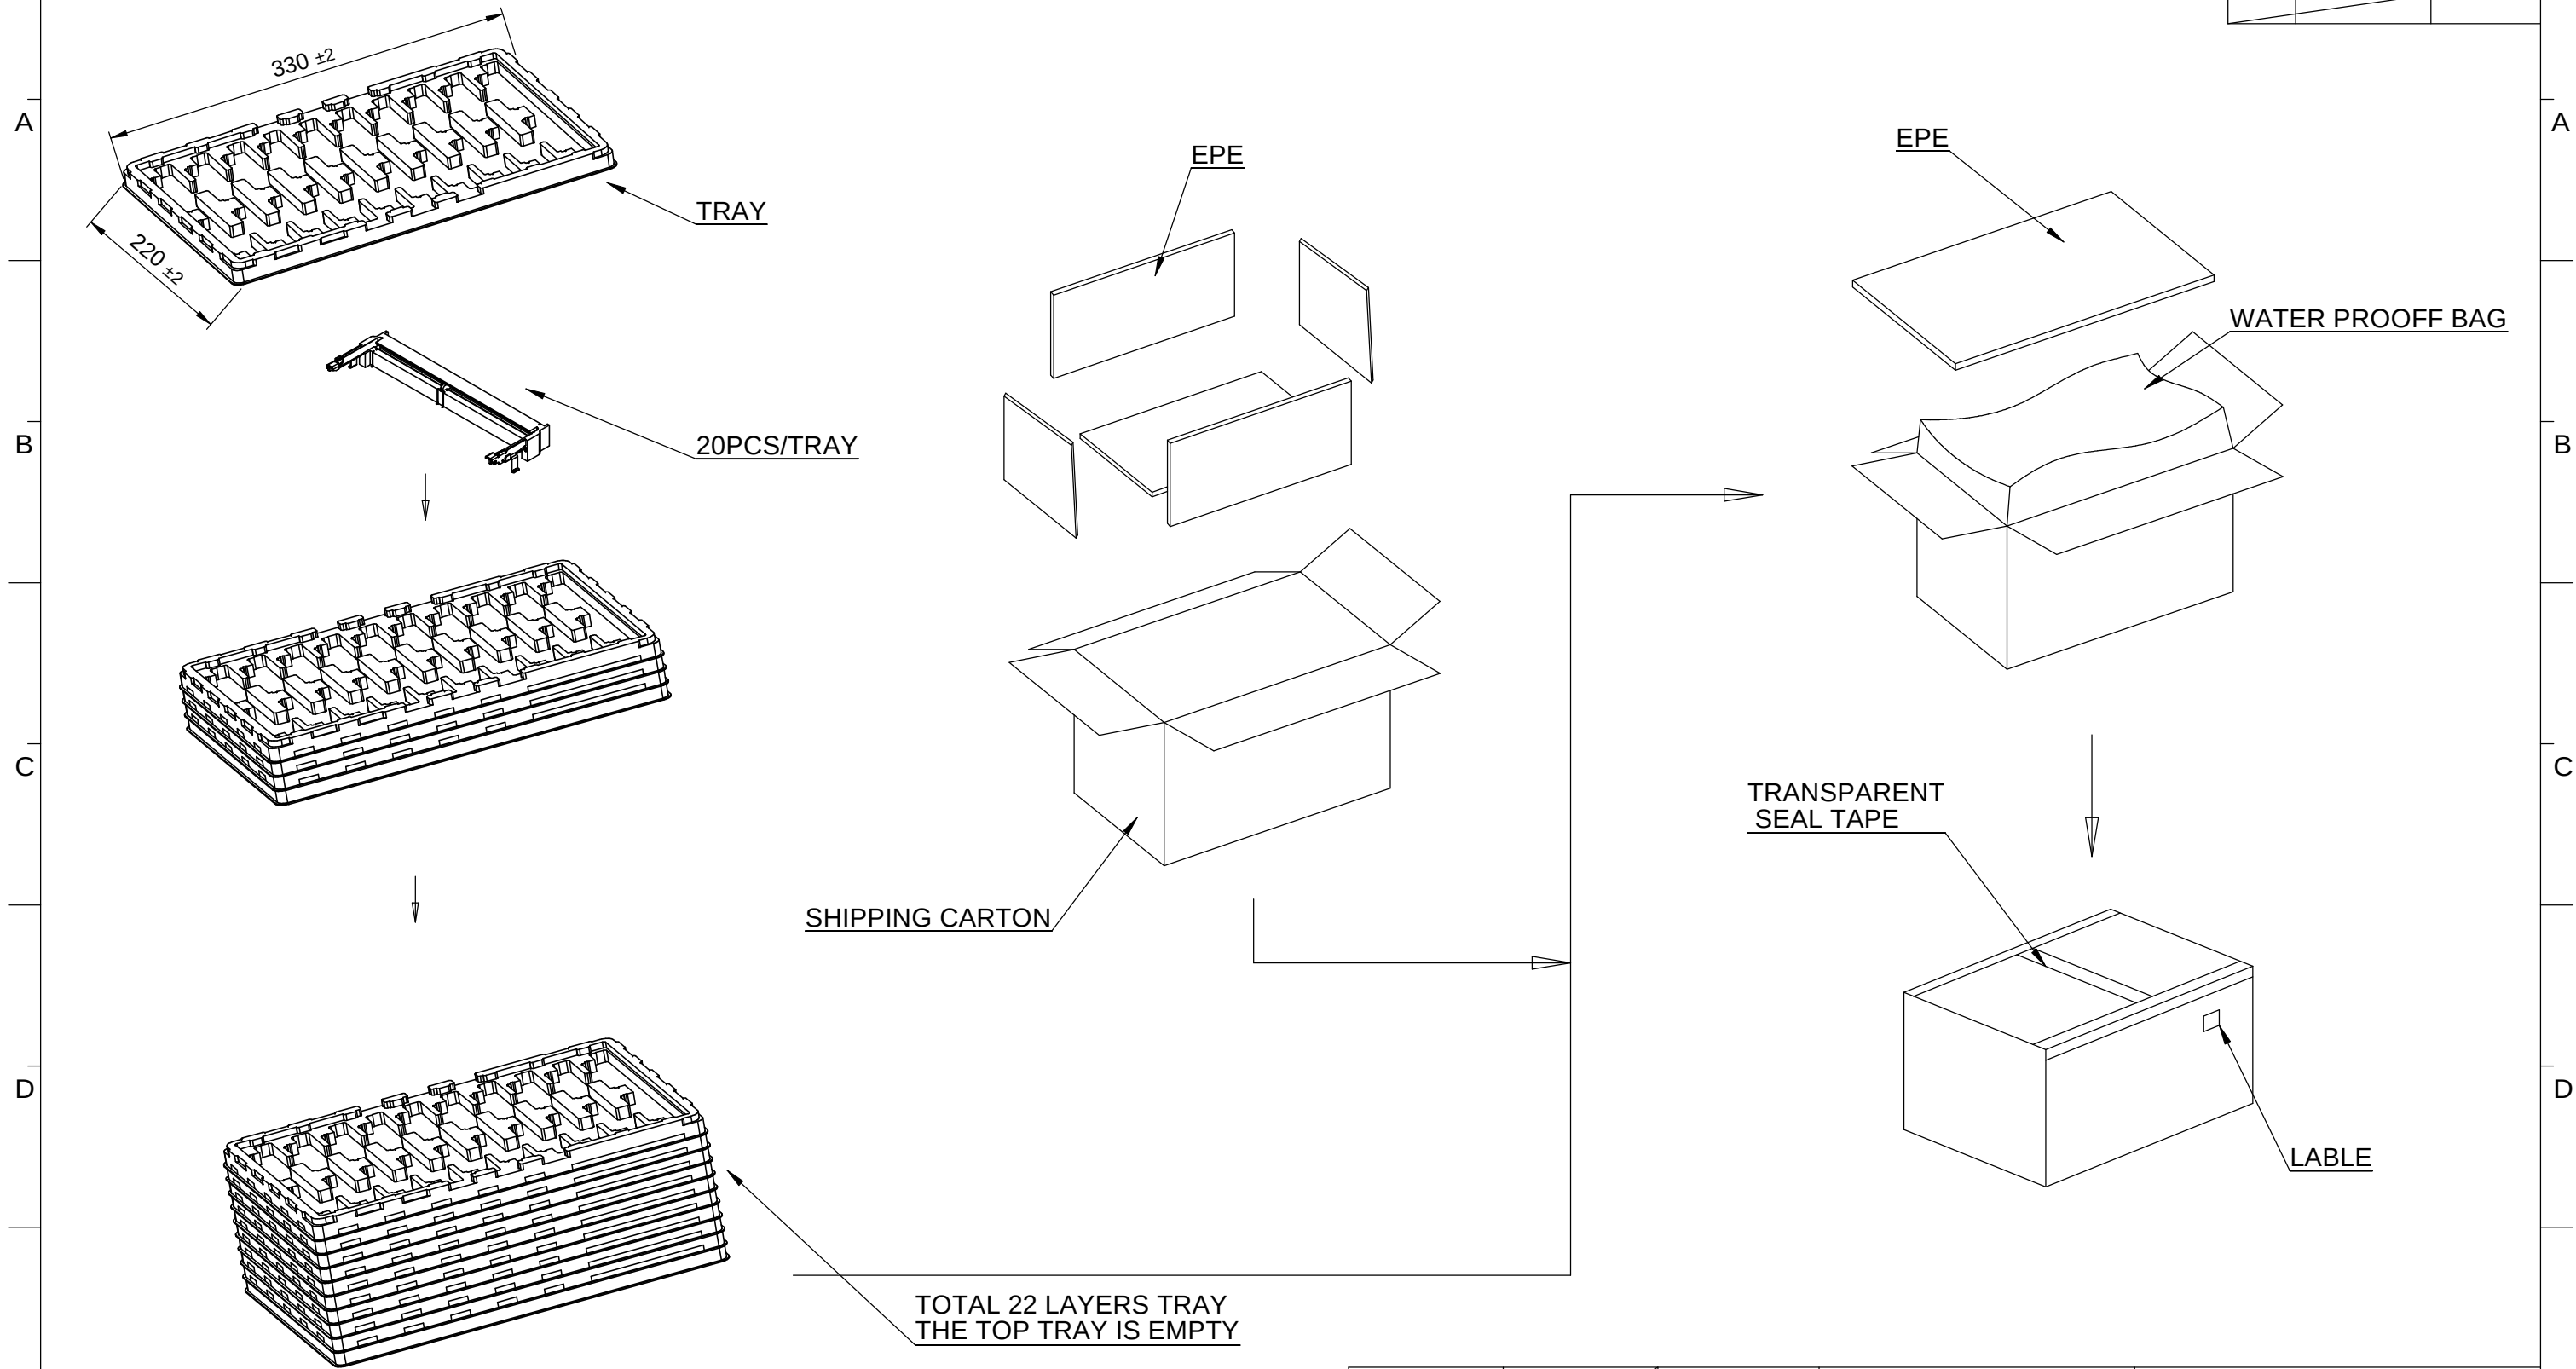



PACKING CAPACITY : 20 PCS/TRAY, 21 TRAYS/BOX,
TOTAL 420 PCS/BOX.

CONNECTOR P/N ASAA82*-EASB0-4H

X. ± 1.5	X. ° ±	UNITS mm	NAME(INTENDED USE) DDR4 SO DIMM CONN.	FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.		
.X ± 1.0	.X ° ±	MAT'L	PART NO.(INTENDED USE) ASAA82*-EASB0-*H	CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL		
.XX ± 0.2	.XX ° ±	FINISH	APPD: Bruce Wu	TITLE: CUSTOMER DRAWING 260PIN SODDR4 9.2 STD.		
.XXX ±	.XXX ° ±	Q'TY	CHKD: C.S. Li	DWG NO.: 317-0000-2533		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			DRAW: Brooks Yang 2016/7/7			
				SCALE N/A	SHEET 5/6	REV. C


SOLIDWORKS GENERATED DRAWING, DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

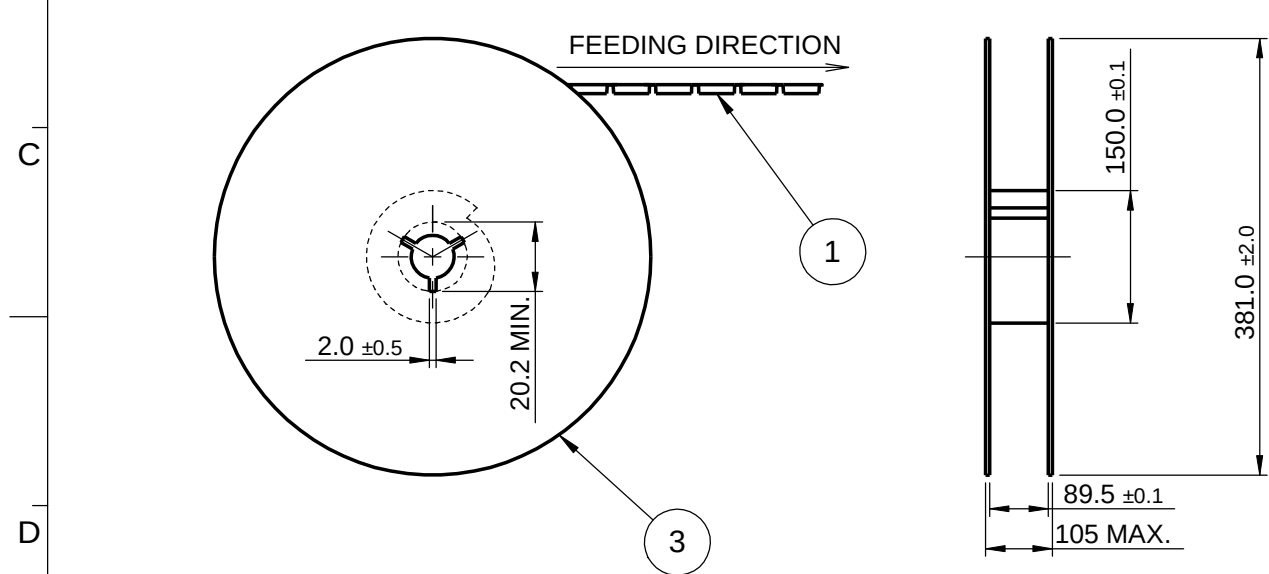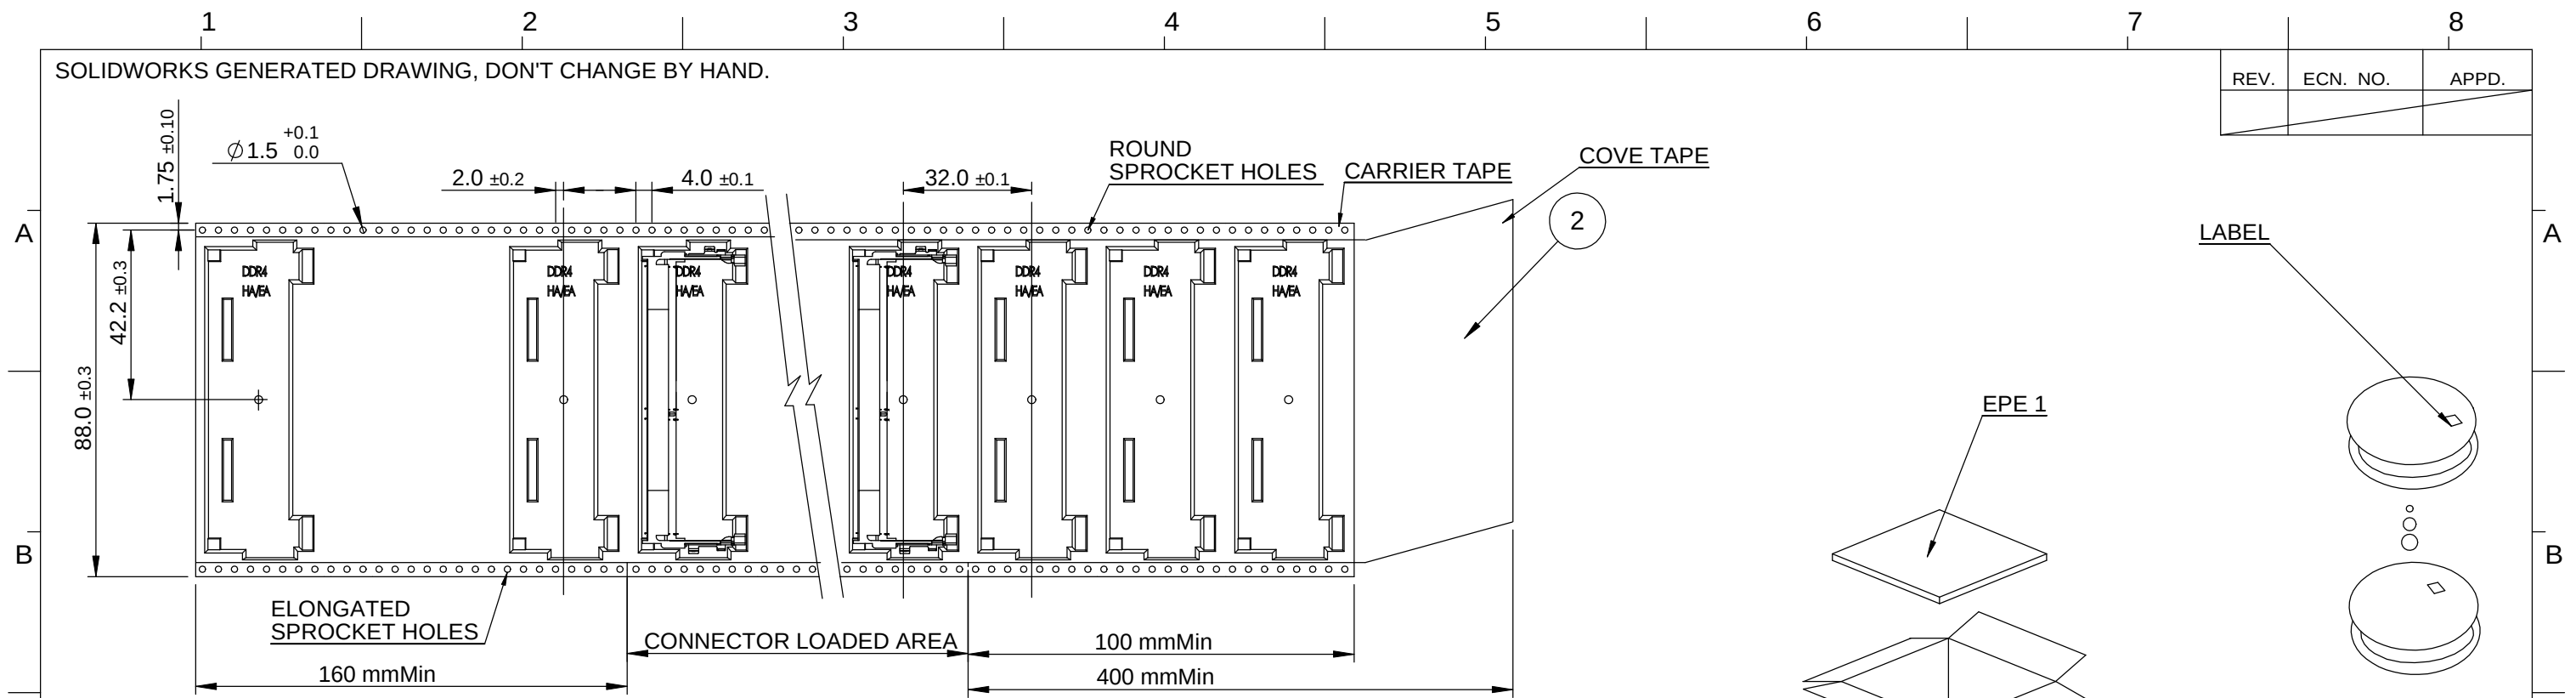


NOTES:


1. 10 POCKETS HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.20\text{mm}$.
2. COVER TAPE PEELING STRENGTH : 0.01 kgf MIN. 0.15 kgf MAX. AT 300mm/min.

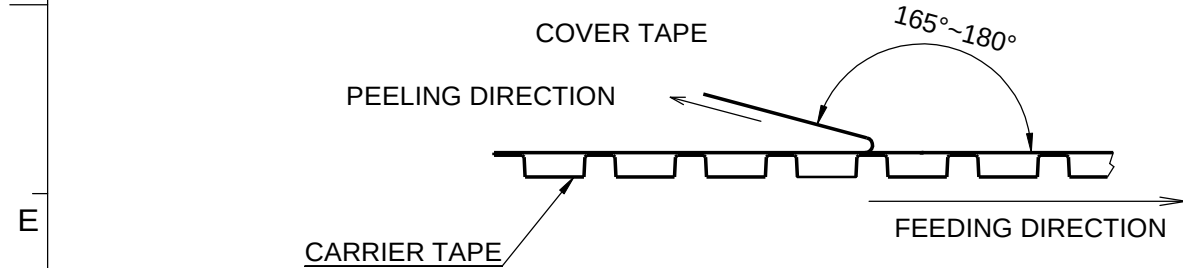

3. PACKING CAPACITY : 230 PCS/REEL, 3 REELS/BOX, TOTAL 690 PCS/BOX.

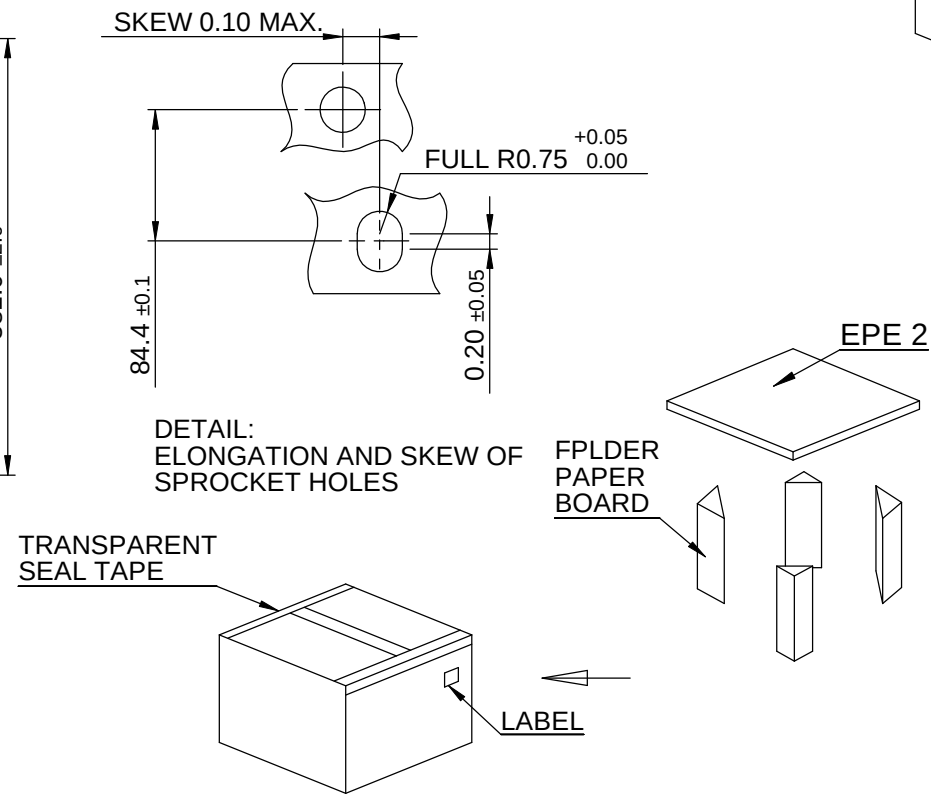

3	REEL	POLYSTYRENE
2	COVER TAPE	POLYESTER
1	CARRIER TAPE	POLYSTYRENE
ITEM	DESCRIPTION	MATERIAL

X.± 1.5	X°.±	UNITS mm	NAME(INTENDED USE) DDR4 SO DIMM CONN.	FOXCONN® FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				
.X± 1.0	.X°.±	MAT'L	PART NO.(INTENDED USE) ASAA82*-EASB0-*H	CLASS: □CONFIDENTIAL □SECRET ■GENERAL				
.XX± 0.2	.XX°.±	FINISH		TITLE: CUSTOMER DRAWING 260PIN SODDR4 9.2 STD.				
.XXX±	.XXX°.±		Q'TY	APPD: Bruce Wu	DWG NO.: 317-0000-2533			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				CHKD: C.S. Li		SCALE	SHEET	REV.
				DRAW: Brooks Yang 2016/7/7		N/A	6/6	C

CONNECTOR P/N	ASAA82*-EASB0-7H
---------------	------------------