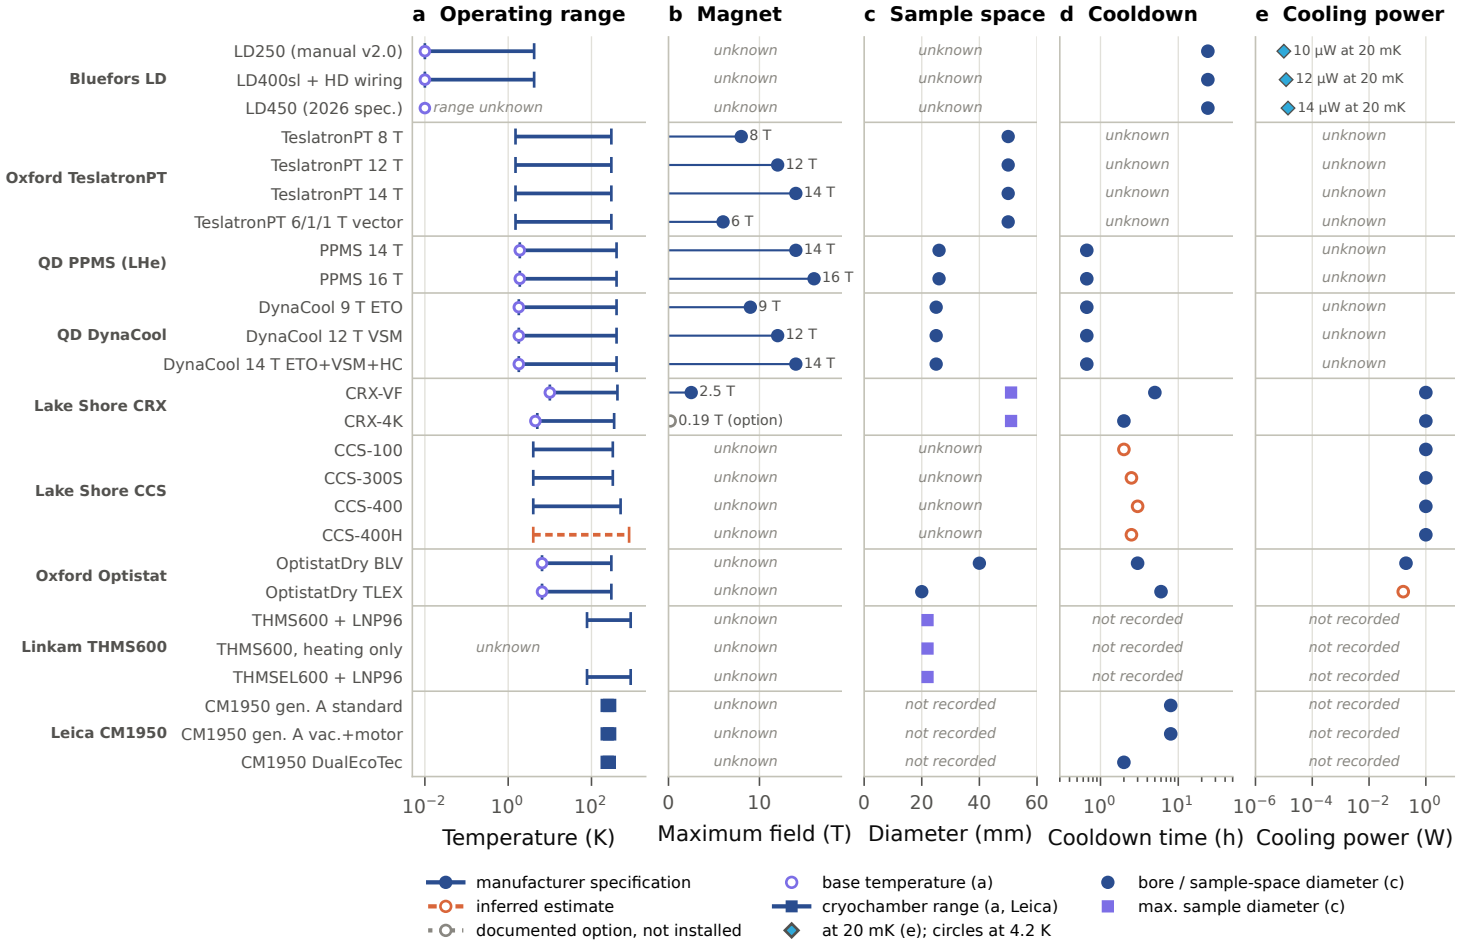
a Operating range
b Magnet
c Sample space
d Cooldown
e Cooling power
Bluefors LD
LD250 (manual v2.0)
LD400sl + HD wiring
LD450 (2026 spec.)
range unknown
Oxford TeslatronPT
TeslatronPT 8 T
TeslatronPT 12 T
TeslatronPT 14 T
TeslatronPT 6/1/1 T vector
QD PPMS (LHe)
PPMS 14 T
PPMS 16 T
QD DynaCool
DynaCool 9 T ETO
DynaCool 12 T VSM
DynaCool 14 T ETO+VSM+HC
Lake Shore CRX
CRX-VF
CRX-4K
Lake Shore CCS
CCS-100
CCS-300S
CCS-400
CCS-400H
Oxford Optistat
OptistatDry BLV
OptistatDry TLEX
Linkam THMS600
THMS600 + LNP96
THMS600, heating only
THMSEL600 + LNP96
Leica CM1950
CM1950 gen. A standard
CM1950 gen. A vac.+motor
CM1950 DualEcoTec
unknown
8 T
12 T
14 T
6 T
16 T
9 T
2.5 T
0.19 T (option)
10 µW at 20 mK
12 µW at 20 mK
14 µW at 20 mK
not recorded
10^{-2}
10^{0}
10^{2}
0
10
20
40
60
10^{1}
10^{-6}
10^{-4}
Temperature (K)
Maximum field (T)
Diameter (mm)
Cooldown time (h)
Cooling power (W)
manufacturer specification
inferred estimate
documented option, not installed
base temperature (a)
cryochamber range (a, Leica)
at 20 mK (e); circles at 4.2 K
bore / sample-space diameter (c)
max. sample diameter (c)