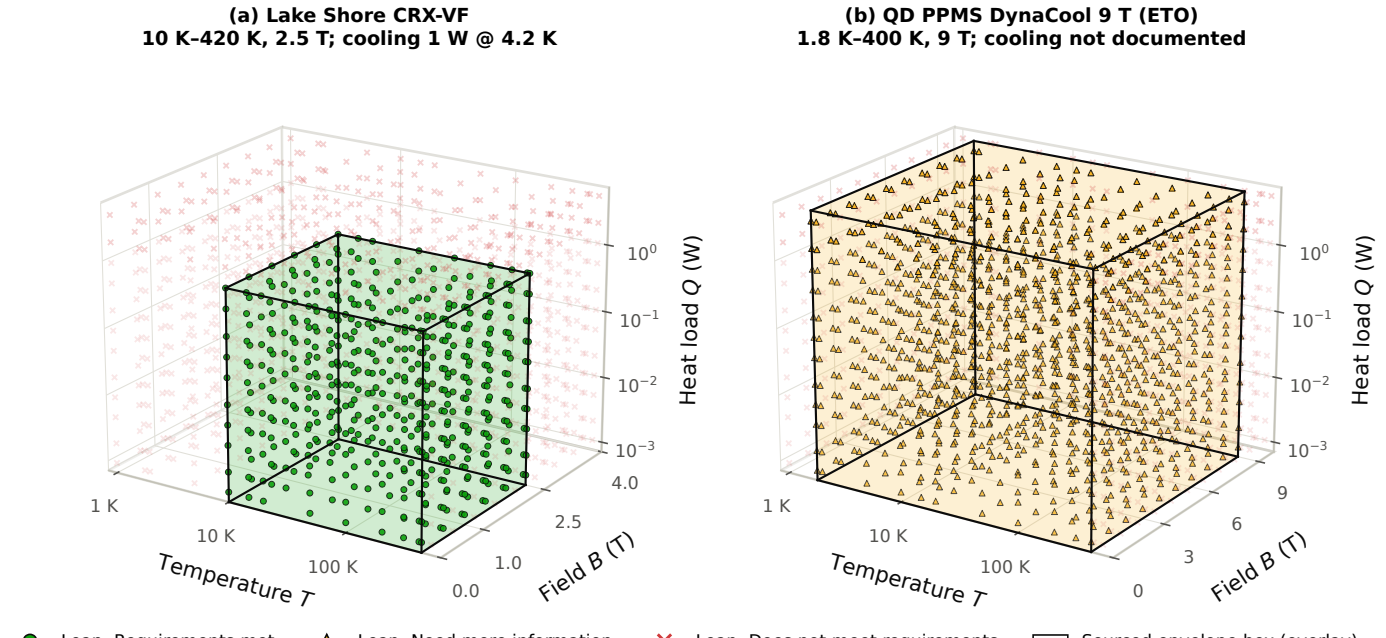

(a) Lake Shore CRX-VF
10 K–420 K, 2.5 T; cooling 1 W @ 4.2 K
(b) QD PPMS DynaCool 9 T (ETO)
1.8 K–400 K, 9 T; cooling not documented
Heat load Q (W)
10^0
10^−1
10^−2
10^−3
1 K
10 K
100 K
Temperature T
0.0
1.0
2.5
4.0
Field B (T)
0
3
6
9
Lean: Requirements met
Lean: Need more information
Lean: Does not meet requirements
Sourced envelope box (overlay)