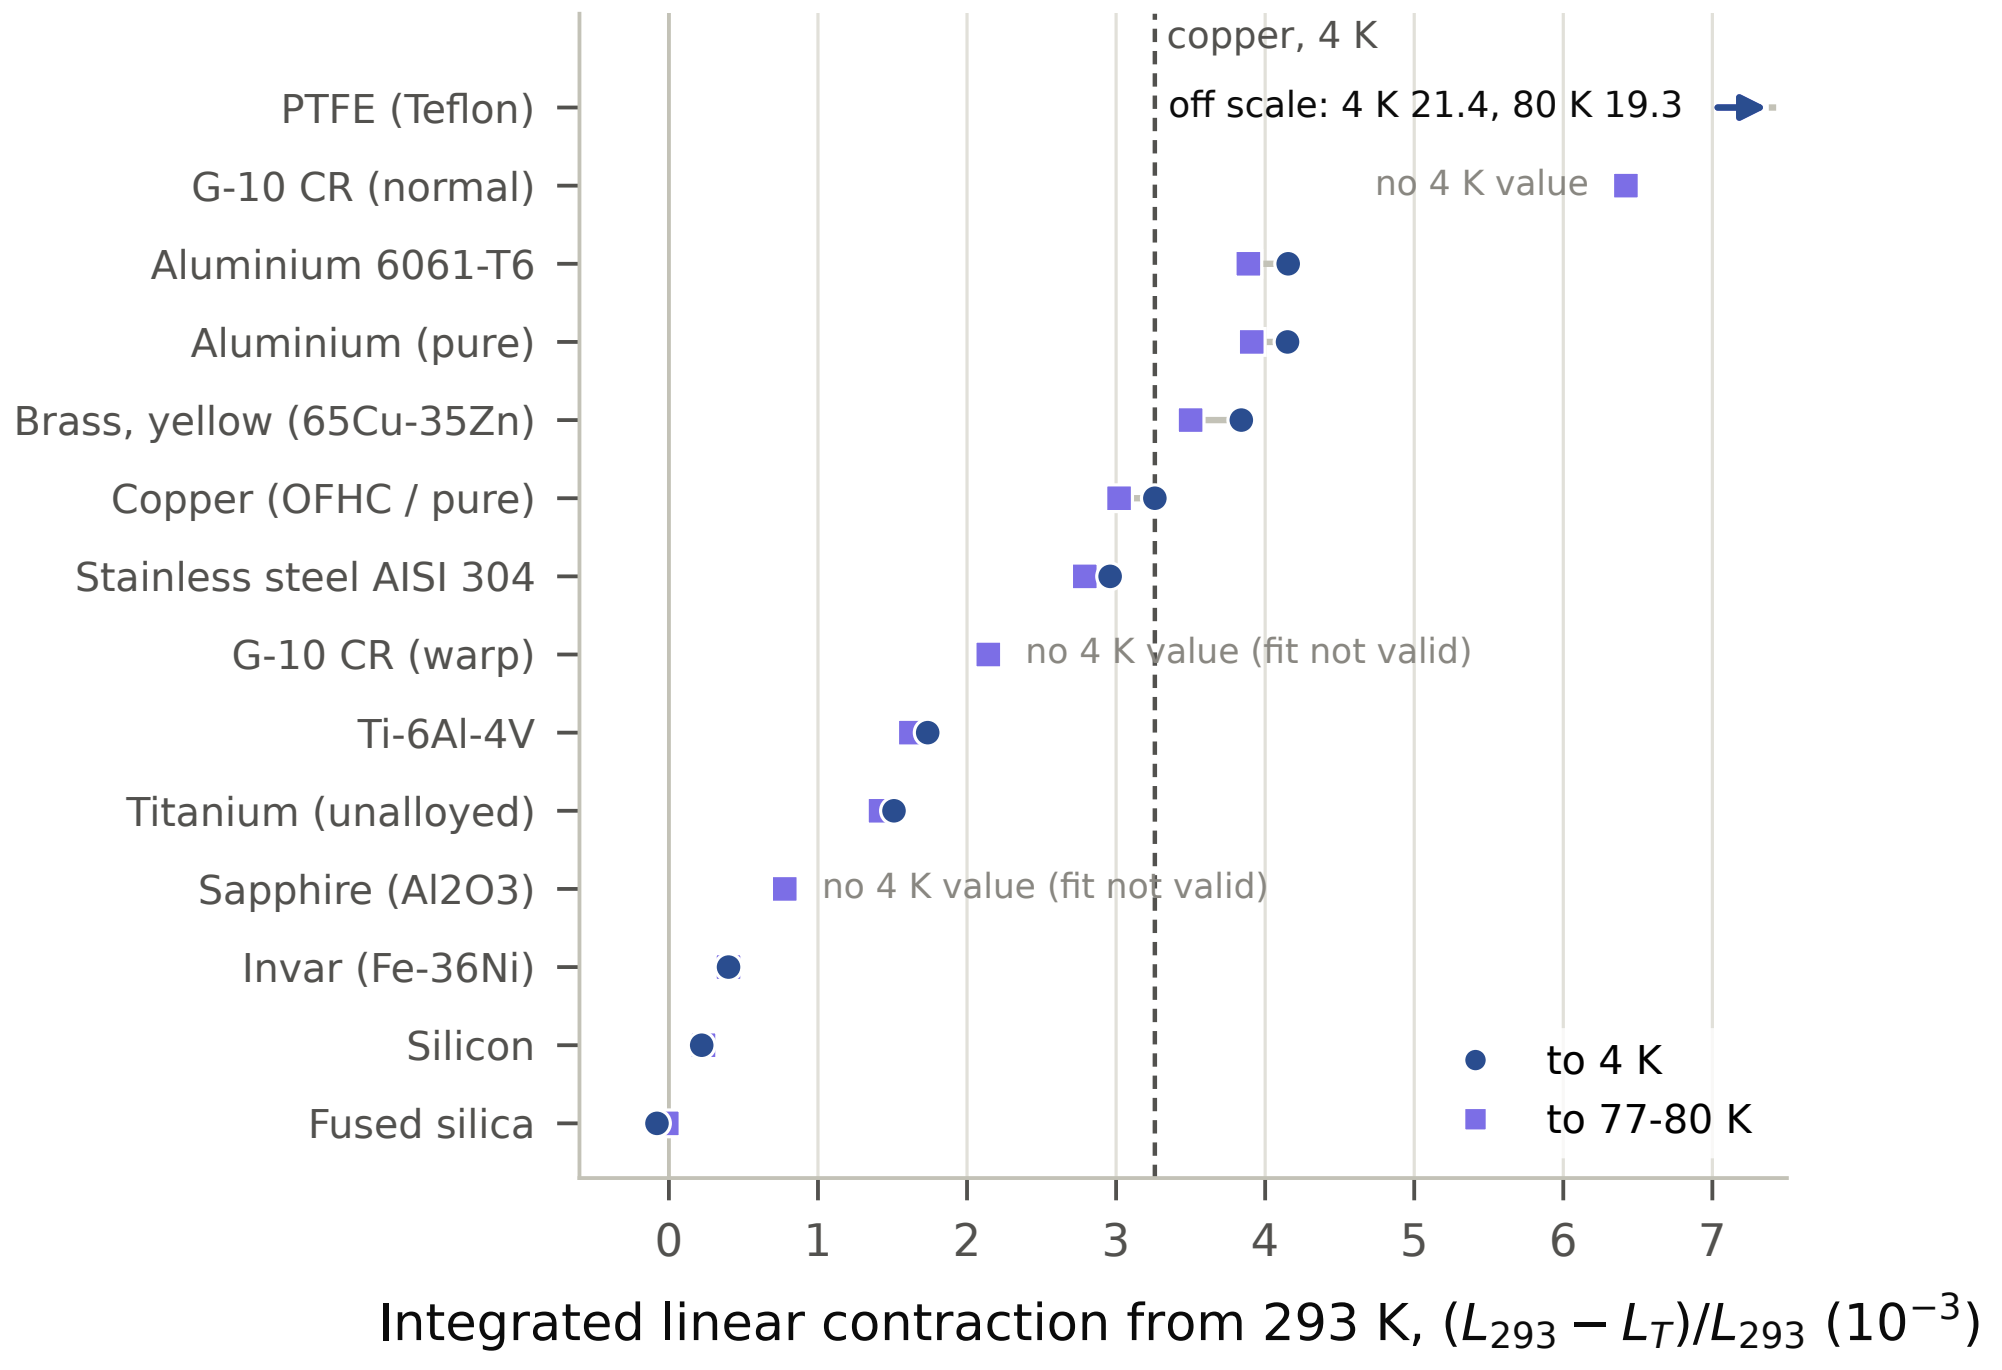
copper, 4 K
off scale: 4 K 21.4, 80 K 19.3
PTFE (Teflon)
G-10 CR (normal)
no 4 K value
Aluminium 6061-T6
Aluminium (pure)
Brass, yellow (65Cu-35Zn)
Copper (OFHC / pure)
Stainless steel AISI 304
G-10 CR (warp)
no 4 K value (fit not valid)
Ti-6Al-4V
Titanium (unalloyed)
Sapphire (Al2O3)
no 4 K value (fit not valid)
Invar (Fe-36Ni)
Silicon
Fused silica
to 4 K
to 77-80 K
0
1
2
3
4
5
6
7
Integrated linear contraction from 293 K, $(L_{293} - L_T)/L_{293}$ (10^{-3})