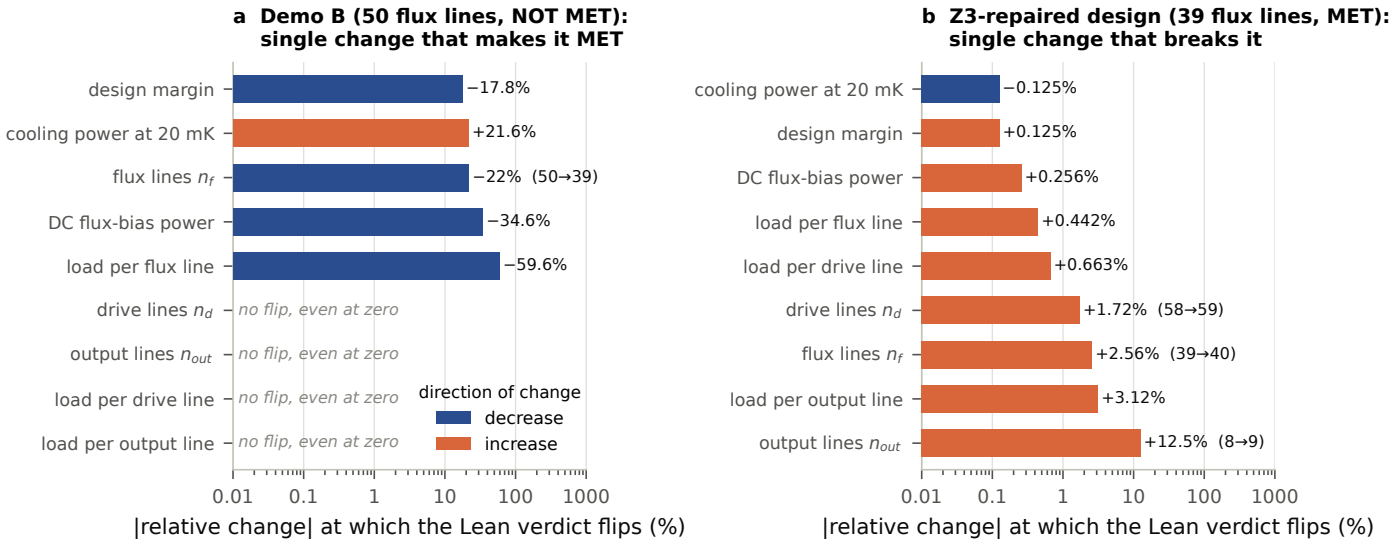
a Demo B (50 flux lines, NOT MET): single change that makes it MET
design margin
cooling power at 20 mK
flux lines n_f
DC flux-bias power
load per flux line
drive lines n_d
output lines n_{out}
load per drive line
load per output line
−17.8%
+21.6%
−22% (50→39)
−34.6%
−59.6%
no flip, even at zero
no flip, even at zero
no flip, even at zero
no flip, even at zero
direction of change
decrease
increase
0.01
0.1
1
10
100
1000
|relative change| at which the Lean verdict flips (%)
b Z3-repaired design (39 flux lines, MET): single change that breaks it
cooling power at 20 mK
design margin
DC flux-bias power
load per flux line
load per drive line
drive lines n_d
flux lines n_f
load per output line
output lines n_{out}
−0.125%
+0.125%
+0.256%
+0.442%
+0.663%
+1.72% (58→59)
+2.56% (39→40)
+3.12%
+12.5% (8→9)
0.01
0.1
1
10
100
1000
|relative change| at which the Lean verdict flips (%)