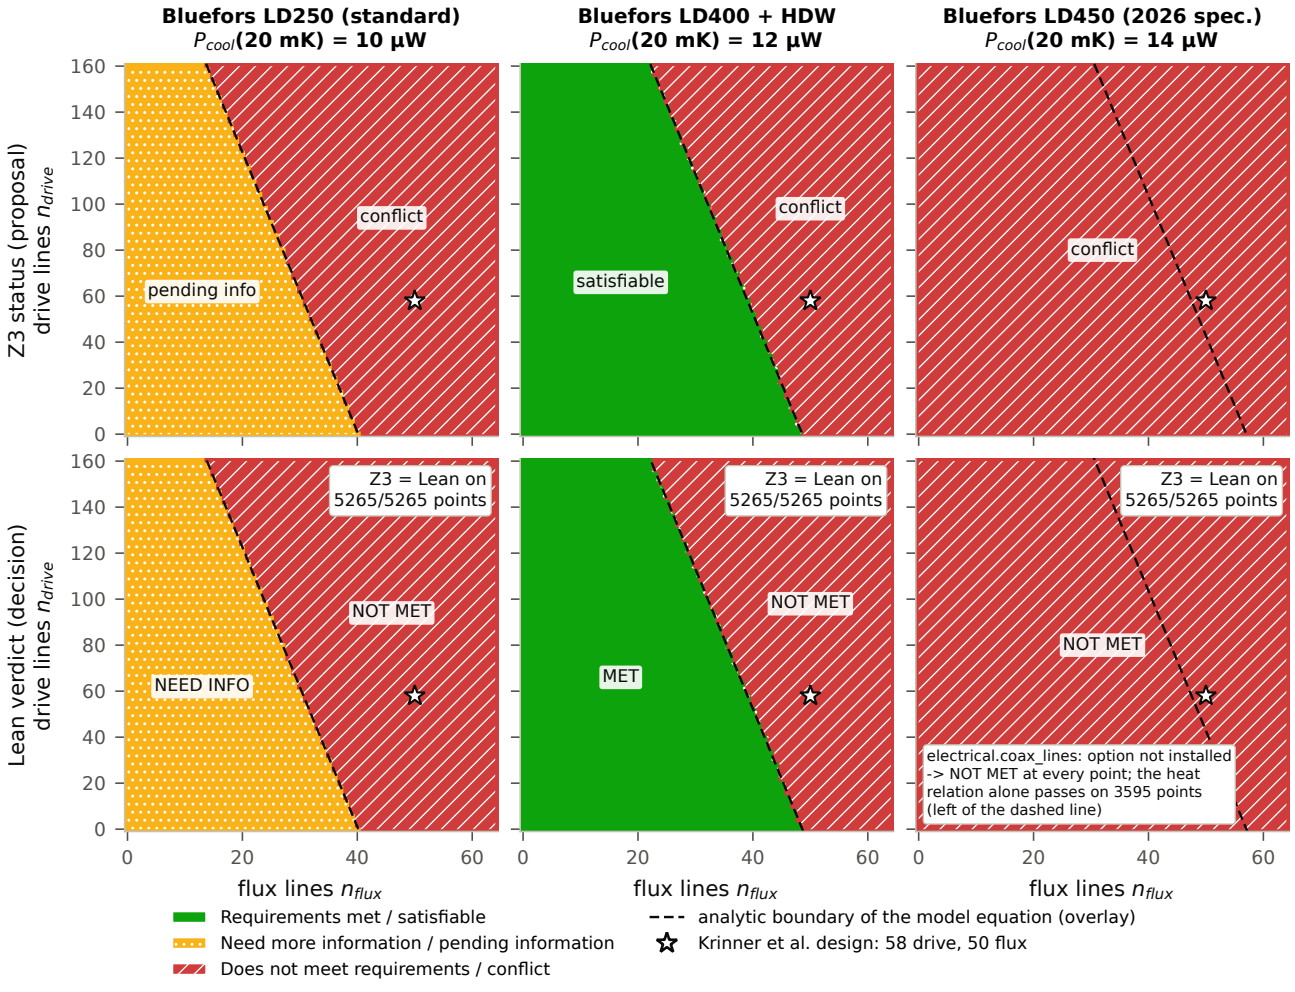

Bluefors LD250 (standard)
P_{cool}(20 mK) = 10 µW
Bluefors LD400 + HDW
P_{cool}(20 mK) = 12 µW
Bluefors LD450 (2026 spec.)
P_{cool}(20 mK) = 14 µW
Z3 status (proposal)
drive lines n_{drive}
Lean verdict (decision)
drive lines n_{drive}
pending info
conflict
satisfiable
conflict
conflict
NEED INFO
NOT MET
MET
NOT MET
Z3 = Lean on
5265/5265 points
Z3 = Lean on
5265/5265 points
Z3 = Lean on
5265/5265 points
electrical.coax_lines: option not installed
-> NOT MET at every point; the heat
relation alone passes on 3595 points
(left of the dashed line)
0
20
40
60
80
100
120
140
160
flux lines n_{flux}
flux lines n_{flux}
flux lines n_{flux}
Requirements met / satisfiable
Need more information / pending information
Does not meet requirements / conflict
analytic boundary of the model equation (overlay)
Krinner et al. design: 58 drive, 50 flux