
产品系列 »»

SERIES INTRODUCTION



无氟 低噪音 高效能 变 频 转子式

W 系列 SERIES

适用于通讯户外柜电池仓空调、便携式空调及车载冰箱等用途

采用环保型制冷剂R134a、R1234yf、R290

直流12v~48v 全覆盖

一体化机架机构（专利技术，荣获国家家电科技进步一等奖）使之更加高效、静音

配套高度集成的一体化线束（专利技术）明星产品

Applicable to battery bin cooling, portable ACs, and car refrigerators.

Uses environmentally friendly refrigerants, such as R134a, R1234yf. ,R290.

Full coverage of DC power from 12V to 48V.

The system's enhanced efficiency and low-noise performance are ensured by its patented， highly integrated unitized structure– a technology honored with the National First Prize for Household Electrical Appliances Science & Technology Progress.

Equipped with a highly-integrated unitized cable (patented technology), which serves as a star component



无氟 高效能 低振动 变 频 转子式

S 系列 SERIES

适用于机柜空调、小型干衣机、帐篷空调等用途

采用环保型制冷剂 R134a、R290、R1234yf

结构紧凑,体积小重量轻,低振静音

全系列变频产品，覆盖交流、直流多电压输入

Applicable to cabinet ACs, compact dryers, tent ACs.

Uses environmentally friendly refrigerants R134a， R290 & R1234yf.

Compact structure with small size and light weight, low vibration, and quiet operation.

The full series of inverter products covers both AC and DC multi-voltage input.



无氟 转子式 低噪音 高效能 变 频

A 系列 SERIES

适用于 5-30L 的除湿机和小 1-1.5HP 变频空调

采用环保型制冷剂 R134a、R410A、R290、R32

结构紧凑，体积小重量轻，高效节能可靠

多种电源规格可选，含定速和变频

兼有干衣机、机柜空调等特殊领域用压缩机


Applicable to 5-30L dehumidifiers and inverter ACs ranging from sub-1 to1.5HP.

Uses environmentally friendly refrigerants, such as R134a, R410A, R290 & R32.

Compact structure with small size and light weight. High-performance, energy-efficient and reliable.

Available in multiple power specifications, including fixed-speed and inverter types.

Also includes compressors for specialized applications such as dryers, cabinet ACs.



无氟 低噪音 高效能 变 频

D 系列 SERIES

适用空调：定速小1-1.5HP，变频 1HP-3HP

单双转子兼备

采用环保型制冷剂 R410A、R32、R454B、R290 产品型谱齐全，适合多领域应用

性能和噪音水平行业领先

Applicable to fixed-speed ACs sub-1 to 1.5HP and inverter ACs （1HP to 3 HP）

Both single-rotary and twin-rotary compressors are available.

Uses environmentally friendly refrigerants R410A, R32, R454B & R290.

Features a comprehensive product portfolio suitable for a wide range of applications.

Sets the industry standard for performance and low noise.



无氟 低噪音 高效能 变 频

X 系列 SERIES

适用空调：变频小1HP-2HP

单双转子兼备

采用环保制冷剂 R410A、R32、R454B、R290


满足中国、日本、印度、欧洲、东南亚空调新能效标准，高效、节能、静音、环保

Applicable to inverter ACs from sub-1HP to 2HP.

Both single-rotary and twin-rotary compressors are available.

Uses environmentally friendly refrigerants R410a, R32, R454B & R290.

Complies with the latest energy efficiency standards for air conditioners in China, Japan, India, Europe, and Southeast Asia. High-performance, energy-efficient, low-noise and environmentally friendly .



无氟 低噪音 高效能 变 频

G 系列 SERIES

适用空调：定速 1-1.5HP，变频 2HP-6HP

采用 R410A、R290、R32 等多种制冷剂

多种电源规格可选，产品型谱齐全

高效节能可靠

Applicable to fixed-speed ACs (1HP-1.5HP) and inverter ACs (2HP-6HP).

Uses various refrigerants, such as R410A, R290 & R32.

Available in multiple power specifications with a complete product portfolio.

High-performance, energy-efficient, and reliable.

L 系列 SERIES



无氟 低噪音 高效能
变 频 双转子

适用空调：定速 1.5HP-3HP，变频 2.5HP-5HP

采用R410A、R290、R32 等多种制冷剂

多种电源规格可选，适用于T1,T3工况，产品型谱丰富

变频采用 R410A 和 R32，双转子结构，
高效环保振动小

Applicable to fixed-speed ACs (1.5-3HP) and inverter ACs (2.5-5HP).


Uses various refrigerants, such as R410A, R290 & R32.

Available in multiple power specifications.

Suitable for both T1 and T3 conditions, with a comprehensive product portfolio.

Inverter models, which use R410A or R32 and feature twin-rotary technology, offer high energy efficiency, environmental friendliness, and low vibration.

H 系列 SERIES



无氟 低噪音 高效能
变 频 冷 冻

适用空调：定速 2-3HP

采用 R410A、R290、R32 等多种制冷剂

多种电源规格可选

适用于 T1，T3 工况，产品型谱丰富


Applicable to fixed-speed ACs (2-3HP).

Uses various refrigerants, such as R410A, R290 & R32.

Available in multiple power specifications.

Suitable for both T1 and T3 conditions, with a wide and diverse product portfolio.

TH 系列 SERIES



无氟 低噪音 高效能
变 频 冷 冻 双转子

适用空调: 定速 3-6HP, 变频 4-12HP 家用和商用

采用R22、R410A、R32、R290、R454B等多种制冷剂

多种电源规格可选

出油率低，高效节能可靠

Applicable to fixed-speed ACs (3-6HP) and inverter RACs (Room Air Conditioners) and PACs (Light Commercial Packaged Air Conditioners) in the 4-12HP range.

Uses various refrigerants, such as R22, R410A, R32, R290 & R454B.

Available in multiple power specifications.

Low-OCR, high-performance, energy-efficient, and reliable.

TE 系列 SERIES



无氟 低噪音 高效能
变 频 双转子

国内首家大功率的25HP 双转子压缩机

适用于定速5-7HP及变频12-25HP的家用
和商用空调

采用R410A、R32 、R454B等多种制冷剂

兼有三相电源及多国家 / 地区多种电源，超高能效

The first twin rotary compressors with 25HP capacity in the domestic market.

Applicable to RACs (Room Air Conditioners) and PACs (Light Commercial Packaged Air Conditioners) uses with fixed-speed ACs (5HP to 7HP) and inverter ACs (12HP to 25HP).


Uses various refrigerants such as R22, R410A, R32 & R454B.

Available in three-phase power configurations, supporting various power specifications for multiple countries and regions, with ultra-high energy efficiency.


压缩机规格分布图 »»

COMPRESSOR SPECIFICATIONS DISTRIBUTION CHART


变频机 INVERTER

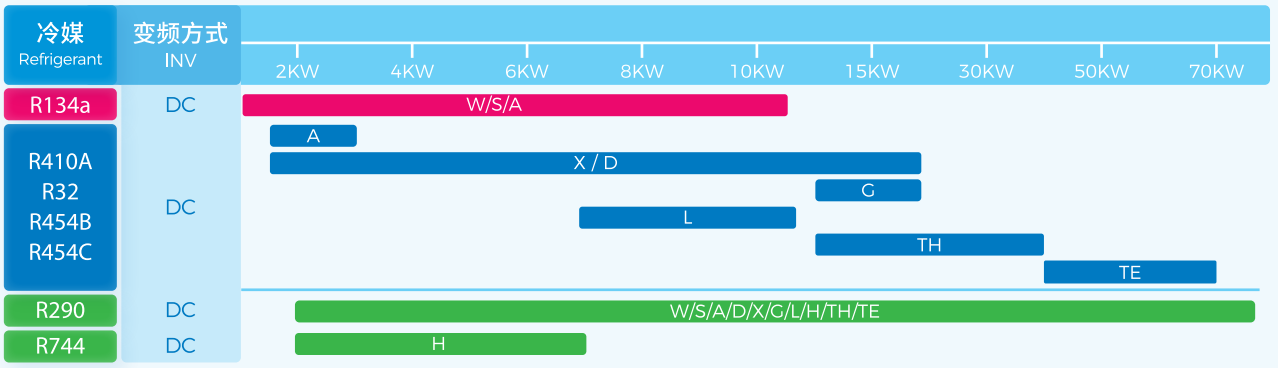

定速机 CONSTANT-SPEED

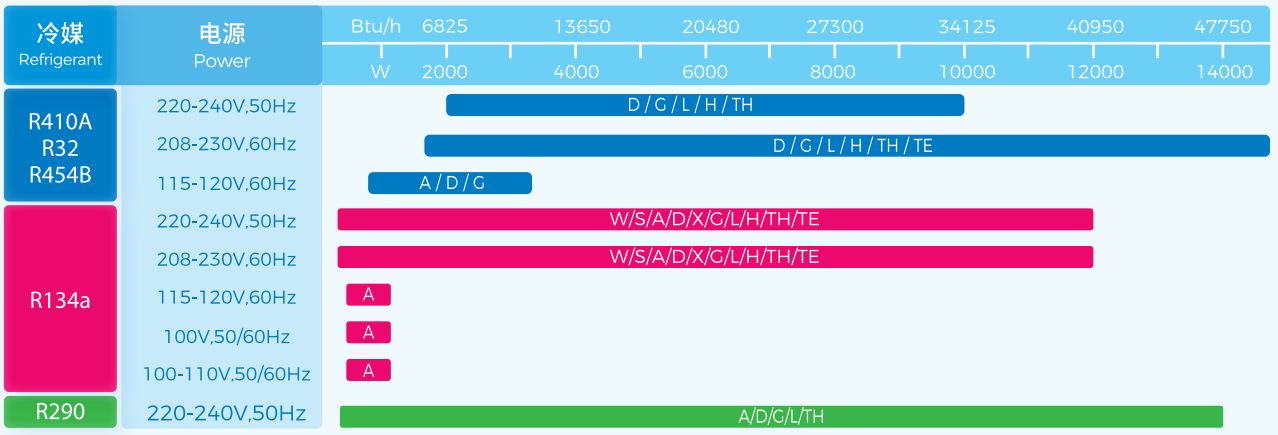

热带机 TROPICAL

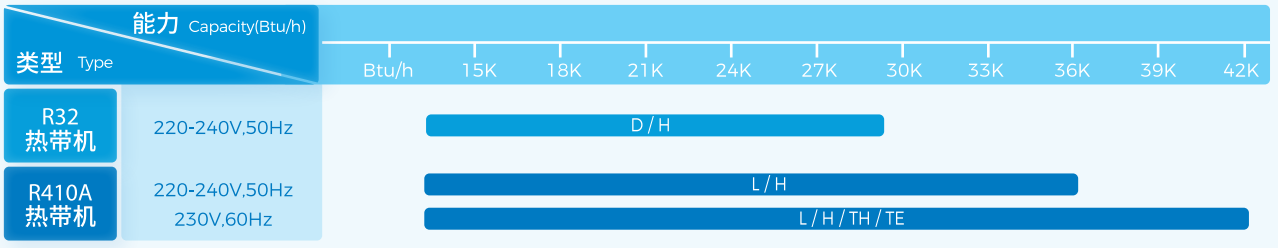

压缩机编号方法 MODEL CODE IDENTIFICATION

例 Example: A S L 145 S V - C 7A U **

制冷剂和用途 Refrigerant & Use

气缸数 Numberof Cylinder

系列 Series

排气量 Displacement

特殊规格辅助标示 Auxiliary mark for special specification

底角与储液器夹角 Angle between triangle base and accumulator

储液器规格 Accumulator specifications

底脚形式 Compressors Base Type

压缩机性能等级 Compressors Performance Scale	
C	标准型 COMMON COP models
S	高效型 SUPER COP models
X/T	超高效型 ULTRA COP models
G	低电压启动型 Low voltage starting models
M	无喷射热带机 None injection tropical models
D	超级无喷射热带机 Super none injection tropical models

电源 Power	
R	单相 Single phase ,100V/100-110V,50/60Hz
W	单相 Single phase ,110/115-120V,60Hz
S	单相 Single phase ,200V/200-220V,50/60Hz
N	单相 Single phase ,208-230V,60Hz
V	单相 Single phase , 220V/220-240V,50Hz
G	单相 Single phase ,220V,60Hz
T	单相 Single phase ,230V,50/60Hz
H	单相 Single phase ,265-277V,60Hz
C	三相 Three phase ,380-400V,50/60Hz
F/P	直流变频(铁氧体)DC INV(Ferrite)
D/K	直流变频(稀土)DC INV(Rare Earth)

启动方式 Starting Method	
-	KP (1)
1	KT (1)
2	KR (1)
3	K (3)
4	KQ (1)
5	KN (1)

压缩机编号方法 MODEL CODE IDENTIFICATION

例 Example: SH V 33 Y C 1 - E

系列 Series

名义输出功率 Rated Output

特殊规格 Special Specification

三角底角度φ Angle φ of Triangle Base

启动方式 Starting Method 电源 Power（1PH）	
13	100V,50/60Hz, 1PH
23	200V,50/60Hz, 1PH
33	220~240V,50Hz, 1PH
53	110~120V,60Hz, 1PH
55	PTC启动 PTC Motor Starting Method,115v,60Hz
73	208~230V,60Hz, 1PH
83	220V,60Hz, 1PH
20	变频用 For Inverter
40	380V,3PH

排气量 Displacement

储液器规格 Accumulator specifications

底脚形式 Compressors Base Type

■ 家用空调压缩机 ROOM AC COMPRESSOR

压缩机测试工况/ TESTING CONDITION

测试工况 Testing Condition	冷凝温度 Condensing Temp (°C)	蒸发温度 Evaporating Temp (°C)	过冷温度 Subcooling Temp(°C)	过热温度 Superheating Temp (°C)	环境温度 Ambient Temp (°C)
ASHRAE/T	54.4	7.2	8.3	11.1	35.0
冷房定格 Rated Cooling	45.0	7.2	8.3	11.1	35.0
New GB	46.0	7.2	8.3	11.1	35.0
DOE B	37.8	10.0	8.3	11.1	35.0

直流变频 R290/ DC INVERTER R290

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	额定转速 Rated Speed (rpm)	压缩机高度 Height (mm)	测试工况 Testing Condition
D	PSD140RKQ-6B	14.00	2810	9588	4.75	3600	235.0	New GB
TA	PTA176RKR-8B	17.50	3610	12317	4.87	3600	228.5	New GB
TD	PTD175RKQ-6B	17.50	3650	12454	4.93	3600	240.9	New GB
TX	GTX210UKT-8	21.00	4400	15013	4.95	3600	264.0	New GB
L	PTL232SDN	23.20	3850	13136	3.50	3300	290.5	ASHRAE/T
	PTL253UDP	25.30	4260	14535	3.61	3300	290.5	ASHRAE/T

直流变频 R410A T3/ DC INVERTER R410A T3

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	额定转速 Rated Speed (rpm)	压缩机高度 Height (mm)	测试工况 Testing Condition
D	GSD140RK-8B	14.00	5000	17060	4.50	3600	235.5	New GB
	GTD141RK-8B	14.10	5060	17265	4.42	3600	242.2	New GB
	GTD186RK-8	18.60	6400	21837	4.40	3600	259.6	New GB
L	ATL232UDP-T	23.20	6520	22247	3.20	3300	307.5	ASHRAE/T
TH	GTH307SKP	30.70	9280	31664	4.20	3300	328.0	New GB
	GTH420SKP	42.00	11800	40263	3.30	3300	328.0	ASHRAE/T

直流变频 R32/R410A/ DC INVERTER R32/R410A

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	额定转速 Rated Speed (rpm)	压缩机高度 Height (mm)	测试工况 Testing Condition
A	GSA725SKS-8	7.25	2645	9025	4.40	3600	194.6	New GB
TA	GTA920SKR-8A	9.20	3180	10850	4.32	3600	218.5	New GB
	GTA100SKS-8B	10.00	3510	11976	4.32	3600	218.5	New GB
X	GSX073NKQ-8	7.30	2650	9042	4.34	3600	192.2	New GB
	GSX073CKT-8	7.30	2620	8939	4.40	3600	190.2	New GB
	GSX088BKQ-8	8.80	3155	10765	4.42	3600	190.2	New GB
	GSX088RKU-8	8.80	3210	10953	4.61	3600	225.0	New GB
	GSX098BKS-9	9.80	3595	12266	4.47	3600	227.1	New GB
	GSX102BKS-9	10.20	3790	12931	4.47	3600	227.0	New GB
	GSX102CKS-9	10.20	3800	12966	4.56	3600	227.0	New GB
	GSX102UKU-8	10.20	3800	12966	4.60	3600	225.0	New GB
TX	GTX100SKT-8A	10.00	3570	12181	4.35	3600	240.2	New GB
	GTX130SKT-8A	13.00	4635	15815	4.35	3600	240.2	New GB
	GTX150SKT-8A	15.00	5370	18322	4.35	3600	240.2	New GB
D	GSD098CKN-5B	9.80	3510	11976	4.26	3600	208.9	New GB
	GSD098RKT-8B	9.80	3485	11891	4.58	3600	229.0	New GB
	GSD098XKU-6B	9.80	3485	11891	4.63	3600	229.0	New GB
	GSD102CKQ-8B	10.20	3710	12659	4.45	3600	208.9	New GB
	GSD108CKQ-8B	10.80	3870	13204	4.43	3600	208.9	New GB
	GSD130SKR-8B	13.00	4590	15661	4.45	3600	226.5	New GB
	GSD140RKQ-8B	14.00	5050	17231	4.50	3600	244.9	New GB
	GSD140SKQ-8B	14.00	5010	17094	4.45	3600	253.0	New GB
	GSD145RKR-8	14.50	5290	18049	4.50	3600	235.5	New GB
TD	GTD130UKS-8B	13.00	4635	15815	4.48	3600	263.0	New GB
	GTD150RKQ-6B	15.00	5380	18357	4.46	3600	266.0	New GB
	GTD150RKR-8B	15.00	5380	18357	4.43	3600	264.0	New GB
	GTD186RKQ-8	18.60	6750	23031	4.45	3600	291.0	New GB
	GTD216XKS-8	21.60	7630	26034	4.60	3600	308.0	New GB
	GTD216UKP-8B	21.60	7820	26682	4.50	3600	274.0	New GB
	GTD226RKQ-8	22.60	8210	28013	4.47	3600	291.0	New GB
G	GSG133SKQ	13.30	5500	18766	4.65	4020	261.0	冷房定格 Rated Cooling
L	GTL253UDP	25.30	8420	28729	4.85	3180	290.5	冷房定格 Rated Cooling
TH	GTH307SKP	30.70	9870	33676	4.30	3300	328.0	New GB
	GTH420SKP	42.00	13700	46744	4.30	3300	328.0	New GB
	GTH420SDP	42.00	16000	54592	4.40	4020	375.8	冷房定格 Rated Cooling

定速 T3 R410A/ CONSTANT-SPEED T3 R410A

[1φ]220-240V 50Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
G	ASG108MV	10.80	2555	8718	2.85	30/450	261.0	ASHRAE/T
	ASG130MV-3	13.00	3080	10509	2.92	30/450	261.0	ASHRAE/T
	ASG135MV	13.50	3320	11328	3.02	35/450	261.0	ASHRAE/T
	ASG140MV-3	14.00	3409	11632	2.94	35/450	268.3	ASHRAE/T
L	ASL175MV-7	17.50	4715	16088	3.95	40/450	302.0	ASHRAE/T
	ASL180MV	18.00	4870	16616	3.97	50/450	302.0	New GB
	ASL185MV-6	18.50	5010	17094	3.98	45/450	302.0	ASHRAE/T
	ASL205MV-G	20.50	5600	19107	3.91	70/450	302.0	ASHRAE/T
H	ASH210MV	21.00	5200	17742	3.06	55/450	301.1	ASHRAE/T
	ASH232MV-2	23.20	5750	19619	3.09	60/450	301.1	ASHRAE/T
	ASH244MV-1	24.40	6630	22622	4.02	55/450	315.5	New GB
	ASH250MV-2	25.00	6750	23031	3.79	60/450	315.5	New GB
	ASH264MV-2	26.40	7230	24669	3.92	60/450	325.5	New GB
	ASH280MV	28.00	6850	23372	3.00	50/450	325.5	ASHRAE/T
TH	ATH290MV	29.00	7010	23918	3.03	70/450	375.8	ASHRAE/T
	ATH325MV	32.50	7860	26818	2.98	70/450	375.8	ASHRAE/T
	ATH356MV	35.60	8550	29173	2.90	55/450	375.8	ASHRAE/T
	ATH420MV	42.00	10100	34461	2.95	90/450	375.8	ASHRAE/T

定速 T3 R410A/ CONSTANT-SPEED T3 R410A

[3φ]380V 50Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
H	ASH286UC	28.60	6830	23304	3.05	-	315.5	ASHRAE/T
TH	ATH280TC	28.00	6750	23031	2.92	-	351.4	ASHRAE/T
	ATH307UC3	30.70	7490	25556	3.08	-	375.8	ASHRAE/T
	GTH345UC	34.50	9140	31186	4.03	-	400.7	New GB
	ATH420UC*1	41.80	9880	33711	3.01	-	400.7	ASHRAE/T
	ATH489UC	48.60	13150	44868	3.98	-	427.8	New GB

定速 T3 R410A/ CONSTANT-SPEED T3 R410A

[1φ]230V 60Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
G	ASG102DG-3	10.20	3010	10270	3.02	30/450	261.0	ASHRAE/T
	ASG108DG-1	10.80	3205	10935	3.02	30/450	261.0	ASHRAE/T
L	ASL145DG-1	14.50	4747	16197	4.03	40/450	287.0	New GB
	ASL157DG	15.70	5130	17504	3.98	40/450	287.0	New GB
	ASL160DG-6	16.00	5205	17759	3.91	45/450	287.0	New GB
	ASL170DG-7	17.00	5555	18954	3.90	50/450	302.0	New GB
	ASL180DG-6	18.00	5910	20165	3.97	40/450	302.0	New GB
	ASL185DG	18.50	6085	20762	4.05	40/450	302.0	New GB
	ASL193DG	19.30	6450	22007	4.05	40/450	302.0	New GB
	ASL201DG	20.10	600	22519	4.01	60/450	314.0	New GB
	ASL203DG	20.50	6750	23031	4.01	50/450	304.0	New GB
H	ASH201DG-3	20.10	6610	22553	4.01	50/450	301.1	New GB
	ASH205DG-3	20.50	6700	22860	3.90	55/450	301.1	New GB
	ASH210DG	21.00	6820	23270	4.04	40/450	301.1	New GB
	ASH215DG	21.50	6410	21871	3.08	50/450	301.1	ASHRAE/T
	ASH232DG	23.20	6870	23440	3.10	55/450	325.5	ASHRAE/T
	ASH239DG	23.90	7830	26716	4.08	55/450	315.5	New GB
	ASH250DG	25.00	7410	25283	3.06	60/450	315.5	ASHRAE/T
	ASH255DG-1	25.50	7520	25658	3.03	60/450	325.5	ASHRAE/T
	ASH264DG	26.40	7830	26716	3.05	70/450	325.5	ASHRAE/T
	ASH280DG	28.00	8210	28013	3.05	70/450	325.5	ASHRAE/T
TH	ATH280DG-1	28.00	8280	28251	2.99	70/450	375.8	ASHRAE/T
	ATH290DG-1	29.00	8570	29241	3.01	70/450	375.8	ASHRAE/T
	ATH307DG	30.70	9050	30879	3.01	70/450	375.8	ASHRAE/T

定速 T1 R410A/ CONSTANT-SPEED T1 R410A

[1φ]115-120V 60Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
D	ASD082UW-2	8.20	2355	8035	2.90	50/250	241.8	ASHRAE/T
	GSD102UW-3	10.20	2960	10100	3.05	70/300	248.8	ASHRAE/T
G	ASG125UW	12.50	3575	12198	2.93	65/300	261.0	ASHRAE/T

定速 T1 R410A/ CONSTANT-SPEED T1 R410A

[3φ]380V 50Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
H	ASH286UC	28.60	6830	23304	3.05	-	315.5	ASHRAE/T
TH	ATH280TC	28.00	6750	23031	2.92	-	351.4	ASHRAE/T
	ATH307UC3	30.70	7490	25556	3.08	-	375.8	ASHRAE/T
	GTH345UC	34.50	9140	31186	4.03	-	400.7	New GB
	ATH420UC	42.00	10150	34632	3.03	-	375.8	ASHRAE/T

定速 T1 R410A/ CONSTANT-SPEED T1 R410A

[1φ]220V 50Hz（低电压 Low Voltage）

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
G	ASG096GV	9.60	2355	8035	2.83	35/450	261.0	ASHRAE/T
	ASG108GV	10.80	2610	8905	2.84	35/450	261.0	ASHRAE/T
	ASG130GV	13.00	3170	10816	2.83	35/450	261.0	ASHRAE/T
L	ASL145GV	14.50	3500	11942	2.82	40/450	289.0	ASHRAE/T
	ASL198GV	19.80	4755	16224	2.78	60/450	304.0	ASHRAE/T
H	ASH210GV	21.00	5230	17845	2.99	55/450	301.1	ASHRAE/T
	ASH232GV	23.20	5740	19585	3.01	60/450	315.5	ASHRAE/T
	ASH264GV	26.40	7360	25112	3.71	60/450	315.5	New GB
	ATH290GV	29.00	7060	24089	2.98	60/450	358.0	ASHRAE/T

定速 T1 R410A/ CONSTANT-SPEED T1 R410A

[1φ]220-240V 50Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
D	ASD042SV	4.20	940	3207	2.65	8/450	217.8	ASHRAE/T
	ASD063SV	6.30	1460	4982	2.72	17/400	238.8	ASHRAE/T
	ASD073CV-4	7.30	1955	6670	3.52	25/450	229.1	New GB
	GSD080CV-5B	8.00	2090	7131	3.49	35/450	249.1	New GB
	GSD101SV-4B	10.10	2400	8189	2.80	25/450	239.1	ASHRAE/T
	ASD105UV-3	10.5	2780	9485	3.92	30/450	248.8	New GB
	GSD105CV-5B	10.50	2770	9451	3.37	35/450	249.1	New GB
	ASD118UV-3B	11.80	3150	10748	3.92	25/450	249.1	New GB
	GSD125CV-5B	12.50	3335	11379	3.35	45/450	249.1	New GB
G	ASG102UV	10.20	2450	8359	3.02	30/450	261.0	ASHRAE/T
	ASG108TV	10.80	2510	8564	2.90	25/450	261.0	ASHRAE/T
	ASG120TV-3	12.00	3290	11226	3.96	30/450	261.0	New GB
	ASG125UV-3	12.50	2930	9997	2.93	30/450	261.0	ASHRAE/T
	ASG130CV-4	13.00	3509	11973	3.66	40/450	261.0	New GB
	ASG135CV-4	13.50	3245	11072	2.88	40/450	261.0	ASHRAE/T
	ASG140TV-3	14.00	3380	11533	3.02	30/450	278.6	ASHRAE/T
	ASG140CV-5	14.00	3800	12966	3.44	45/450	268.3	New GB
L	ASL150UV-1	15.00	3555	12130	3.00	35/450	289.0	ASHRAE/T
	ASL160UV	16.00	3780	12897	3.00	35/450	289.0	ASHRAE/T
	ASL180UV	18.00	4350	14842	3.03	35/450	304.0	ASHRAE/T
	ASL185UV	18.50	4440	15149	2.98	40/450	289.0	ASHRAE/T
	ASL211SV-1	21.10	5085	17350	2.90	50/450	289.0	ASHRAE/T
	ASL222SV	22.20	5310	18118	2.95	55/450	304.0	ASHRAE/T
	ASL242SV	24.20	5820	19858	2.87	60/450	308.7	ASHRAE/T
H	ASH197UV	19.70	5300	16139	4.01	45/450	296.1	ASHRAE/T
	ASH232SV	23.20	5510	18800	2.90	60/400	298.5	ASHRAE/T
	ASH244UV-2	24.40	5945	20284	3.03	55/450	315.5	ASHRAE/T
	ASH250UV	25.00	6035	20591	3.01	55/450	325.5	ASHRAE/T
	ASH255UV	25.50	6210	21189	3.00	55/450	325.5	ASHRAE/T
	ASH264UV	26.40	6440	21973	3.00	55/450	325.5	ASHRAE/T
	ASH280TV	28.00	6830	23304	3.00	70/450	312.9	ASHRAE/T
	ASH286UV-1	28.60	8650	29514	4.45	70/450	315.5	New GB
	ASH295UV	29.50	7200	24566	3.00	70/450	325.5	ASHRAE/T
TH	ATH290TV	29.00	7130	24328	2.98	45/450	364.0	ASHRAE/T
	ATH290CV	29.00	7125	24311	2.88	60/450	358.0	ASHRAE/T
	ATH307RV	30.70	7330	25010	2.90	50/450	358.0	ASHRAE/T
	ATH325CV	32.50	7780	26545	2.87	60/450	358.0	ASHRAE/T
	ATH356CV	35.60	8440	28797	2.85	65/450	358.0	ASHRAE/T
	ATH420MV	41.80	10060	34325	2.90	90/450	375.8	ASHRAE/T

定速 T1 R410A/ CONSTANT-SPEED T1 R410A

[1φ]208-230V 60Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
D	ASD071UN	7.10	2085	7114	2.90	17/400	243.8	ASHRAE/T
	ASD084SN	8.40	2470	8428	2.85	20/400	248.8	ASHRAE/T
	ASD102XN	10.20	2990	10202	2.99	20/450	251.0	ASHRAE/T
	ASD113UN	11.30	3330	11362	3.00	20/450	251.0	ASHRAE/T
G	ASG112UN	11.20	3305	11277	3.05	30/450	261.0	ASHRAE/T
L	ASL152DN-6	15.20	5010	17094	4.03	45/450	287.0	New GB
	GSL157CN-5	15.70	5175	17657	3.79	35/450	302.0	New GB
	ASL180DN-6	18.00	5900	20131	4.03	40/450	302.0	New GB
	ASL190DN-6	19.00	6250	21325	4.02	40/450	302.0	New GB
	ASL211SN-1	21.10	6220	21223	2.95	35/450	314.0	ASHRAE/T
	ASL215CN-4	21.50	6360	21700	3.82	60/450	304.0	New GB
	ASL222UN	22.20	6566	22403	3.04	50/450	314.0	ASHRAE/T
TL	ATL245DG	24.50	7250	24737	3.00	45/450	337.5	ASHRAE/T
H	ASH201DG-3	20.10	6610	22553	4.01	50/450	301.1	New GB
	ASH205DG-3	20.50	6700	22860	3.90	55/450	301.1	New GB
	ASH210DG	21.00	6820	23270	4.04	40/450	301.1	New GB
	ASH215DG	21.50	6410	21871	3.08	50/450	301.1	ASHRAE/T
	ASH222UN	22.20	6550	22349	3.08	55/450	315.5	ASHRAE/T
	ASH232UN	23.20	6750	23031	3.05	55/400	315.5	ASHRAE/T
	ASH239DG	23.90	7830	26716	4.08	55/450	315.5	New GB
	ASH250DG	25.00	7410	25283	3.06	60/450	315.5	ASHRAE/T
	ASH255DG-1	25.50	7520	25658	3.03	60/450	325.5	ASHRAE/T
	ASH264DG	26.40	7830	26716	3.05	70/450	325.5	ASHRAE/T
	ASH280DG	28.00	8210	28013	3.05	70/450	325.5	ASHRAE/T
TH	ATH280DG-1	28.00	8280	28251	2.99	70/450	375.8	ASHRAE/T
	ATH290DG-1	29.00	8570	29241	3.01	70/450	375.8	ASHRAE/T
	ATH307DG	30.70	9050	30879	3.01	70/450	375.8	ASHRAE/T
	ATH356UN	35.60	10520	35894	2.95	90/450	375.8	ASHRAE/T

定速 R290/ CONSTANT-SPEED R290

[1φ]220-240V 50Hz

系列 Series	机种 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
A	PSA325SV	3.25	445	1518	2.40	6.5/450	164.1	ASHRAE/T
	PSA357SV	3.57	495	1689	2.50	6.5/450	164.1	ASHRAE/T
	PSA520SV	5.20	722	2463	2.50	8.0/450	164.1	ASHRAE/T
	PSA586SV	5.86	835	2849	2.64	6.5/500	174.6	ASHRAE/T
	PSA645CV-4	6.45	945	3224	2.65	12/450	185.1	ASHRAE/T
	PSA725CV-5	7.25	1060	3617	2.60	12/450	185.1	ASHRAE/T
	PSA725SV	7.25	1060	3617	2.83	12/450	185.1	ASHRAE/T
	PSA804SV	8.04	1150	3924	2.43	20/450	180.9	ASHRAE/T
D	PSD089CV	8.90	1350	4606	3.25	20/450	232.9	ASHRAE/T
	PSD125XV	12.50	1970	6722	3.35	17/400	229.5	ASHRAE/T
	PSD160XV	16.00	2500	8530	3.35	25/450	242.9	ASHRAE/T
	PSD160SV-3	16.00	2410	8223	3.21	25/450	224	ASHRAE/T
	PSD170XV	17.00	2665	9093	3.35	25/450	238.4	ASHRAE/T
G	PSG184SV	18.40	2653	9052	3.27	35/400	263.3	ASHRAE/T
L	PSL242UV	24.20	3680	12556	3.46	35/450	289.0	ASHRAE/T

定速 R32/ CONSTANT-SPEED R32

[1φ] 115-120V/60Hz

系列 Series	机种 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
D	GSD102UW-3	10.20	3495	11925	4.01	70/300	251.0	New GB
	GSD108UW-3B	10.80	3755	12812	3.95	70/300	251.0	New GB

定速 R32/ CONSTANT-SPEED R32

[1φ] 230V/60Hz

系列 Series	机种 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
L	GSL152DG-6	15.20	5380	18357	4.09	40/450	302.0	New GB
	GSL157DG-6	15.70	5610	19141	4.07	45/450	287.0	New GB
	GSL160DG-7	16.00	5685	19397	4.15	35/450	302.0	New GB
	GSL193DG-7	19.30	6930	23645	4.15	40/450	302.0	New GB
	GSL203CG-5	20.30	7270	24805	3.9	35/450	302.0	New GB

定速 R32/ CONSTANT-SPEED R32

[1ϕ]220-240V 50Hz

系列 Series	型号 Model	排气量 Displace-ment (cc/rev)	制冷量 Cooling Capacity (W)	制冷量 Cooling Capacity (Btu/h)	COP (W/W)	电容 Capcitor (μF/v)	压缩机高度 Height (mm)	测试工况 Testing Condition
A	GSA418HV	4.18	1280	4367	4.08	10/450	198.7	冷房定格 Rated Cooling
D	GSD042SV	4.20	1260	4299	4.06	8/450	217.8	冷房定格 Rated Cooling
	GSD070CV-5B	7.00	1970	6722	3.63	20/450	225.5	New GB
	ASD073CV-4	7.30	2060	7029	3.60	25/450	229.1	New GB
	GSD080CV-5B	8.00	2180	7438	3.50	35/450	249.1	New GB
	GSD080CV-4B	8.00	2620	8939	4.29	30/450	229.1	冷房定格 Rated Cooling
	GSD085SV-4B	8.50	2385	8138	3.85	25/450	239.1	New GB
	GSD088CV-4B	8.80	2785	9502	4.29	30/450	229.1	冷房定格 Rated Cooling
	GSD088SV-4B	8.80	2809	9584	4.35	25/450	239.1	冷房定格 Rated Cooling
	GSD101SV-4B	10.10	2880	9827	3.88	25/450	239.1	New GB
	GSD105CV-5B	10.50	2960	10100	3.45	35/450	249.1	New GB
	GSD113CV	11.30	3610	12317	4.34	35/450	235.1	冷房定格 Rated Cooling
	ASD118UV-3B	11.80	3320	11328	3.92	25/450	249.1	New GB
	GSD125CV-5B	12.50	3550	12113	3.41	45/450	249.1	New GB
G	GSG102UV	10.20	3200	10918	4.55	30/450	261.0	冷房定格 Rated Cooling
	GSG108TV-3	10.80	3550	12113	4.68	30/450	261.0	冷房定格 Rated Cooling
	GSG120UV-3	12.00	3903	13317	4.63	30/450	261.0	冷房定格 Rated Cooling
	GSG125SV-4	12.50	4040	13784	4.42	40/450	261.0	冷房定格 Rated Cooling
	GSG125MV	12.50	3665	12505	3.96	35/450	261.0	New GB
	GSG135TV	13.50	4430	15115	4.65	35/450	261.0	冷房定格 Rated Cooling
L	GSL175CV-5	17.50	5050	17231	3.84	35/450	302.0	New GB
	GSL180MV-7	18.00	5325	18169	4.08	45/450	302.0	New GB
	GSL193MV-7	19.30	5640	19244	4.06	45/450	302.0	New GB
	GSL210CV-4	21.00	6210	21189	3.86	60/450	304.0	New GB
	GSL222MV-7	22.20	6560	22383	3.99	60/450	304.0	New GB
	GSL232UV-7	23.20	6950	23713	4.06	60/450	304.0	New GB
	GSL236CV-4	23.60	7015	23935	3.9	60/450	304.0	New GB
H	GSH190TV	19.00	6180	21086	4.72	45/450	316.2	冷房定格 Rated Cooling
	ASH197UV	19.70	5796	19776	4.09	45/450	301.1	New GB
	GSH201TV	20.10	6630	22622	4.85	40/450	301.1	冷房定格 Rated Cooling
	GSH205UV	20.50	5980	20404	4.07	45/450	296.1	New GB
	GSH244UV-1	24.40	7060	24089	4.09	50/450	315.5	New GB
	ASH255UV	25.50	7570	25829	4.17	55/450	325.5	New GB
	GSH264UV	26.40	7710	26307	3.99	55/450	325.5	New GB
TH	GTH270UV	27.00	8690	29650	4.63	60/450	378.5	冷房定格 Rated Cooling
	GTH290UV	29.00	9400	32073	4.68	70/450	375.8	冷房定格 Rated Cooling
	GTH315UV	31.50	10175	34717	4.58	70/450	375.8	冷房定格 Rated Cooling
	ATH345MV	31.50	9925	33864	3.83	70/450	378.4	冷房定格 Rated Cooling