
产品系列 »»

SERIES INTRODUCTION



无氟 低噪音 高效能 变 频 转子式

W 系列 SERIES

适用于通讯户外柜电池仓空调、便携式空调及车载冰箱等用途

采用环保型制冷剂R134a、R1234yf、R290

直流12v~48v 全覆盖

一体化机架机构（专利技术，荣获国家家电科技进步一等奖）使之更加高效、静音

配套高度集成的一体化线束（专利技术）明星产品

Applicable to battery bin cooling, portable ACs, and car refrigerators.

Uses environmentally friendly refrigerants, such as R134a, R1234yf. ,R290.

Full coverage of DC power from 12V to 48V.

The system's enhanced efficiency and low-noise performance are ensured by its patented， highly integrated unitized structure– a technology honored with the National First Prize for Household Electrical Appliances Science & Technology Progress.

Equipped with a highly-integrated unitized cable (patented technology), which serves as a star component



无氟 高效能 低振动 变 频 转子式

S 系列 SERIES

适用于机柜空调、小型干衣机、帐篷空调等用途

采用环保型制冷剂 R134a、R290、R1234yf

结构紧凑,体积小重量轻,低振静音

全系列变频产品，覆盖交流、直流多电压输入

Applicable to cabinet ACs, compact dryers, tent ACs.

Uses environmentally friendly refrigerants R134a， R290 & R1234yf.

Compact structure with small size and light weight, low vibration, and quiet operation.

The full series of inverter products covers both AC and DC multi-voltage input.



无氟 转子式 低噪音 高效能 变 频

A 系列 SERIES

适用于 5-30L 的除湿机和小 1-1.5HP 变频空调

采用环保型制冷剂 R134a、R410A、R290、R32

结构紧凑，体积小重量轻，高效节能可靠

多种电源规格可选，含定速和变频

兼有干衣机、机柜空调等特殊领域用压缩机


Applicable to 5-30L dehumidifiers and inverter ACs ranging from sub-1 to1.5HP.

Uses environmentally friendly refrigerants, such as R134a, R410A, R290 & R32.

Compact structure with small size and light weight. High-performance, energy-efficient and reliable.

Available in multiple power specifications, including fixed-speed and inverter types.

Also includes compressors for specialized applications such as dryers, cabinet ACs.



无氟 低噪音 高效能 变 频

D 系列 SERIES

适用空调：定速小1-1.5HP，变频 1HP-3HP

单双转子兼备

采用环保型制冷剂 R410A、R32、R454B、R290 产品型谱齐全，适合多领域应用

性能和噪音水平行业领先

Applicable to fixed-speed ACs sub-1 to 1.5HP and inverter ACs （1HP to 3 HP）

Both single-rotary and twin-rotary compressors are available.

Uses environmentally friendly refrigerants R410A, R32, R454B & R290.

Features a comprehensive product portfolio suitable for a wide range of applications.

Sets the industry standard for performance and low noise.



无氟 低噪音 高效能 变 频

X 系列 SERIES

适用空调：变频小1HP-2HP

单双转子兼备

采用环保制冷剂 R410A、R32、R454B、R290


满足中国、日本、印度、欧洲、东南亚空调新能效标准，高效、节能、静音、环保

Applicable to inverter ACs from sub-1HP to 2HP.

Both single-rotary and twin-rotary compressors are available.

Uses environmentally friendly refrigerants R410a, R32, R454B & R290.

Complies with the latest energy efficiency standards for air conditioners in China, Japan, India, Europe, and Southeast Asia. High-performance, energy-efficient, low-noise and environmentally friendly .



无氟 低噪音 高效能 变 频

G 系列 SERIES

适用空调：定速 1-1.5HP，变频 2HP-6HP

采用 R410A、R290、R32 等多种制冷剂

多种电源规格可选，产品型谱齐全

高效节能可靠

Applicable to fixed-speed ACs (1HP-1.5HP) and inverter ACs (2HP-6HP).

Uses various refrigerants, such as R410A, R290 & R32.

Available in multiple power specifications with a complete product portfolio.

High-performance, energy-efficient, and reliable.

L 系列 SERIES



无氟 低噪音 高效能
变 频 双转子

适用空调：定速 1.5HP-3HP，变频 2.5HP-5HP

采用R410A、R290、R32 等多种制冷剂

多种电源规格可选，适用于T1,T3工况，产品型谱丰富

变频采用 R410A 和 R32，双转子结构，
高效环保振动小

Applicable to fixed-speed ACs (1.5-3HP) and inverter ACs (2.5-5HP).


Uses various refrigerants, such as R410A, R290 & R32.

Available in multiple power specifications.

Suitable for both T1 and T3 conditions, with a comprehensive product portfolio.

Inverter models, which use R410A or R32 and feature twin-rotary technology, offer high energy efficiency, environmental friendliness, and low vibration.

H 系列 SERIES



无氟 低噪音 高效能
变 频 冷 冻

适用空调：定速 2-3HP

采用 R410A、R290、R32 等多种制冷剂

多种电源规格可选

适用于 T1，T3 工况，产品型谱丰富


Applicable to fixed-speed ACs (2-3HP).

Uses various refrigerants, such as R410A, R290 & R32.

Available in multiple power specifications.

Suitable for both T1 and T3 conditions, with a wide and diverse product portfolio.

TH 系列 SERIES



无氟 低噪音 高效能
变 频 冷 冻 双转子

适用空调: 定速 3-6HP, 变频 4-12HP 家用和商用

采用R22、R410A、R32、R290、R454B等多种制冷剂

多种电源规格可选

出油率低，高效节能可靠

Applicable to fixed-speed ACs (3-6HP) and inverter RACs (Room Air Conditioners) and PACs (Light Commercial Packaged Air Conditioners) in the 4-12HP range.

Uses various refrigerants, such as R22, R410A, R32, R290 & R454B.

Available in multiple power specifications.

Low-OCR, high-performance, energy-efficient, and reliable.

TE 系列 SERIES



无氟 低噪音 高效能
变 频 双转子

国内首家大功率的25HP 双转子压缩机

适用于定速5-7HP及变频12-25HP的家用
和商用空调

采用R410A、R32 、R454B等多种制冷剂

兼有三相电源及多国家 / 地区多种电源，超高能效

The first twin rotary compressors with 25HP capacity in the domestic market.

Applicable to RACs (Room Air Conditioners) and PACs (Light Commercial Packaged Air Conditioners) uses with fixed-speed ACs (5HP to 7HP) and inverter ACs (12HP to 25HP).


Uses various refrigerants such as R22, R410A, R32 & R454B.

Available in three-phase power configurations, supporting various power specifications for multiple countries and regions, with ultra-high energy efficiency.


压缩机规格分布图 »»

COMPRESSOR SPECIFICATIONS DISTRIBUTION CHART


变频机 INVERTER

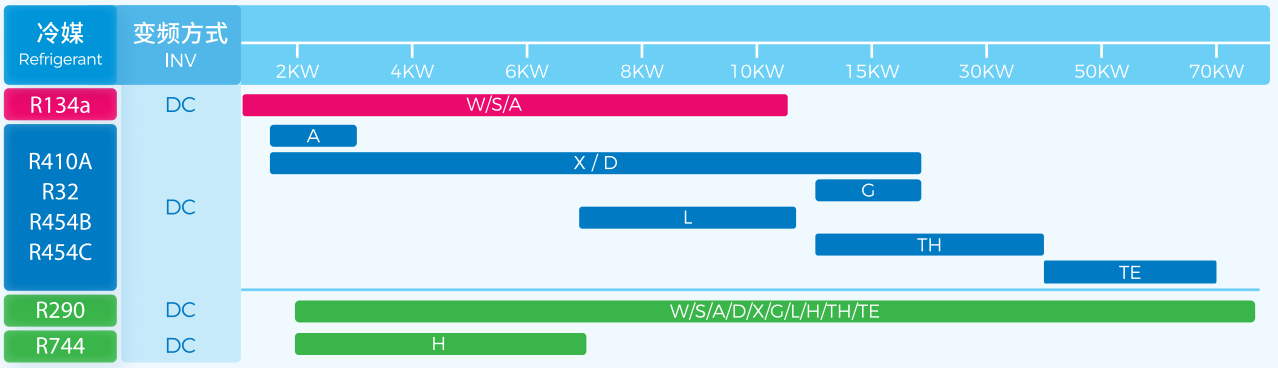

定速机 CONSTANT-SPEED

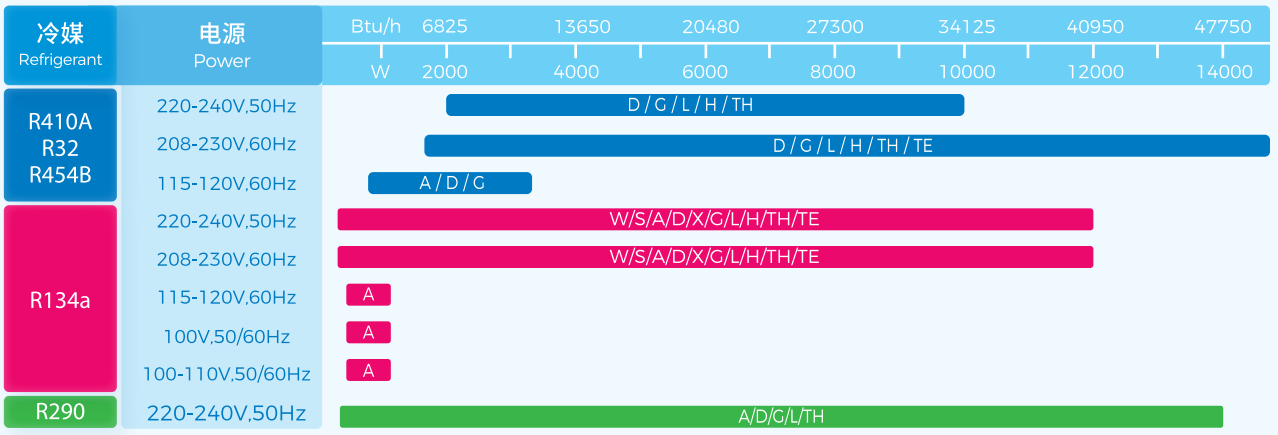

热带机 TROPICAL

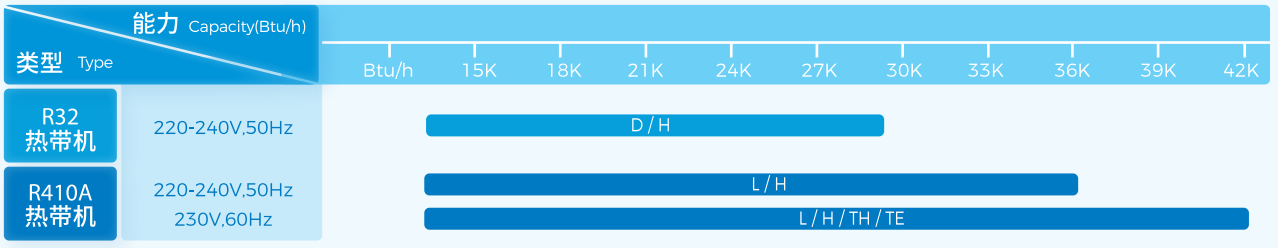

压缩机编号方法 MODEL CODE IDENTIFICATION

例 Example: A S L 145 S V - C 7A U **

制冷剂和用途 Refrigerant & Use

气缸数 Numberof Cylinder

系列 Series

排气量 Displacement

特殊规格辅助标示 Auxiliary mark for special specification

底角与储液器夹角 Angle between triangle base and accumulator

储液器规格 Accumulator specifications

底脚形式 Compressors Base Type

压缩机性能等级 Compressors Performance Scale	
C	标准型 COMMON COP models
S	高效型 SUPER COP models
X/T	超高效型 ULTRA COP models
G	低电压启动型 Low voltage starting models
M	无喷射热带机 None injection tropical models
D	超级无喷射热带机 Super none injection tropical models

电源 Power	
R	单相 Single phase ,100V/100-110V,50/60Hz
W	单相 Single phase ,110/115-120V,60Hz
S	单相 Single phase ,200V/200-220V,50/60Hz
N	单相 Single phase ,208-230V,60Hz
V	单相 Single phase , 220V/220-240V,50Hz
G	单相 Single phase ,220V,60Hz
T	单相 Single phase ,230V,50/60Hz
H	单相 Single phase ,265-277V,60Hz
C	三相 Three phase ,380-400V,50/60Hz
F/P	直流变频(铁氧体)DC INV(Ferrite)
D/K	直流变频(稀土)DC INV(Rare Earth)

启动方式 Starting Method	
-	KP (1)
1	KT (1)
2	KR (1)
3	K (3)
4	KQ (1)
5	KN (1)

压缩机编号方法 MODEL CODE IDENTIFICATION

例 Example: SH V 33 Y C 1 - E

系列 Series

名义输出功率 Rated Output

特殊规格 Special Specification

三角底角度φ Angle φ of Triangle Base

启动方式 Starting Method 电源 Power（1PH）	
13	100V,50/60Hz, 1PH
23	200V,50/60Hz, 1PH
33	220~240V,50Hz, 1PH
53	110~120V,60Hz, 1PH
55	PTC启动 PTC Motor Starting Method,115v,60Hz
73	208~230V,60Hz, 1PH
83	220V,60Hz, 1PH
20	变频用 For Inverter
40	380V,3PH

排气量 Displacement

储液器规格 Accumulator specifications

底脚形式 Compressors Base Type