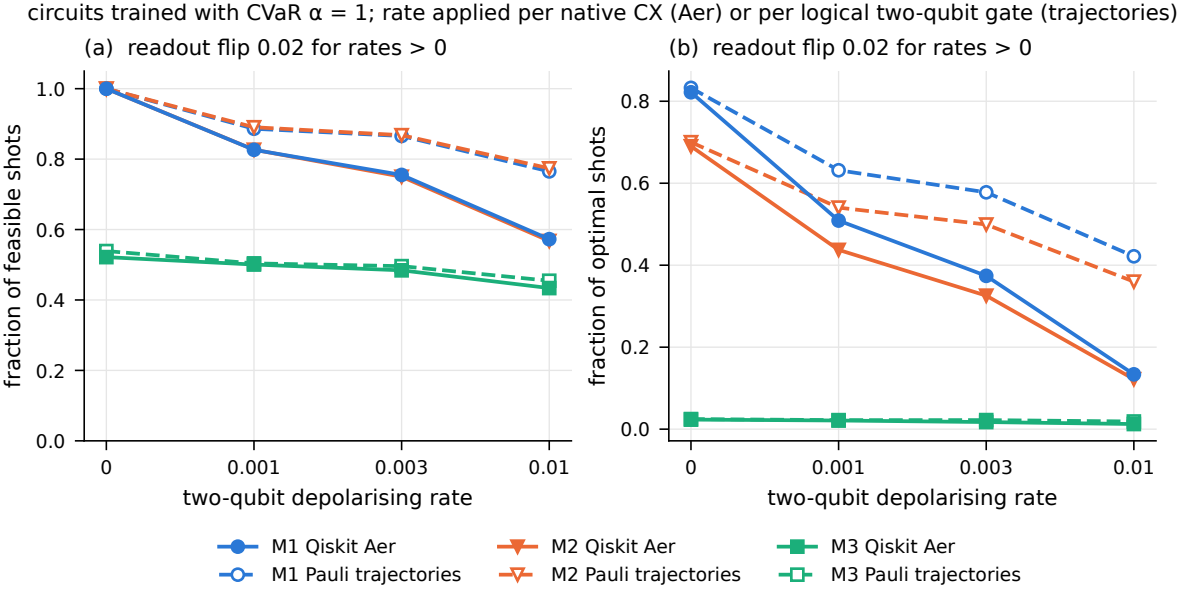
circuits trained with CVaR α = 1; rate applied per native CX (Aer) or per logical two-qubit gate (trajectories)
(a) readout flip 0.02 for rates > 0
(b) readout flip 0.02 for rates > 0
fraction of feasible shots
fraction of optimal shots
two-qubit depolarising rate
two-qubit depolarising rate
0.0
0.2
0.4
0.6
0.8
1.0
0
0.001
0.003
0.01
M1 Qiskit Aer
M1 Pauli trajectories
M2 Qiskit Aer
M2 Pauli trajectories
M3 Qiskit Aer
M3 Pauli trajectories