



Our excellence... to Provide you the Best !!!!



ABOUT US

EMCO Engineering Pvt. Ltd. is a sister concern company of **M/s Emco Dyestuff Pvt. Ltd.** who is having experience of more than 50 years in Chemicals and Pharma raw materials. Since our inception, Emco Engineering have always strived to be the leading and renowned supplier of superior quality products at the most competitive rates. It took us more than two decades, hard perspiring years to scale new heights and achieve a respectable position in the worldwide engineering Industry.

At **EMCO Engineering Pvt. Ltd.** we take any type of customization of our products, By continuous innovations and customer satisfaction we have obtain remarkable presence in domestic as well as overseas market.

Customer Service

Custom We believe in working effectively and efficiency to deliver products that fully satisfy our customer's need. Known for technical expertise and best customer service with quality products, we have gained trust and support of our client that forms the base of our growth.

Reliability:

Our reliability quotient comprises of our reputation as industry's most dependable source, with immense market awareness and foresightedness that is servicing every need of the customer.

Our Corporate Values:

- High priority to customer satisfaction
- High standards of quality, efficiency, reliability and safety.
- Promoting use of modern technology and practices.
- Maximizing Profitability and Cost-Effectiveness.
- Nurturing And Developing Human Resources.
- Cultivating Mutually Rewarding Relationships With Its Partners In Business.
- Commitment To Community Development And Environmental Protection.

OUR EXCELLENCE... TO PROVIDE YOU THE BEST!!!!

All the raw materials and finished products undergo stringent quality checks at different levels of manufacturing. Micro analysis is conducted on incoming ingredients and products thereby ensuring high durability, tensile strength and resistivity to adverse conditions. For us, total satisfaction of the customers is the prime concern.

OUR VISION

To be a leading machinery manufacturer and supplier by offering suitable products at revolutionary price. We shall inspire our employees to be the best they can be, build top class products while engaging them in sustainable practices and anticipate the needs of our customers

OUR MISSION

To provide quality products and their relative options along with efficient and proactive services to the customers, at competitive prices, so as to achieve total customer satisfaction & making sure that it creates a reliable relationship between us and our associates.

AIR JET MILL – (MICRONIZER) EMCO (PSI) Particle Surface Increaser

The **EMCO** PSI works independently with the process at a constant temperature. The powder is fed at below sonic speeds into the flat cylindrical milling chamber tangentially through a venturi. The system uses compressed air. Once the particles are inside the milling chamber they are accelerated by a series of jets around the perimeter to supersonic speed, in a spiral movement. The micronizing effect occurs when the slower incoming particles and the faster particles in the spiral path collide. While centrifugal force retains the larger particles at the periphery of the milling chamber, the smaller particles exit with the exhaust from the center of the chamber.

Features

- Documents to support FDA validation
- Narrow Particles Size Distribution (PSD)
- Simple and rapid assembly / disassembly
- No heat generation
- No cross contamination
- Liners (PTFE, Ceramic, Zirconia, TC Coating)

Sizes

PSI - LAB, PSI - 2, PSI - 4, PSI - 6, PSI - 8
PSI - 12, PSI - 16, PSI - 24, PSI - 30



JET MILL WITH ISOLATOR - CONTAINMENT SYSTEMS


Isolators are generally used in applications requiring a high degree of protection from external elements or contaminants, and they can serve as alternatives to sophisticated cleanrooms. Isolators typically feature built-in air filtration systems capable of significantly lowering the particle count in an enclosed area. We design the isolator under the classification of **OEB level 4**.



VACUUM TRAY DRYER - VTD


Vacuum Tray Dryers are used mainly for drying of high grade, temperature and oxygen sensitive products. Highly suitable for drying hygroscopic substances, which are dried to very low residual moisture content level. Frequently vacuum drying cabinets are the sole possibility for drying lumpy, glutinous products.

Model	VTD 6	VTD 12	VTD 18	VTD 24	VTD 36	VTD 48	VTD 96
Capacity in Trays	6	12	18	24	36	48	96
Number of Shelves	7	7	7	13	13	17	17

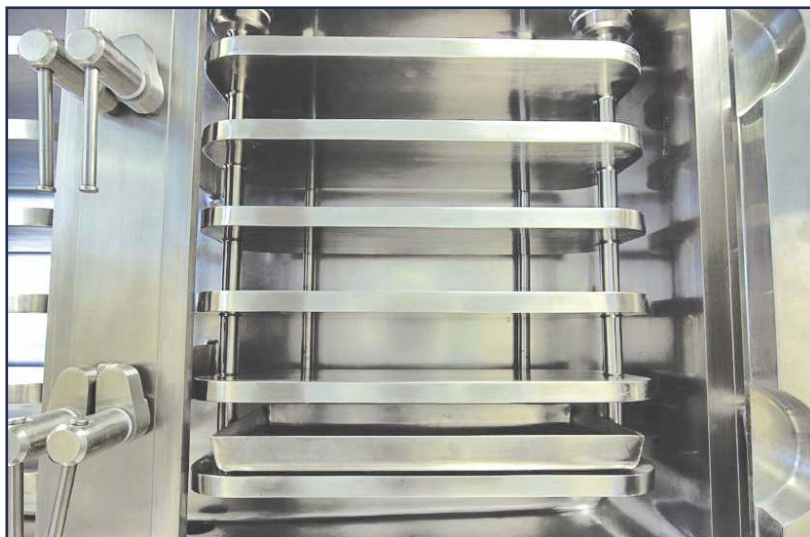

AIR TRAY DRYER - ATD

A Hot Air Tray Dryer is a flexible tool that can dry a range of bulk solids by removing moisture and liquids. It operates by forcing hot air through a processing chamber repeatedly. It is an energy-effective way to dry a variety of items. The basic working principle of this incredible machine is the continuous circulation of hot air

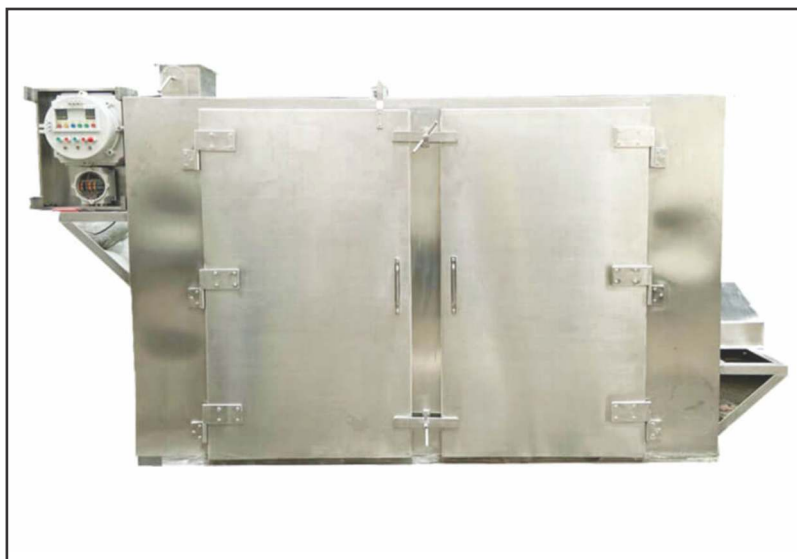

ROTARY CONE VACUUM DRYER - RCVD

ROTATING CONE WITH VACUUM DRYER is high precision low temperature vacuum drying. The Rotated Double Cone Vacuum Dryer is suitable for drying the material which operates at low temperature, easily oxidized, poisonous in nature. It has high efficiency heat transfer and high-speed drying which save energy. Raw materials are dried uniformly and have good quality at low temperature.

Features

- Reduces drying time
- Total contained process, dust control
- Efficient Loading and Discharge
- Choppers / Baffles (Lump breaker) give lump free product
- Easy Openable charging port
- Eliminates need for re-drying of lumps
- Handling and exposure of final product is avoided
- Easy to clean internal surface, thus insuring purity of product

Capacity

50 to 6000 liters equivalent to chamber vol.



ROTARY VACUUM PADDLE DRYER - RVPD / AGITATED VACUUM DRYER - AVD



To dry heat sensitive and air sensitive material under vacuum thus accomplishing the drying at moderate temperature avoiding contact with air. The entire drying chamber is well machined to Bring about a close encounter with the agitator Blade thus ensuring proper shuffling of the material.

Fast dry product discharge

Dried material is Discharged quickly by pushing action of the blade Towards the discharge valve. Internal heating is through a hollow shaft. The Blades are provided with scrappers with min. Clearance versus heated wall which increase the rate of heat transfer. Volume of the wet material loaded into the dryer is restricted to 40-45% of gross volume.

Capacity

50 to 6000 liters equivalent to chamber vol.

AGITATED NUTSCHE FILTER DRYER (ANFD)

ANFD is an equipment designed for drying or separation of solids and liquid from slurry. It is closed vessel made up of Stainless steel or other alloy material basically in cylindrical shape and top and bottom dished end.

Bottom part of dryer is detachable by using hydraulic power pack system also it has legs and caster wheel for mobility.

Guide rods are provided for smooth or leakage proof fitting with the help of Hydraulic cylinder.

Capacity

100 to 1000 ltrs.



NAUTA MIXER DRYER / CONICAL MIXER DRYER

Nauta dryer is vertical conical dryer (Jacketed) specially used for drying material like powders, pastes, slurries etc. It has hanging rotating mixing screw which conveys the material from bottom side of conical vessel to the top

Features

- High drying efficiency.
- Multi process equipment.
- Easy product discharge.
- Easy to clean.
- Effective Vacuum drying

Capacity

20 TO 3000 LITRES

PLOUGH SHEAR MIXER (PSM)

EMCO Plough Shear Mixer is designed for heavy duty mixing of both dry and wet material. The design provides three-dimensional mixing, pointed tips facilitates good penetration and shuffling of mass within. Penetration followed by agitation of mass in quick succession of results in homogeneity of powder mass both in dry and wet stages. Appropriate dough formation is reached in later process. Centrally mounted chopper will then operate to obtain wet granules of uniform size. Mixed homogenous mass can be easily discharged from bottom of the mixing chamber which is provided with a flush fit discharge port.

Features

- Inspection Doors with safety interlocks.
- Homogenized blending for dry and wet material.
- Bearing on lanterns out of mixing zone.
- Removable bolt arrangement of plough shovels providing easy accessibility to all inside parts of mixer.

Capacity

100 to 5000 liters.



REACTOR, HYDROGENATOR, CONDENSOR, RECEIVER



REACTORS

MOC SS316L, HASTELLOY

Capacity - 20 to 50, 000 LTRS.

HYDROGENATOR

Pressure 10KG TO 65KG,

Capacity - 50 to 5, 000 LTRS.

CONDENSER / HEAT EXCHANGER

- U Tube Type
- Box Type
- Shell & Tube Type (single or double pass)

RECEIVER / STORAGE TANKS

- We have manufactured all receiver including jacketed and storage tank as per various specification and according to the capacity.

VACUUM AND PNEUMATIC TRANSFER SYSTEM (VTS)

EMCO VTS technology provided innovative solution for automated transfer, dosing and packaging of powders by means of vacuum and pressure. VTS with its unique filtration concept makes it the only vacuum dense-phase system that functions at optimum level when handling ultra-fine, sticky and adhesive powders.

Features

- Dust free filling and discharging.
- Packaging.
- Dosing
- No product retention.
- No particle damage.
- Easy to clean.



CO - MILL



EMCO Co-Mill is used for High-Speed Shearing, Sizing, and grinding a wide range of wet and dry materials, without special attachments. As compared to the four common principle of size reduction i.e. cutting, attrition, impact and pressure, which often do not produce controlled size reduction, this machine utilizes the principle of centrifugal shearing force.

Features

- High speed Shearing, sizing & grinding
- Different profile of blade and sieve available.
- Imported laser driller Mesh for dry application.
- Top driven and under driven both options available.

MULTI-MILL

EMCO Multi Mill is used for High-Speed Shearing, Sizing, and grinding a wide range of wet and dry materials, without special attachments. As compared to the four common principle of size reduction i.e. cutting, attrition, impact and pressure, which often do not produce controlled size reduction, this machine utilizes the principle of centrifugal shearing force.

Features

- High speed Shearing, sizing & grinding
- Different profile of blade and sieve available.
- Suitable for wet and dry material.
- Belt driven and direct driven both options available.
- Easy mobility.



SPARKLE FILTER – ZERO HOLDUP

EMCO vertical type sparkle filter also called Zero hold up filter press used for filtration of impure contamination from liquid. Sparkle filter press is mostly used in industry like pharmaceutical, Oil & Chemicals, Distillery and Beverage industry etc.

The main operation of sparkle filter press is to filter the impure liquid which is arriving on top of each horizontal plate with increasing pressure, the filter media holds back the impurities and allows the filter to pass through center by interlocking cups, which takes the filtrate to the outlet of the filter. The cake formed between the horizontal plates can also be obtained. The function of filtration process becomes slow when the liquid reached its holding capacity into cake.

Features

- High quality of raw material used.
- Available in various size and different diameter having no. of plates.
- Zero hold up filter.
- Vertical type and horizontal type both options available.



VIBRO SIFTER



EMCO Vibratory Sifter is used for screening, sieving, grading for solid-liquid separation, process to separate the desired elements and the undesired elements from the combination of solid to solid and solid to liquid material. It is used in various industries such as Pharmaceutical, Chemicals, Cosmetics, plastics, paints, minerals, detergents, pesticides and fertilizers, dyestuff and pigments. Vibro sifter consists of a screen placed on the base plate attached centrally to a gyratory motor. The material fed through the inlet located on the top is dropped on the screen. The particles smaller than the mesh size pass from the screen and the larger sized particles are released through an outlet. The combination of vibratory motor and the weights placed on top and bottom of screen gives the desired filtration or separation of the material. Total assembly is mounted on suitable springs so that it becomes an independent body which vibrates without parting any vibrations to the foundations.

Features

- High quality of raw material used.
- Power full vibration by special vibro motor
- Side outlet and good discharge.
- Provided sieve with silicon sealing.
- Available in various size of sieve model.


RIBBON BLENDER

EMCO - Ribbon Blender Mixer machine perform mixing through ribbon blades. The name of equipment ribbon blender derived from its ribbon shaped blades uses for mixing process. Machine having U shaped bowls in which ribbon shaped blades welded onto one pipe shaft which is rotated through external motor and gearbox. Suitable size bearing and pedestal block provided for smooth rotation of shaft.

Ribbon blenders are available in different capacities and according to the customer requirement.

Capacity

10 Ltrs to 5000 Ltrs

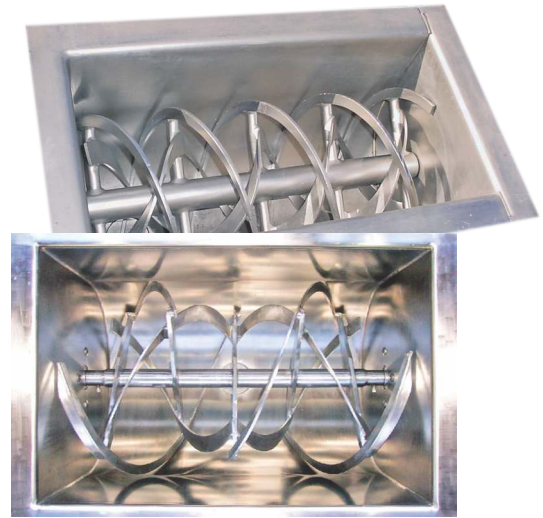

OCTAGONAL BLENDER



EMCO - Octagonal Blender (octagonal mixer) having octagonal shape which is used for mixing granular products.

The Octagonal Blender is an efficient and versatile blending machine for mixing and lubrication process of dry granules homogeneously. Two third of the volume of the Cone Blender is filled to ensure proper mixing.

Capacity

50 to 6000 Ltrs.

DOUBLE CONE BLENDER

EMCO - Double Cone Blender (double cone mixer) is suitable for the mixing of different type of powders.

Vessel having two cones either side of shell of the vessel having charging nozzle on one side and butterfly valve (Manual) on other side for discharge. Central baffle is provided inside the vessel for blending purposes.

Capacity

5 to 5000 Ltrs.



CONTA BLENDER / CAGE BLENDER

EMCO – Conta Blender unique design that rotate Container diagonally resulting homogenous blend.

Conta blenders are available in different capacities and according to the customer requirement.

Capacity

50 to 3000 Ltrs.



V – TYPE BLENDER

The V-type blender is used to produce a homogeneous solid to the solid mixture.

Features

- The capacity of 50 to 4200 liters and a useful capacity of 50% of the total.
- Mixing times vary between 3 and 15 minutes depending on the mixture.
- The unit incorporates a guard rail with electrical safety. The unit is manufactured in AISI 316 quality for all parts in contact with the product and AISI 304 for the supports and the rest of the equipment.



OUR CLIENTS





Head Office : 304, 3rd Floor, Western Edge -1, Western Express Highway,
Borivali (East), Mumbai - 400066, Maharashtra, India.

Factory : Emco Engineering Pvt Ltd
Survey No. 73, Naigoan Bapane Bridge, NH 48, Vasai - Virar, Maharashtra - 401208



+91 22 4243 3387
+91 98206 84319



info@airjetmill.com



www.airjetmill.com