

ALUMINUM ALLOY CONDUCTOR STEEL REINFORCED (AACSR)

Conductor shall be Aluminium Magnesium alloy Silicon strandard circular with steel reinforced (as pe IEC 61089) or any other international specification, such as BS, ASTM, DIN, Canadian, GOST & Swedish specification etc.

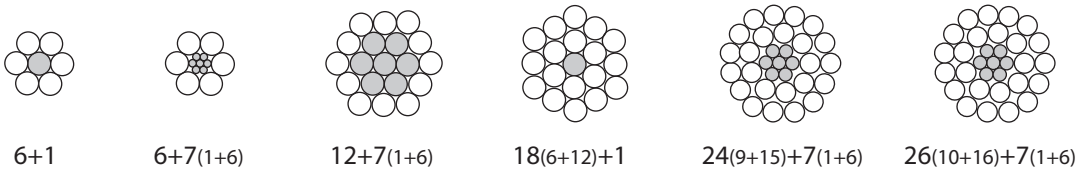


6+1 | 6+7(1+6) | 12+7(1+6) | 18(6+12)+1 | 24(9+15)+7(1+6) | 26(10+16)+7(1+6)

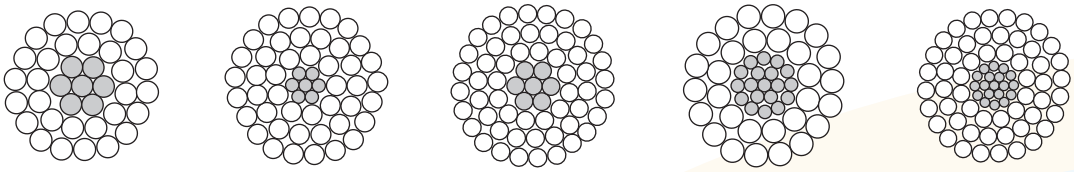


30(12+18) +7(1+6) | 45(9+15+21) +7(1+6) | 54(12+18+24) +7(1+6) | 30(12+18) +19(1+6+12) | 54(12+18+24) +19(1+6+12)

ALUMINUM CONDUCTOR ALLOY REINFORCED (ACAR)

ACAR has got a better mechanical and electrical properties as compared to an equivalent ACSR, AAC or AAAC. A very good balance between the mechanical and electrical properties therefore makes ACAR the best choice where the ampacity, strength and light weight are the main consideration of the line design.

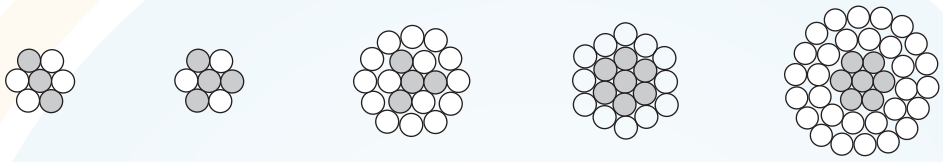


4 (1350) 3 (6201) | 3 (1350) 4 (6201) | 15 (1350) 4 (6201) | 12 (1350) 7 (6201) | 30 (1360) 7 (6201)

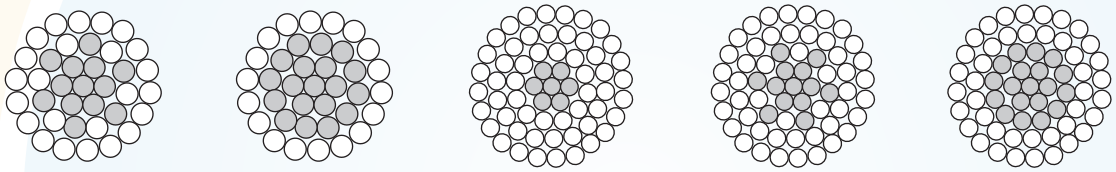

24 (1350) 13 (6201) | 18 (1350) 19 (6201) | 54 (1350) 7 (6201) | 48 (1350) 13 (6201) | 42 (1350) 19 (6201)

ECO CONDUCTOR

Eco Series conductors consists of trapezoidal shaped special Aluminium Alloy (AL-59) containing Magnesium, Silicon and Copper stranded with round core. The trapezoidal shape provides up to 96% compactness.



Al-59 Round Shape [7 (1+6)]+Trapezodial Al-59 [20 (8+12)]