


Treatment Process: Timber & Bamboo

Lists of Hard wood & Soft Wood

HARD Wood	SOFT WOOD
Babul	Chir
Black Siris	Deodar
Dhaman	Jack
Indian Rose Wood(Shisam)	Mango
Jaman	Gobre Salla
Mesua	Simal
Oak	Uttis (Red)
Sain	Uttis (White)
Sal	
Sandan	
Sisso	
Teak	
Khair	

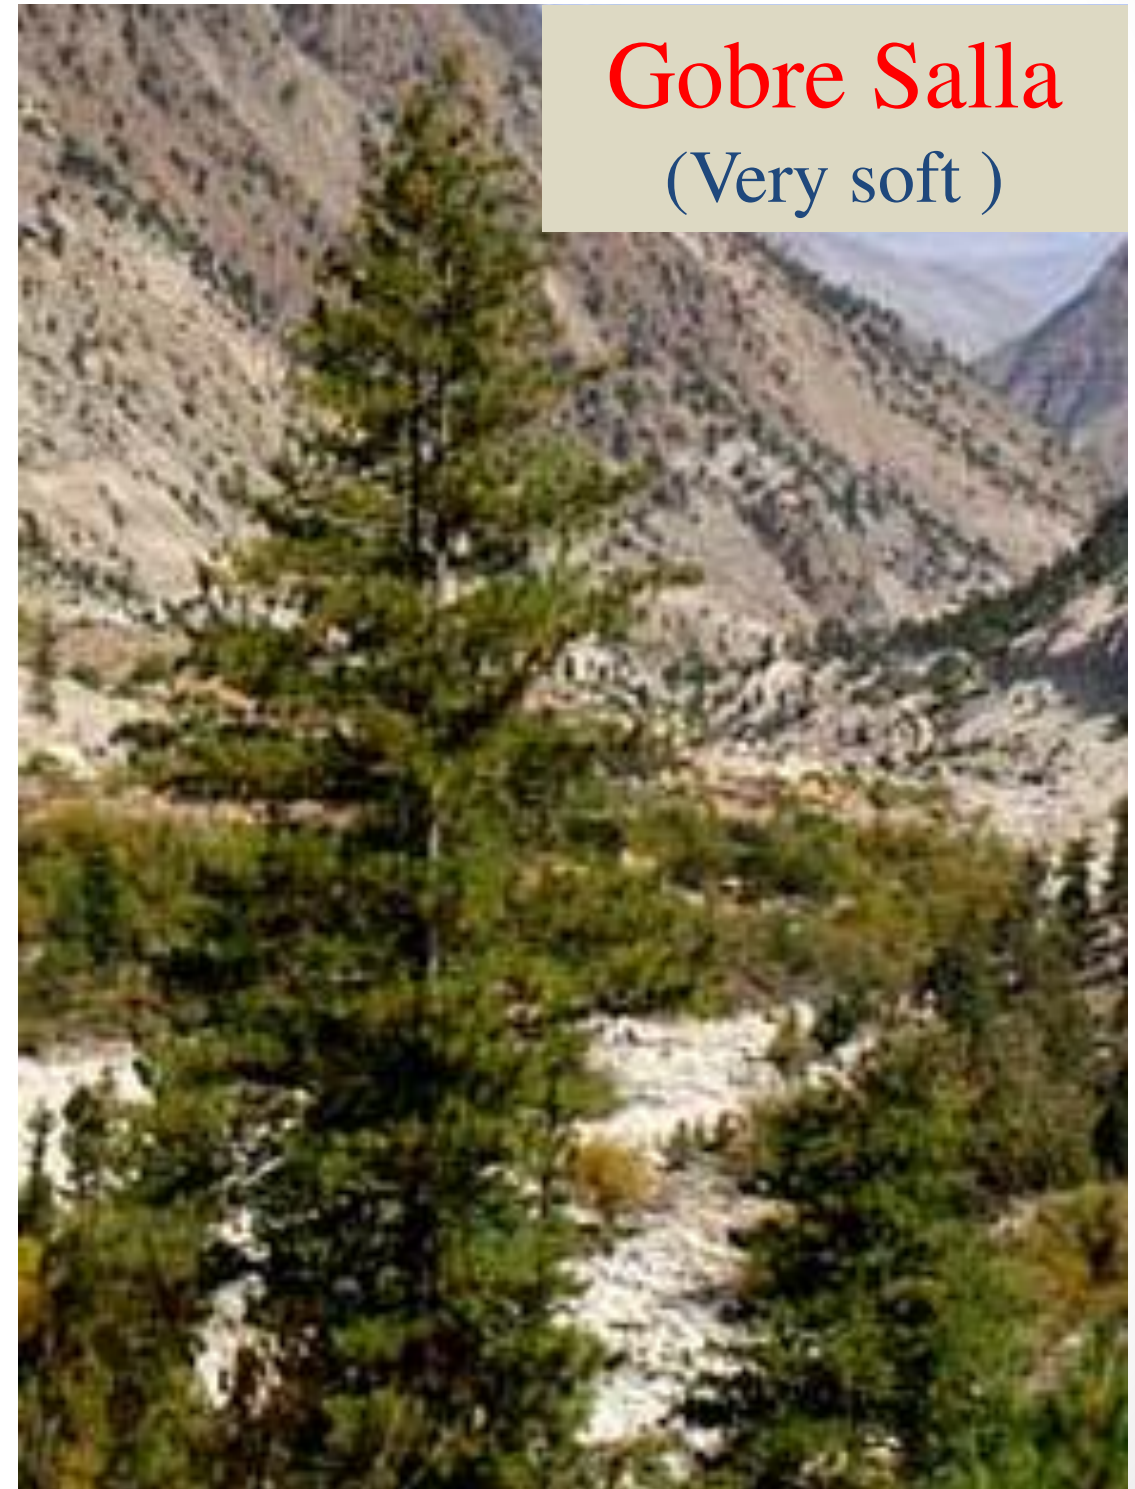

Gobre Salla
(Very soft)

Timber Treatment

All measures that are taken to ensure a long life of wood .

Treatment Process

- Let the wood dry for 3-4 month, in shed.
- After that, Varnish Anti-termites(Terminator, Borax etc.) chemical on the wood.

Varnishing Method as follows:

- Clean surface of wood.
- Varnish one layer anti-termites on the surface.
(For this brush and soft cloth can be used)
- After that Leave the wood for 6-8 hours

(Rs. 300 –400 Per
liter)



Treatment Process Contd.

- After that apply water proof layer of mix. of bitumen & Kerosene. For this boil the bitumen and mix it with Kerosene. Ratio of bitumen and kerosene is 2:1. Put bitumen on Kerosene but never pour Kerosene in bitumen.

Rs. 75-80 Per
liter



Rs.300-400 per
liter



- Liquid bitumen also available in market

Or

- Use black Japan Paint

Rs.300-400 per
liter



Normally in two storey residential building it cost roughly 10000 for timber treatment .

Treatment Process Contd.



Treatment Process Contd.



Bamboo Treatment

- At least three-years old before harvesting.
- Harvest at the beginning of dry Season.
- Leave culms standing four to eight weeks in the groves, propped on stakes or rocks, with branches and leaves uncut so as to increase evaporation surface and diminish insect entry points offered by freshly cut skin.

Some of the treatment methods

- Water Leaching method:
 - Put bamboo completely under water, weighted down in water, preferably in a running water than Stagnant water



Reference NBC 204

Bamboo Treatment Contd.

- White Wash and Other Coatings:

- Tar coating
- Lime wash coating

Note: these are effective only to the extent that they gave continuous coating at cut surfaces, exposed internodes, abrasion and slits.

- Brushing, Swabbing, Spraying and Dipping:

- Dieldrin 0.05 in aqueous emulsion protection against Dinoderus beetles.
- Spray after Mixing. DDT, 7 to 10% with kerosene oil & and BHC.
- Dipping green or partly dry bamboo for 10 minutes in a 5 % solution of DDT in fuel oil.

For Bamboo Treatment:

Water-leaching method seems to be the most relevant bamboo preservation technique for the Nepali situation.

NBC:204

Thank You