

# SEBN STANDARD REWORK SYSTEM

## Operating instruction

Version: 7.2.27

**Created by : Tomasz Baczun**  
**Verified by : Sirotek Vladimir**

**SEBN**  
21. 11. 2022

# SEBN STANDARD REWORK SYSTEM

## Obsah

|                                                        |    |
|--------------------------------------------------------|----|
| <b>1. Rework In</b>                                    | 3  |
| 1.1. Main window:                                      | 3  |
| <b>2. Log in process</b>                               | 4  |
| 2.1. Log in to the system:                             | 4  |
| 2.2. Password modification:                            | 4  |
| <b>3. How to register defected wire harness</b>        | 5  |
| 3.1. Scanning:                                         | 5  |
| 3.2. Data input:                                       | 6  |
| 3.3. Additional error codes:                           | 7  |
| 3.4. Functions:                                        | 9  |
| 3.4.1. Sensors scanning:                               | 10 |
| <b>4. Rework Out</b>                                   | 12 |
| 4.1. How to log out:                                   | 12 |
| 4.2. Errors modification:                              | 13 |
| 4.3. Data input:                                       | 14 |
| 4.4. Optional messages:                                | 15 |
| <b>5. Quality Control</b>                              | 16 |
| 5.1. Function to log in – log out:                     | 17 |
| <b>6. Project selection</b>                            | 18 |
| 6.1. Main menu:                                        | 18 |
| 6.2. Alternative project selections:                   | 18 |
| <b>7. Clip Test / Segment selection</b>                | 19 |
| <b>8. Web page</b>                                     | 20 |
| 8.1. Selection on the Web Page “By the team”           | 20 |
| 8.2. Selection on the Web Page “By the error code”     | 21 |
| 8.3. Selection on the Web Page “By pareto”             | 22 |
| 8.4. Selection on the web page by Top 3 mistakes       | 23 |
| <b>9. Rework of the modules:</b>                       | 24 |
| 9.1. Booking of the module into the rework application | 24 |
| 9.2. Visualization of the template in MAO system       | 26 |
| <b>10. Rework manual and flow</b>                      | 27 |

# SEBN STANDARD REWORK SYSTEM

|                                                  |    |
|--------------------------------------------------|----|
| 10.1. Rework manual.....                         | 27 |
| 10.2. Rework flow .....                          | 28 |
| 10.3. An example of the signal rework flow ..... | 29 |

# SEBN STANDARD REWORK SYSTEM

## 1. Rework In

### 1.1. Main window:

Rework 04.01.2018, ver. 7.1.1

Option Information Help Exit

Registration

\* CardID: ZSB No:

Registrator: Login Logout

Date of defect Shift Error producer

Shift of defect Board No. Conveyor No. Quality gate

Part type Part name

Error code Error description

Add more errors

Comment

Complaint ID

SAVE

EXIT

Tuesday  
23 January  
2018

IP: 10.40.0.27

project:

C8I



# SEBN STANDARD REWORK SYSTEM

## 2. Log in process

### 2.1. Log in to the system:




- Click on the button to see following form for log in and to input the password.

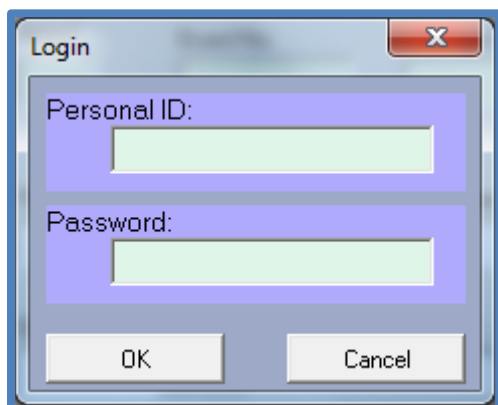
A dialog box titled "Login" with a close button (X) in the top right corner. It contains two text input fields: "Personal ID:" and "Password:". Below the fields are two buttons: "OK" and "Cancel".

- Press the button to log out

### 2.2. Password modification:



- Click on the icon to invoke the form

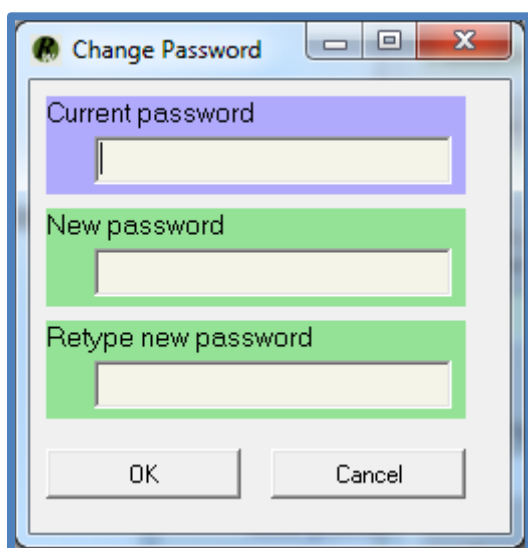
A dialog box titled "Change Password" with standard window controls (minimize, maximize, close) in the top right corner. It contains three text input fields: "Current password", "New password", and "Retype new password". Below the fields are two buttons: "OK" and "Cancel".

# SEBN STANDARD REWORK SYSTEM

## 3. How to register defected wire harness


### 3.1. Scanning:

Scan Car Id and ZSB No. from the production label and following info will be displayed in the fields below.

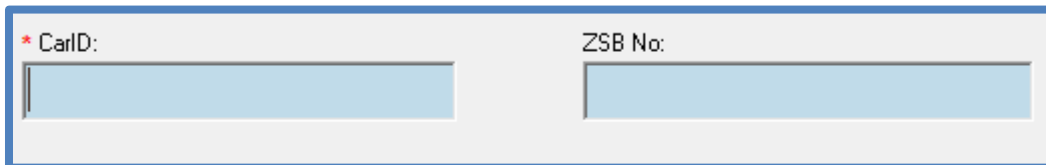

A screenshot of a web form with two input fields. The first field is labeled '\* CarId:' and the second is labeled 'ZSB No:'. Both fields are empty and have a light blue background.

Rework application checks if is Car Id and ZSB No. correct. If it's wrong there will be displayed message as you can see below.

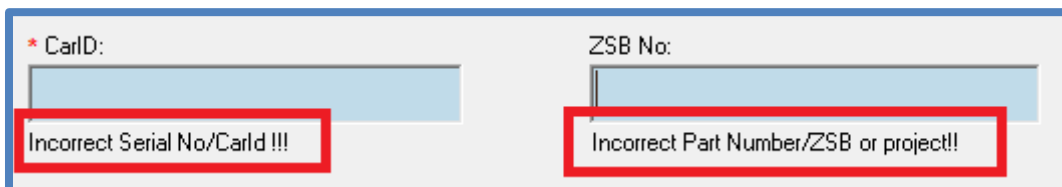

A screenshot of the same web form as above, but now showing error messages. The first field, labeled '\* CarId:', has a red border and the text 'Incorrect Serial No/CarId !!!' below it. The second field, labeled 'ZSB No:', also has a red border and the text 'Incorrect Part Number/ZSB or project!!' below it.

# SEBN STANDARD REWORK SYSTEM

## 3.2. Data input:

The screenshot shows a data input form for the SEBN Standard Rework System. The form is organized into several sections with labels and input fields. The top section includes 'Date of defect', 'Shift', and 'Error producer'. The middle section includes 'Shift of detect', 'Board No.', 'Conveyor No.', and 'Quality gate'. Below this are 'Part type' and 'Part name'. The bottom section includes 'Error code', 'Error description', an 'Add more errors' button, a 'Comment' text area, and a 'Complaint ID' field.


|                                                |                      |                      |                      |
|------------------------------------------------|----------------------|----------------------|----------------------|
| Date of defect                                 | Shift                | Error producer       |                      |
| <input type="text"/>                           | <input type="text"/> | <input type="text"/> |                      |
| Shift of detect                                | Board No.            | Conveyor No.         | Quality gate         |
| <input type="text"/>                           | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Part type                                      | Part name            |                      |                      |
| <input type="text"/>                           | <input type="text"/> |                      |                      |
| Error code                                     | Error description    |                      |                      |
| <input type="text"/>                           | <input type="text"/> |                      |                      |
| <input type="button" value="Add more errors"/> |                      |                      |                      |
| Comment                                        | <input type="text"/> |                      |                      |
| Complaint ID                                   | <input type="text"/> |                      |                      |

- **Date of defect** – select the date of the defect
- **Shift** – shift where the defect was found
- **Error producer** – who made defect
- **Shift of detect \*** – shift which detected failure
- **Board No.\*** – identification number of the KSK board from TFS
- **Conveyor No.\*** – identification number of the assembly line
- **Quality gate** – select one of the zones where the failure was found
- **Part type** – select the type of the damaged part. The list of the types is specified by CQM documents.
- **Part name** – select or enter the name of the damaged part. List of the parts must be prepared by PPE and contains short name of the parts separately for each of the project.
- **Error code** – select the main error code .The list is prepared based on CQM documents
- **Error description** – it is automatically shown when error code is selected.
- **Comment \***– There can be inserted additional important details
- **Complaint ID \*** – optional field for complaint ID

\*- not required field


# SEBN STANDARD REWORK SYSTEM

## 3.3. Additional error codes:




- Press this button to insert more error codes in. This is function to insert more details about the problematic wire harness.

**Option 1: First registration** – Car ID and ZSB is scanned in the main form

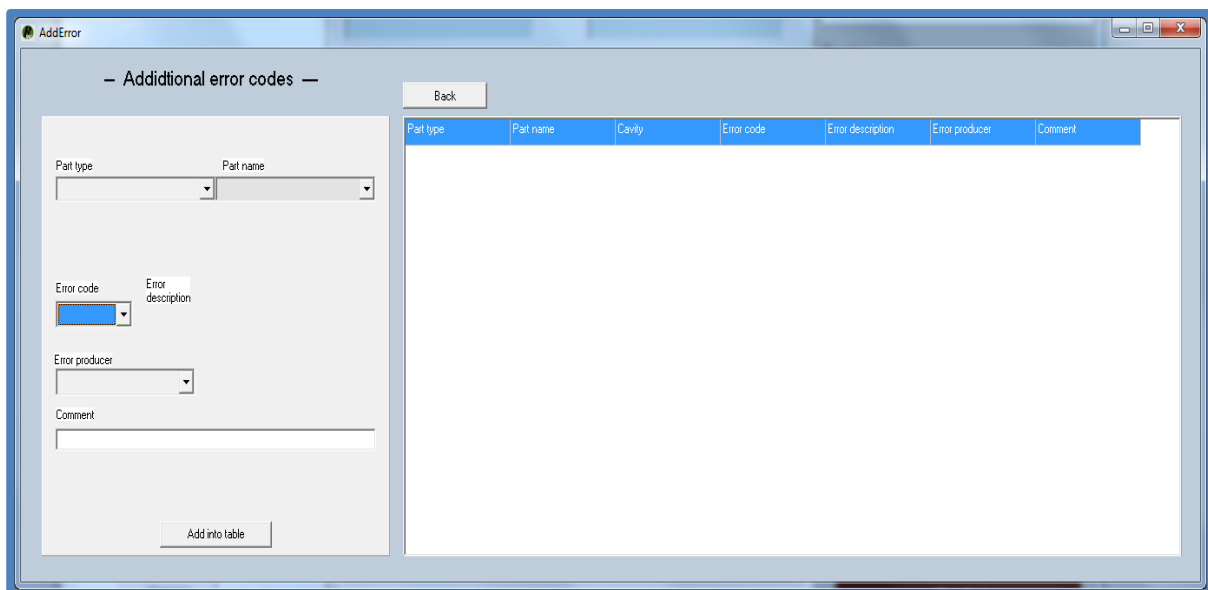A screenshot of the "AddError" software window. The title bar says "AddError". The main area is titled "Additional error codes" with a "Back" button. On the left, there are input fields for "Part type", "Part name", "Error code", "Error description", "Error producer", and a "Comment" text area. An "Add into table" button is at the bottom left. On the right, there is a table with columns: "Part type", "Part name", "Cavity", "Error code", "Error description", "Error producer", and "Comment". The table is currently empty.

**Option 2: Adding error codes for the relevant Rework ID**

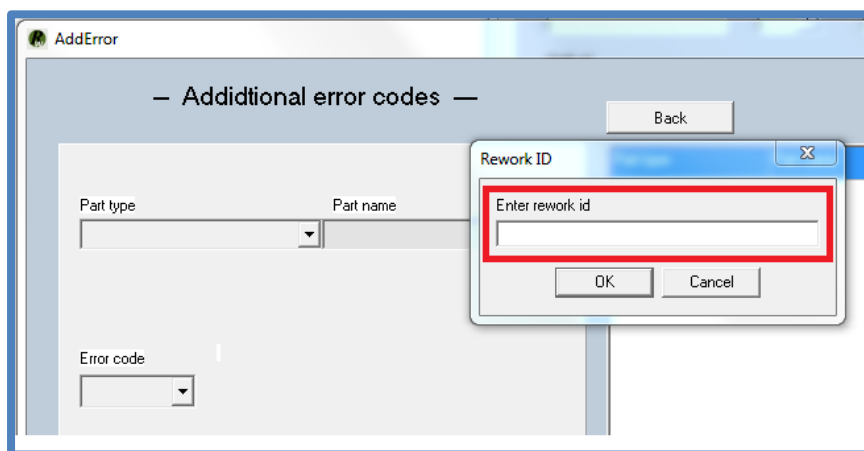A screenshot of the "AddError" software window with a "Rework ID" dialog box open. The dialog box has a title bar "Rework ID" and a text input field labeled "Enter rework id". The input field is highlighted with a red rectangle. There are "OK" and "Cancel" buttons at the bottom of the dialog. The background form is partially visible, showing the "Additional error codes" section.

➤ There must be inserted Rework ID by the operator

# SEBN STANDARD REWORK SYSTEM

Part type: carcasa

Part name: KF FB RE

Error code:

Error producer:

Comment:

Add into table

- **Part type** – select the type of the damaged part. The list of the types is specified by CQM documents.
- **Part name** – select, or enter the name of the damaged part. List of the parts must be prepared by PPE and contains short name of the parts for each of the project separately.
- **Error code** – select the main error code .The list is prepared based on CQM documents
- **Error description** –it is automatically shown when operator select errors code

## Note:

**Comment \***– There can be described additional important details in this option.

# SEBN STANDARD REWORK SYSTEM

## 3.4. Functions:

– Additional error codes –

Back

Part type Part name

Error code Error description

Error producer

Comment

Add into table

| Part type | Part name | Cavity | Error code | Error description | Error producer | Comment |
|-----------|-----------|--------|------------|-------------------|----------------|---------|
|-----------|-----------|--------|------------|-------------------|----------------|---------|




- Press the button to transfer data from the form into the temporary table – shown in the next window.





- Press the button to return into the main window of the application.

# SEBN STANDARD REWORK SYSTEM

## 3.4.1. Sensors scanning:

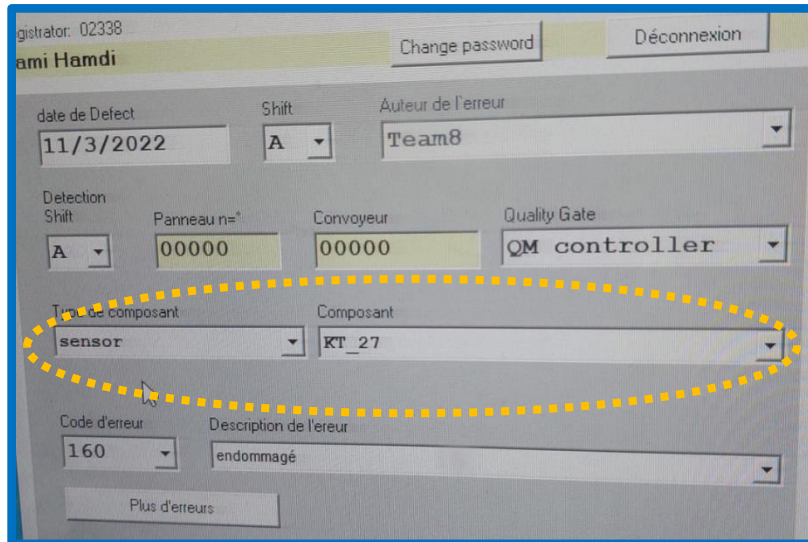

➤ Select **“Sensor”** from the database window (type of component) in the rework application during registration of the W/H!

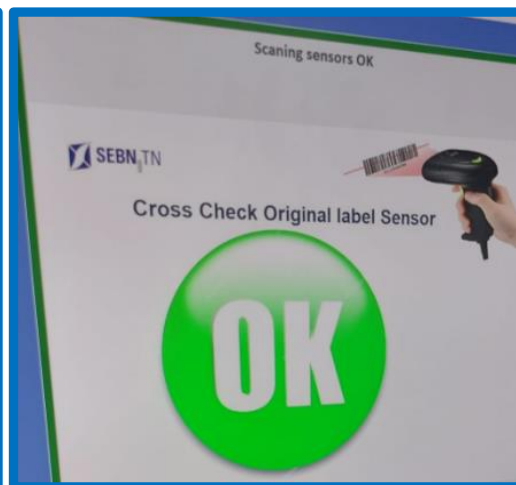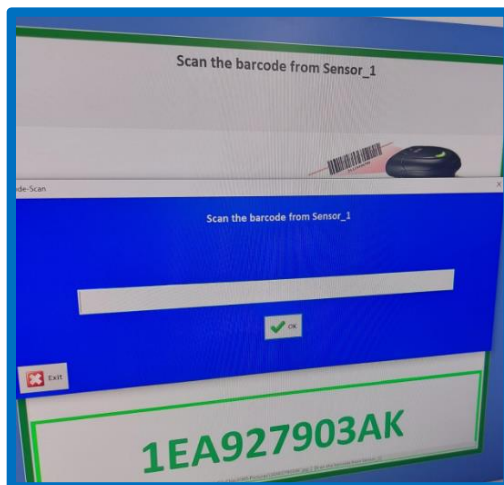

- System request scanning of the sensor barcode (if the label is under the tape , remove tape before scanning)
- System shows result after scanning of the sensor barcode

**Comment \***– If sensor will not be scanned clip test will be automatically blocked.

# SEBN STANDARD REWORK SYSTEM

## 3.5. Additional errors data saving:




- This icon is active only for the operators, which are logged in.

A dialog box titled "Rework Card" with a light blue header. It contains several input fields: "Car ID:" with value "1711231042", "ZSB no:" with value "0FD002922002", "Registrator:" with value "480 2018-01-24 06:28:15", "Reworker:" (empty), "Shift:" with value "1", "Error producer:" with value "team1", "Error code:" with value "500", "Part:" with value "kostka1", "Descriptor" with value "missing", and "Comment:" (empty). At the bottom, there is a green box labeled "Rework ID:" containing "C8I" and a yellow box with the number "6". An "OK" button is at the bottom right.

If you press button “SAVE”, application will automatically perform following items:

- Rework ID is issued to the damaged wire harness. All of the information is being stored in DB.
- Label has been printed,
- PUR feedback file is moved into the another location,
- Clip test feedback file is removed,
- Status in the system is set to “**Rework In**”
- Harness will be automatically blocked by the system when is registered more than 3 times in the rework application due to electrical problem

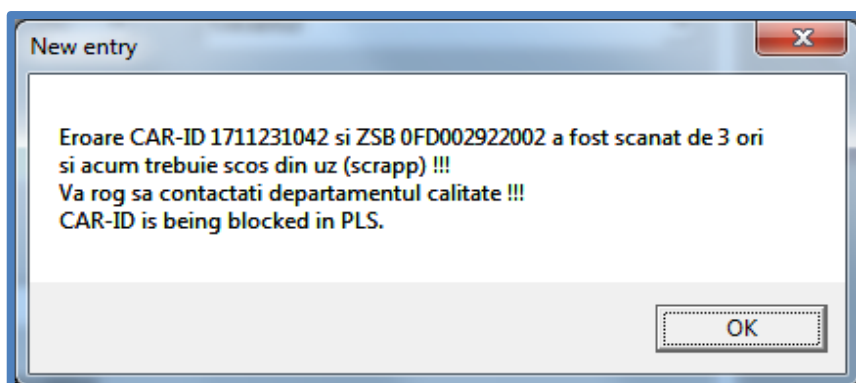

# SEBN STANDARD REWORK SYSTEM


## 4. Rework Out

In this step PPR operator insert data about complete rework activities into the system.

The screenshot shows a software interface for 'Reworked' Quality control. It features several input fields and buttons. At the top, there's a 'Rework ID' field with an 'OK' button. Below that, a 'Reworker' field is populated with 'Repairing worker', followed by 'Login' and 'Logout' buttons. An 'Error producer' field is also present, with 'Change' and 'Add Errors' buttons. A 'Comment:' field is located below the error producer. At the bottom center, there is a large 'SAVE' button.

**Rework ID** – field to type the Rework ID from the previous step


### 4.1. How to log out:





- When you press this button, system will automatically switch you off from the application.

# SEBN STANDARD REWORK SYSTEM

## 4.2. Errors modification:




– This button allows operator to make modifications for the main error codes. All of the information will be replaced with the new modified data.

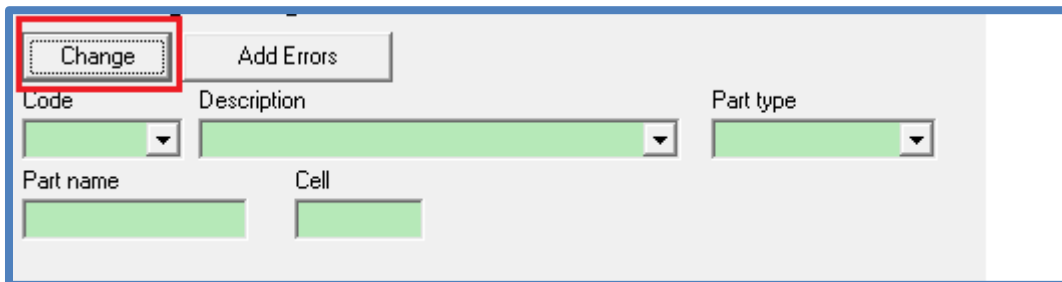A form for modifying error codes. It features a "Change" button (highlighted with a red box) and an "Add Errors" button. Below the buttons are three dropdown menus labeled "Code", "Description", and "Part type". At the bottom, there are two text input fields labeled "Part name" and "Cell".


- Press the button to open the form to insert additional error codes.

This functionality let us to insert additional mistakes which have not been detected, or recorded (from the red card), at the beginning of the rework (mistakes found, or made during repairing)

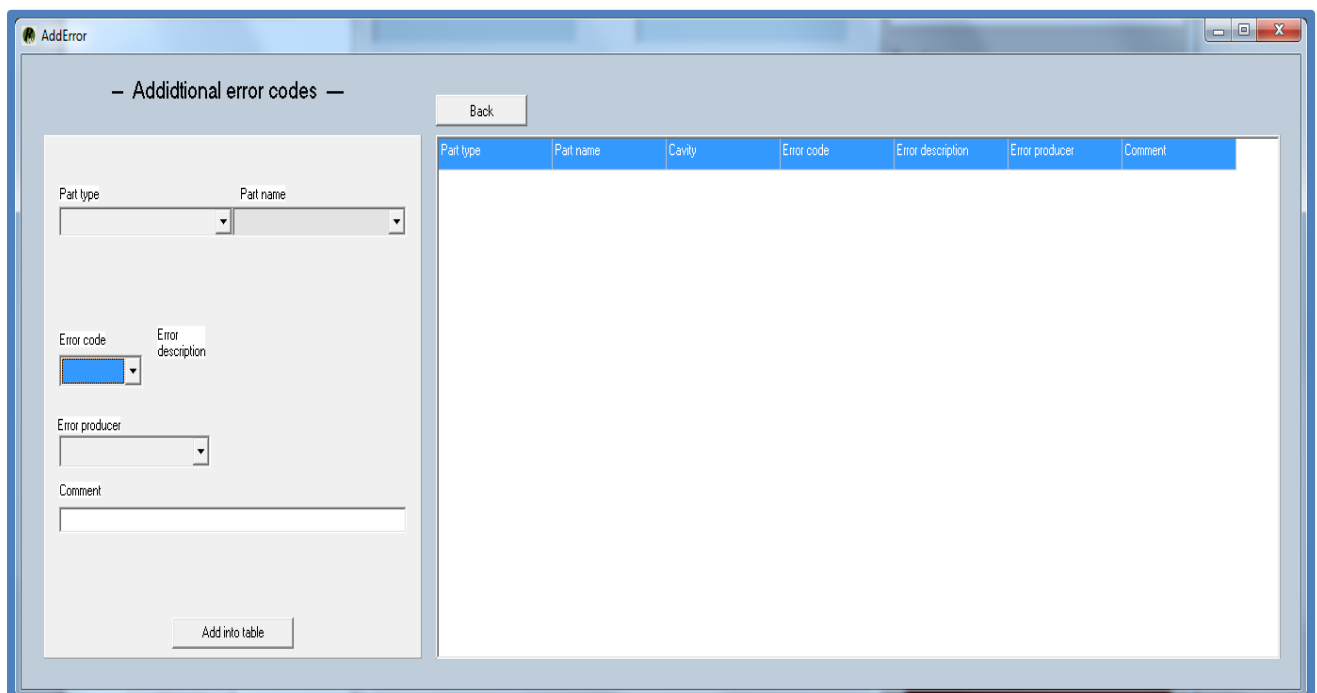A screenshot of a software window titled "AddError". The window has a title bar with standard Windows controls. Inside, there's a header "– Additional error codes –" and a "Back" button. Below the header is a form with several fields: "Part type" and "Part name" (both dropdown menus), "Error code" (a dropdown menu with a blue highlight), "Error description" (a text input field), "Error producer" (a dropdown menu), and "Comment" (a text input field). At the bottom of the form is an "Add into table" button. To the right of the form is a table with the following columns: "Part type", "Part name", "Cavity", "Error code", "Error description", "Error producer", and "Comment". The table is currently empty.

# SEBN STANDARD REWORK SYSTEM

## 4.3. Data input:

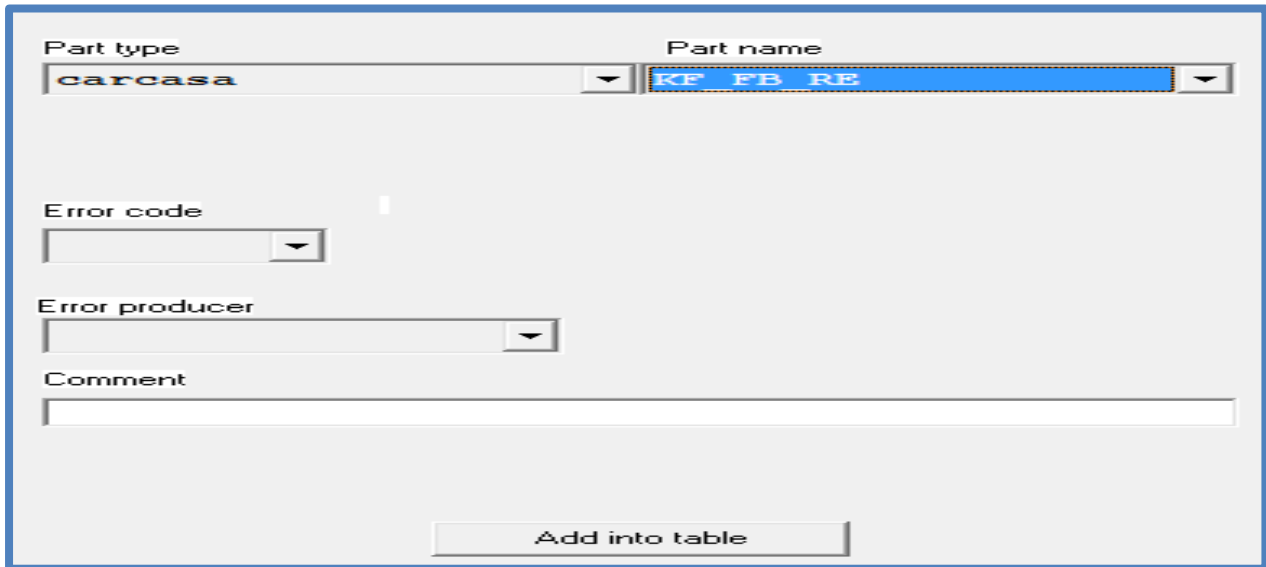

The screenshot shows a data input form with the following fields and controls:

- Part type**: A dropdown menu with "carcasa" selected.
- Part name**: A dropdown menu with "KF FB RE" selected.
- Error code**: A dropdown menu.
- Error producer**: A dropdown menu.
- Comment**: A text input field.
- Add into table**: A button at the bottom right of the form.

**Part type** – select the type of the damaged part. The list of types is specified by CQM documents.

**Part name** – select or enter the name of the damaged part. List of the parts must be prepared by PPE and contains short name of the parts for each project separately.


**Error code** – select the main error code. The list of the error codes is created based on CQM documents

**Error description** – it is automatically shown when error code is selected

**Comment \*** – operator can input additional important details in this column



- Press the button to transfer data from the form into the temporary table – shown next to it.



- Press the button to return back into the main window of the application




- This button is active when the Rework ID was found and it saving data about finished reworks in the database.




- Press this button to add any of the additional error codes without closing the reparation

# SEBN STANDARD REWORK SYSTEM

## 4.4. Optional messages:

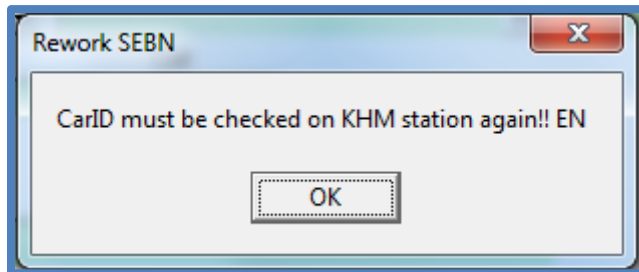

In this case Rework ID is not completed. There is missing status of the clip test in the rework zone.



Status of the welding process is not correct. All of the splices must be finished, otherwise you are not able to complete this process.

# SEBN STANDARD REWORK SYSTEM

## 5. Quality Control

The last step of the repairing is assigned to the quality worker.

The screenshot shows a web application interface for the 'Quality control' step. At the top, there is a tab bar with 'Reworked' and 'Quality control' (the latter is highlighted with a red box). Below the tabs, there is a 'Rework ID' input field with a green background and a 'Show' button. Underneath, there is a 'Confirmation by QM' section with a green bar containing the text 'Controlling worker', a 'Login' button, and a 'Logout' button. A large yellow rectangular area occupies the middle of the interface. At the bottom, there are two buttons: 'Confirm' and 'Reject'.

**Rework ID** - field to type in the Rework ID.



- Press this button to see the details about Rework ID

The screenshot shows a detailed view of a Rework ID. It features a large yellow rectangular area containing the following text: 'Serial No. / CarID:: 1711231042', 'Part No. / ZSB:: 0FD002922002', 'Error code: 500', 'Error description: missing', 'Part type: housing', 'Part name: kostka1', and 'Comment:'. The text is in a dark font, and the yellow background is solid.

# SEBN STANDARD REWORK SYSTEM

## 5.1. Function to log in – log out:




These are buttons to make log in and log out. Log in process is necessary to go through the verification.



Button to close the Rework ID

There is displayed following message on the screen if the clip test file does not exist:

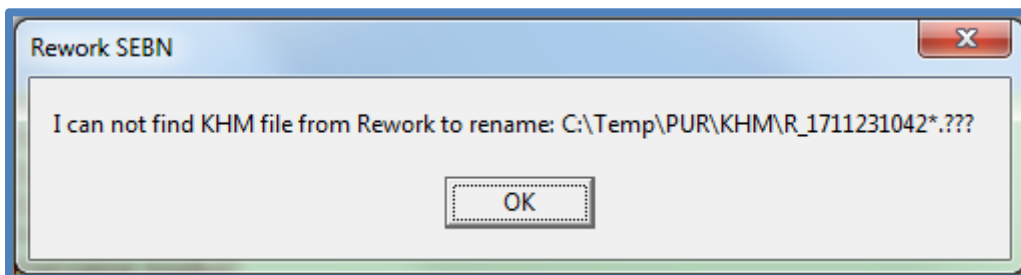

Clip test must be performed in the rework zone and result is to create file with pattern: **“R\_CARID.txt”**.

### Results:

- Status in the PLS is changed to **“Rework Out”**.
- Label is printed out.
- File from the clip test has been renamed from **“R\_CarID.txt”** to **“CarID.txt”**.




- This button allows operators to reject all of the changes. Status of the Rework ID will be modified back to the status **“Rework In”**.

# SEBN STANDARD REWORK SYSTEM


## 6. Project selection

### 6.1. Main menu:

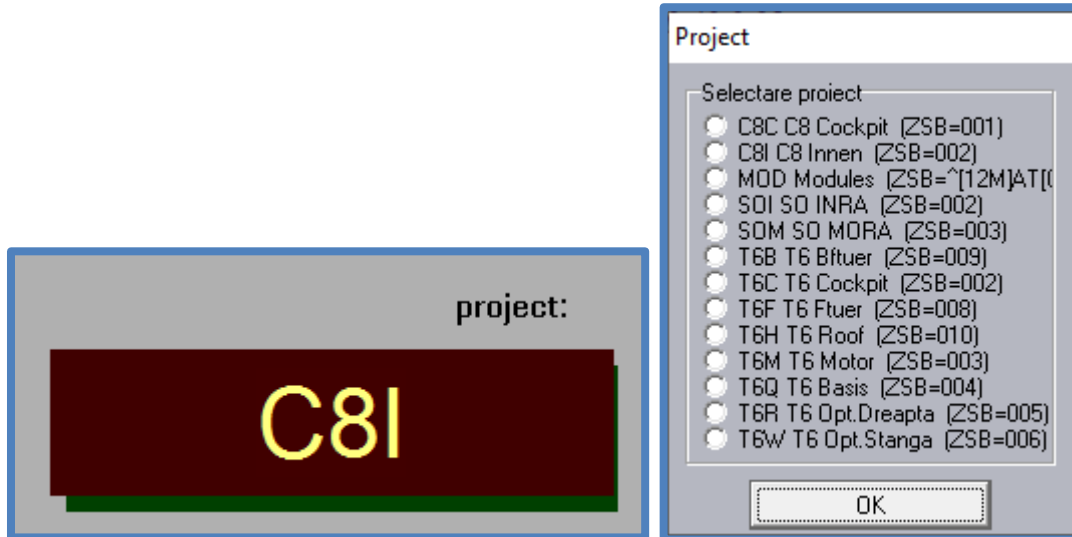




This button is to change current project to different one

### 6.2. Alternative project selections:

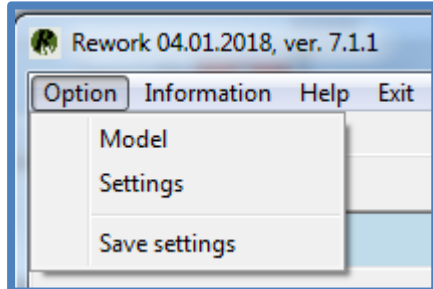

**Model**-alternative way to change current project

**Settings**- feedback files location and IP address of the Kyocera printer (optional)

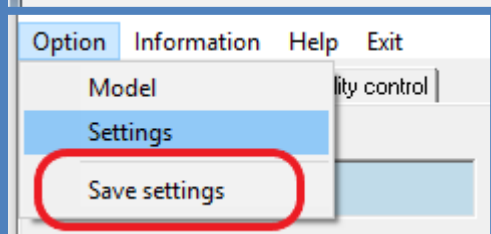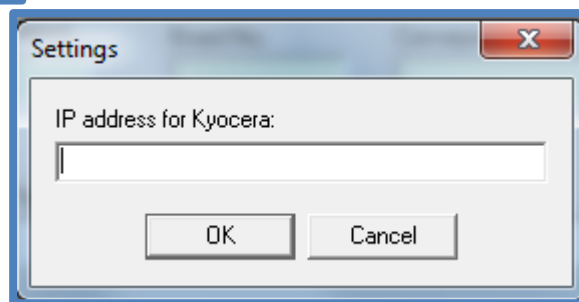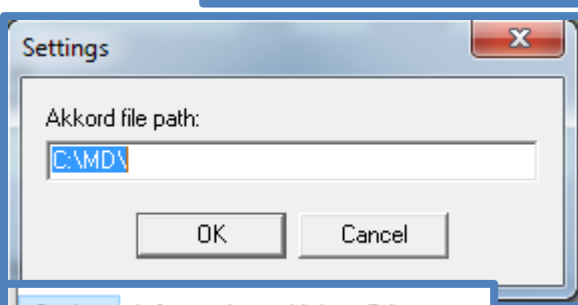

**Save settings** – all settings are saved in the configuration file.  
Last used project becomes to default one.

# SEBN STANDARD REWORK SYSTEM

## 7. Clip Test / Segment selection

The screenshot displays the SEBN STANDARD REWORK SYSTEM interface. A modal dialog box titled "RegionForm" is centered on the screen, titled "Inițializarea regiunilor de testare a cipurilor." (Initialization of chip testing regions). Inside the dialog, there is a "Region selection" section with a table of checkboxes for regions 01 through 10. Regions 01, 03, and 05 are checked. Below the table is an "All" checkbox which is unchecked. A "Confirma" (Confirm) button is at the bottom of the dialog. The background interface shows fields for "CardID" (1234567890), "ZSB No." (0FD163817002), "Registrator" (480), "Data defectului" (2020-02-07), "Schimb detectare" (A), "Tipul piesei" (crimpsplice), "Cod eroare" (100), and "ID Reclamant". A "Salvare" (Save) button is at the bottom. A red circle highlights the "Region selection" table in the dialog box.

| Region selection                             |                                   |
|----------------------------------------------|-----------------------------------|
| <input checked="" type="checkbox"/> Region01 | <input type="checkbox"/> Region06 |
| <input type="checkbox"/> Region02            | <input type="checkbox"/> Region07 |
| <input checked="" type="checkbox"/> Region03 | <input type="checkbox"/> Region08 |
| <input type="checkbox"/> Region04            | <input type="checkbox"/> Region09 |
| <input checked="" type="checkbox"/> Region05 | <input type="checkbox"/> Region10 |
| <input type="checkbox"/> All                 |                                   |


**Region selections** – From the displayed table select the number of the segment where is the particular problematic connector placed and then press button **“Confirm”**. The clip test will automatically request to test selected segments from the window.

Quality worker has to verify right selection of the segments and their testing as well before wire harness release!

# SEBN STANDARD REWORK SYSTEM

## 8. Web page

**Information** -> “Current reworked IDs” – it is a link to web page with the report of all of the opened wire harnesses in the rework zone.

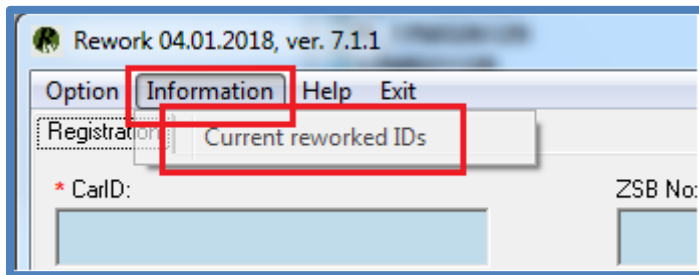

| Area    | Model | Quantity |
|---------|-------|----------|
| Reworks |       |          |
|         | C8C   | 5        |
|         | C8I   | 135      |

Web page shows number of the reworks for each project.

### 8.1. Selection on the Web Page “By the team”

REWORK SYSTEM RO  
version 2.0, May 2017

Main menu  
Number of KSK before approval step  
Number of registered KSK  
Number of performed reworks  
Number of reworks per shift  
Number of errors by type  
Details  
Build query  
Statistics  
User management

Manual  
Help  
Instruction of the application

[By teams](#) [By error code](#) [Pareto](#) [History weeks](#) [Top 3](#)

Rework statistics

By teams

Select model :

Select shift :

Date from:

Date to:

-  
-  
- select “By teams”

-select “Date from”

-select “Date to”

# SEBN STANDARD REWORK SYSTEM



Graph  
ready to  
print

## 8.2. Selection on the Web Page “By the error code”

REWORK SYSTEM RO  
version 2.0, May 2017

**Main menu**  
Number of KSK before approval step  
Number of registered KSK  
Number of performed reworks  
Number of reworks per shift  
Number of errors by type  
Details  
Build query  
**Statistics**  
User management

**Manual**  
Help  
Instruction of the application

[By teams](#) [By error code](#) [Pareto](#) [History weeks](#) [Top 3](#)

Rework statistics  
By error code

Select model :

Select team :

Select shift :

Date from :


Date to :

- select “By error code”

- select “Date from”

- select “Date to”

# SEBN STANDARD REWORK SYSTEM

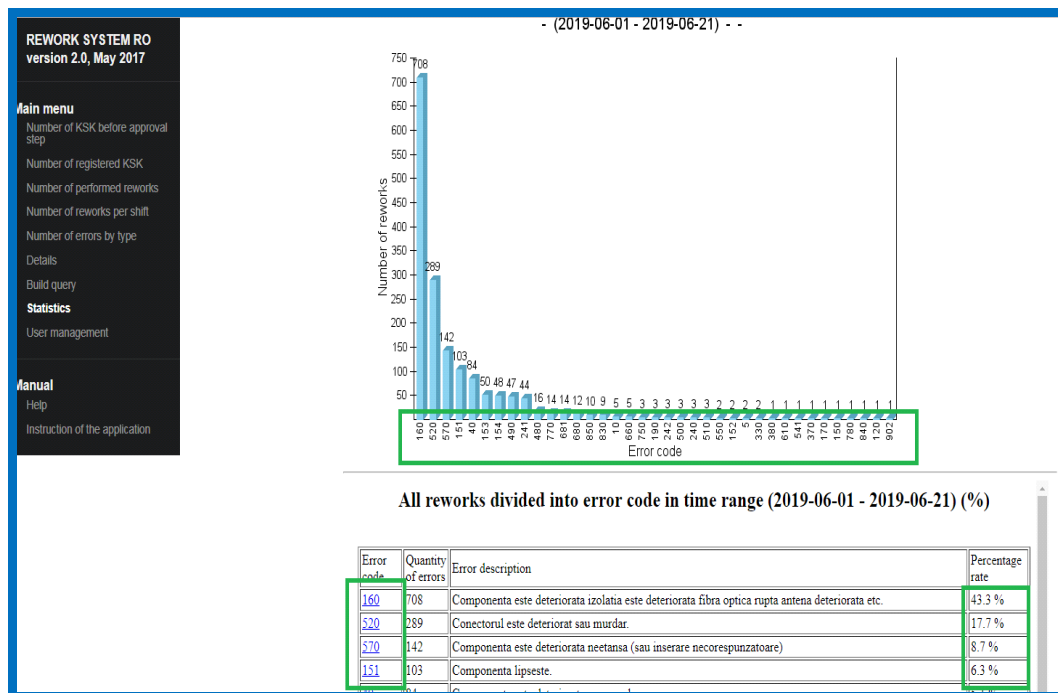

## 8.3. Selection on the Web Page “By pareto”

REWORK SYSTEM RO  
version 2.0, May 2017

**Main menu**

- Number of KSK before approval step
- Number of registered KSK
- Number of performed reworks
- Number of reworks per shift
- Number of errors by type
- Details
- Build query
- Statistics**
- User management

**Manual**

- Help
- Instruction of the application

By teams By error code **Pareto** History weeks Top 3

Rework statistics

Pareto

Select model : all ▼

Type car type : all

Select shift : all ▼

Date from: 2019-06-01

Date to: 2019-06-21

Show

- select “Pareto”

- select “Date from”


- select “Date to”

Graph ready to print

# SEBN STANDARD REWORK SYSTEM



## 8.4. Selection on the web page by Top 3 mistakes

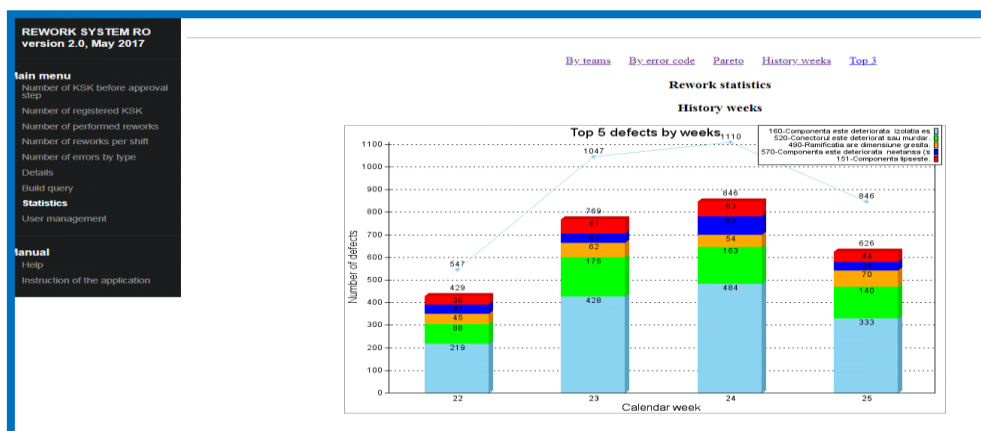

- select "Top 3"

## NOTE:

There are created hyperlinks on the **"Web page"** to see the flow of the signals with manual of the rework application in the last version. Please make sure your application is updated with last actual version!!!

# SEBN STANDARD REWORK SYSTEM

## 9. Rework of the modules:

### 9.1. Booking of the module into the rework application

Interface of the application is exactly the same as input for the wire harnesses, different is only input of the MAO unique number and part number of the module. In this case all necessary information is saved in MAO system based on MAO unique numbers.

Rework 26.04.2019, ver. 7.1.9

Optiune Informatii Ajutor Exit

Inregistrare

\* Unic No. / CAR ID

Part No. / ZSB

Operator

Operator Autentificare iesire

Data defectului Schimb Echipa de asamblare

Schimbul actual Nr. Meser Conveiorul Nr. Locul depistarii erorii

Tipul piesei Nume piesa

Cod eroare Descrierea erorii

Adaugati mai multe erori

Coment

ID Reclamant

Salvare

iesire

Wednesday  
12 June  
2019

IP: 10.193.5.58

project

**MODT6**

Instead of the “Car ID” is necessary to input “MAO unique number”

# SEBN STANDARD REWORK SYSTEM

Instead of “**ZSB number**” is necessary to input “**Module part number**”

# SEBN STANDARD REWORK SYSTEM

## 9.2. Visualization of the template in MAO system

Orders.Management - [Audit]

Window

Query

MAONr :  Description :

Uniq Nr : 11394249 SubSys.Date from : 2019-04-01 10:01:08

Workplace :  Until : 2019-06-12 10:01:08

Progress :  Inserted from : 2019-06-12 10:01:08

PartNbr :  Until : 2019-06-12 10:01:08

Archive

Results

|  | Id       | MAONr  | PartNbr       | Progress                | Workplace  | Description                                                        | Subsys_Date         | Insertion_Date   |
|--|----------|--------|---------------|-------------------------|------------|--------------------------------------------------------------------|---------------------|------------------|
|  | 11394249 | 304621 | M7317F7007ADH | 100:Production Started  | MD_SB146   | Assigned Board : 000146                                            | 2019-04-22 01:01:09 | 22. 4. 2019 1:0  |
|  | 11394249 | 304621 | M7317F7007ADH | 300:Forming Finished    | MD_SB146   | Board Released                                                     | 2019-04-22 01:09:04 | 22. 4. 2019 1:0  |
|  | 11394249 | 304621 | M7317F7007ADH | 500:Electrically Tested | ET-645     | Operator:00630-Electrically check process                          | 2019-04-22 22:56:01 | 22. 4. 2019 22:5 |
|  | 11394249 | 304621 | M7317F7007ADH | 500:Electrically Tested | ET-645     | Operator:00630-Backflush send to XPPS/Workstep:110/RFlag:50/BKey:1 | 2019-04-22 22:56:01 | 22. 4. 2019 22:5 |
|  | 11394249 | 304621 | M7317F7007ADH | 510:Rework In           | ORHRWK0005 | Operator:01214- Rework In                                          | 2019-05-21 00:57:19 | 21. 5. 2019 0:5  |
|  | 11394249 | 304621 | M7317F7007ADH | 520:Rework Out          | ORHRWK0006 | Operator:00585- Rework out                                         | 2019-05-21 00:57:40 | 21. 5. 2019 0:5  |
|  | 11394249 | 304621 | M7317F7007ADH | 500:Electrically Tested | ET-645     | Operator:00347-Electrically check process                          | 2019-05-23 10:51:28 | 23. 5. 2019 10:5 |


Total Records: 7 Selected Records: 0

Displayed status of the module (“Rework In – Out”) in the template of MAO system


# SEBN STANDARD REWORK SYSTEM

## 10. Rework manual and flow

### 10.1. Rework manual

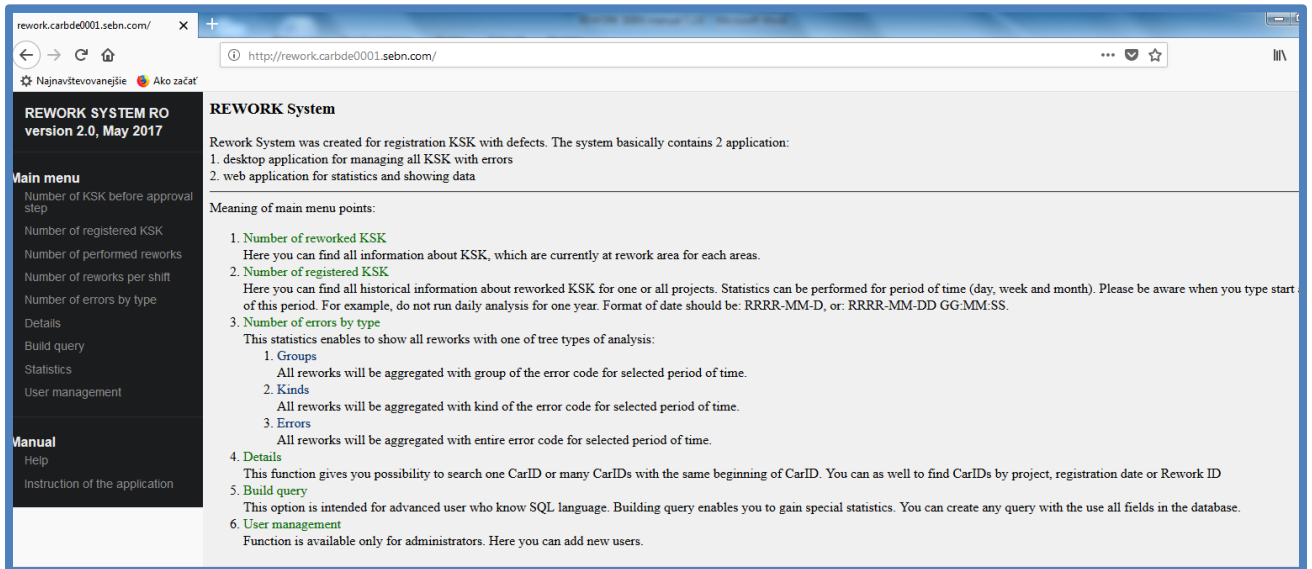

- Find web page <http://rework.carbde0001.sebn.com/> and from the menu on the left side select option **“Instruction of the application”**

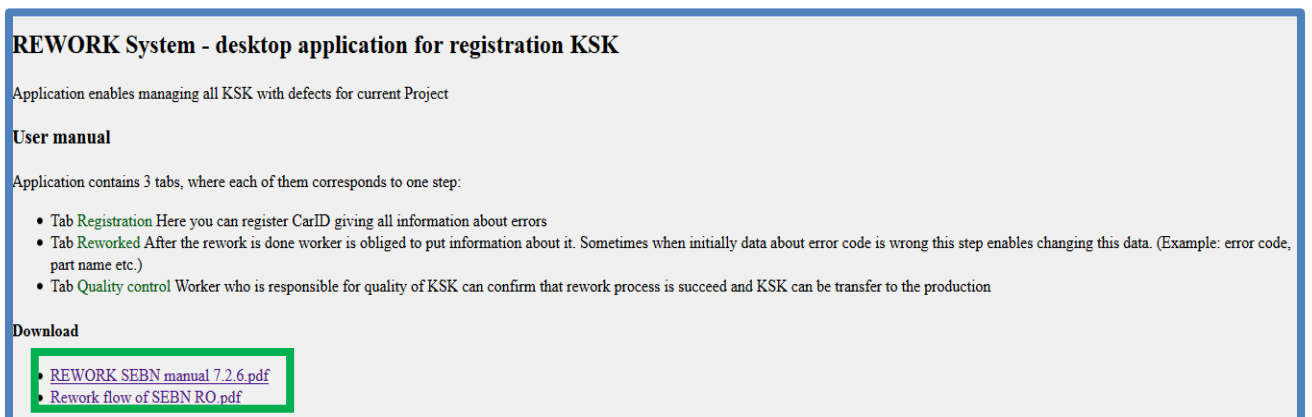

- From the highlighted green field select **“Rework manual”** to open general guideline how to use an application.

# SEBN STANDARD REWORK SYSTEM

## 10.2. Rework flow

- Find web page <http://rework.carbde0001.sebn.com/> and from the menu on the left side select option **“Instruction of the application”**

### REWORK System - desktop application for registration KSK

Application enables managing all KSK with defects for current Project

#### User manual

Application contains 3 tabs, where each of them corresponds to one step:

- Tab **Registration** Here you can register CarID giving all information about errors
- Tab **Reworked** After the rework is done worker is obliged to put information about it. Sometimes when
- Tab **Quality control** Worker who is responsible for quality of KSK can confirm that rework process is



#### Download

- [REWORK SEBN manual 7 2 6 pdf](#)
- [An example of the signal rework flow.pdf](#)

- From the highlighted green field select **“An example of the signal rework flow”** to see all files feedback and signals to guarantee all main processes are under system control.
  - **Note:** **“Rework flow”** can be set up differently for each of the sites with regards to different project and process, or some of the processes does not need to be used at all. Each of the sites has to check process chain to adjust all signals and feedback correct way for particular project!

# SEBN STANDARD REWORK SYSTEM

## 10.3. An example of the signal rework flow

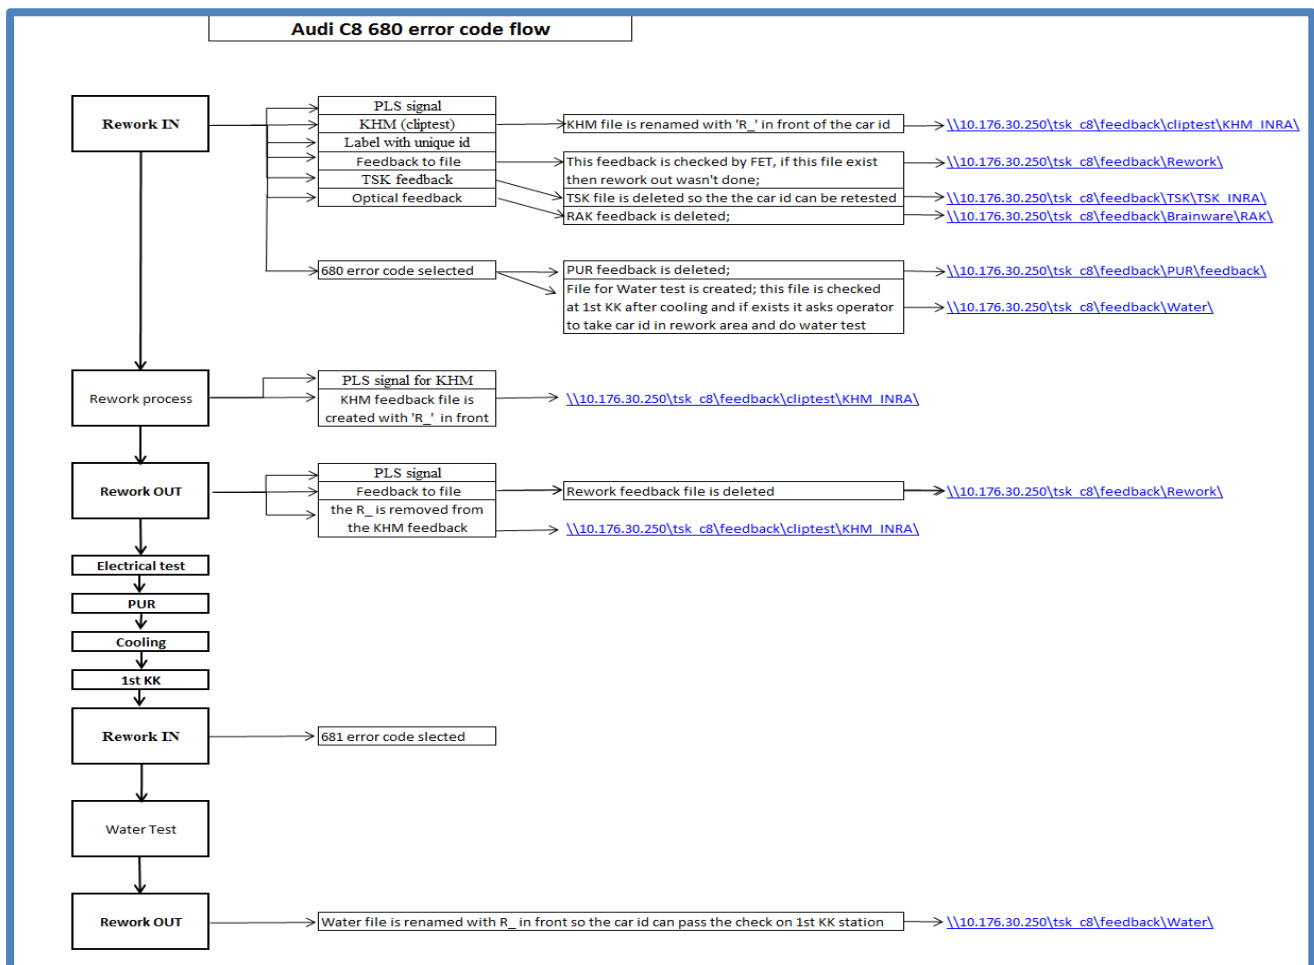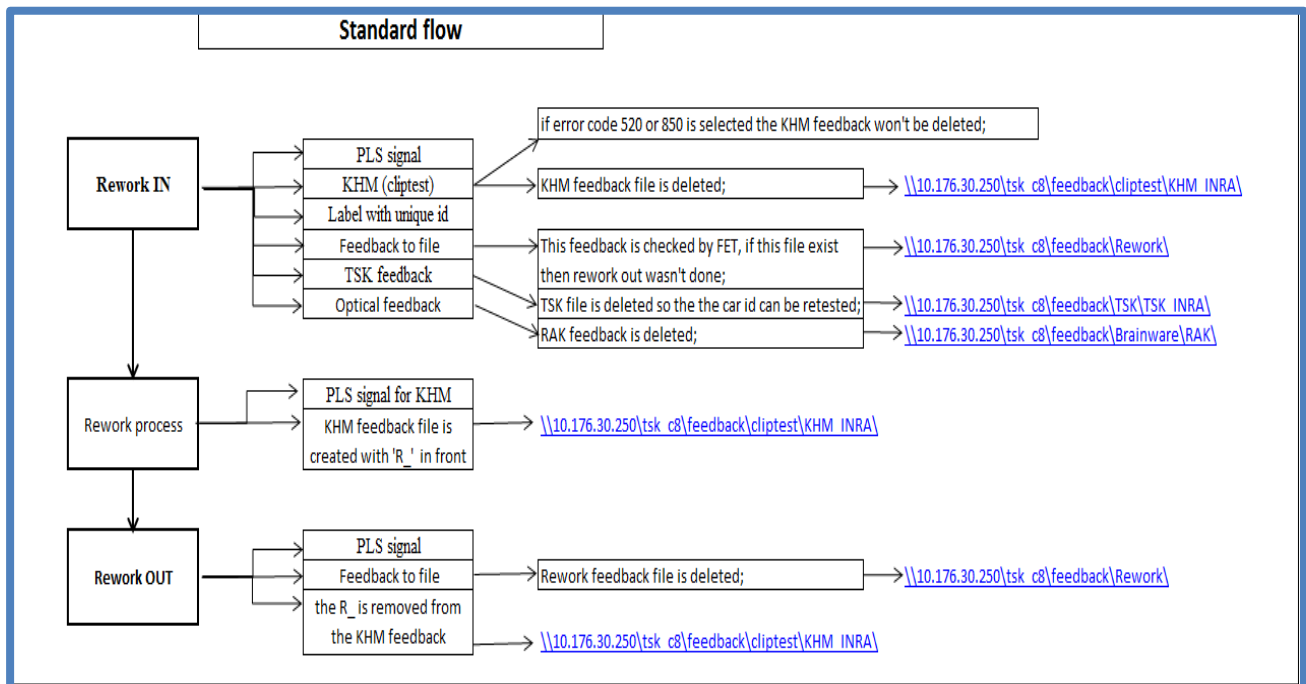

# SEBN STANDARD REWORK SYSTEM

