

Wavelength Measurement through Michelson Interferometry

Henry Shackleton*
MIT Department of Physics
(Dated: March 14, 2017)

Using a Michelson interferometer and oscilloscope, we compare interference patterns produced by the interferometer to changes in the relative distance travelled by the two components of a split light beam before recombining. This allows us to precisely calculate the wavelength of the light beam as 620 ± 36 nm.

A Michelson interferometer is a device where a beam of light can be split in two perpendicular directions, recombined, and then measured via a photodetector. By varying the length that one of the two split beams travels, one can produce interference patterns that can be detected by the photodetector. This setup was originally devised by Michelson in 1881 to test whether light propagated through an "aether," which could cause the light to travel more slowly in one direction than the other, thereby producing an interference pattern. His experiment, along with others of the time period, eventually showed that light travelled at the same speed irrespective of direction. This conclusion allowed the Michelson interferometer to be useful for other measurements, such as the one described here.

As variations in length will be the predominant contributor to interference patterns, by varying the length precisely via a PZT (Piezoelectric Transducer) we can detect with high precision the length changes that correspond to various interference patterns. This allows us to calculate the wavelength of the beam of light under study. Through this procedure, we are able to calculate the wavelength of the light beam used as 620 ± 36 nm.

I. THEORY

The primary theoretical background necessary for this experiment is understanding the process of combining two light beams. Although a full theory of light requires a description of the underlying quantum phenomena, for the purposes of light interference, we can treat light as a wave, described by some amplitude E_1 , a phase ϕ_1 , and an angular frequency ω .

$$E(t) = E_1 e^{i(\phi_1 - \omega t)} \quad (1)$$

The variable t denotes the time of interest. Although the full equation of a light wave will have some position dependence, for the purposes of this experiment, we will only be concerned with the time dependence of the wave at a fixed position. Combining two beams of light consists of superimposing the wave equations describing

them. To understand this mathematically, let us introduce a second equation to describe the second beam of light, with the same frequency ω but with a different amplitude E_2 and phase ϕ_2 . Adding these two equations together gives

$$E_T = E_1 e^{i(\phi_1 - \omega t)} + E_2 e^{i(\phi_2 - \omega t)} \quad (2)$$

The form of this combined wave depends on the difference between ϕ_1 and ϕ_2 . If ϕ_1 and ϕ_2 differ by a complete phase, $\phi_1 - \phi_2 = 2\pi n$ for some integer n , then the equation reduces to

$$E_T = (E_1 + E_2) e^{-i\omega t} \quad (3)$$

This is known as *constructive interference* - the amplitudes of the two waves add to each other. If ϕ_1 and ϕ_2 differ by half a phase, $\phi_1 - \phi_2 = (2n + 1)\pi$, then the equation instead reduces to

$$E_T = (E_1 - E_2) e^{i\omega t} \quad (4)$$

This is called *destructive interference*, as the amplitude of the two waves detract from each other. In the case of equal amplitude waves, $E_1 = E_2$, destructive interference results in a perfect cancellation of the two waves. An example of this is shown in 1.

Our photodetector does not measure the wave itself, but rather the *intensity*, I , of the wave. The intensity of a wave is given by taking the square of the wave and averaging it over time, which in the case of the two superimposed waves, gives

$$I \propto E_1^2 + E_2^2 + 2E_1 E_2 \cos(\phi_1 - \phi_2) \quad (5)$$

Constructive and destructive interference affect the intensity - with constructive interference, $\cos(\phi_1 - \phi_2) = 1$, and with destructive interference, $\cos(\phi_1 - \phi_2) = -1$.

In our setup, a beam splitter separates a light beam into two beams of equal amplitude, and then the two beams are combined at a later stage. A phase difference is induced by the different lengths that the two beams travel. The correspondence between the phase difference and length difference is determined by the wavelength λ of the beam. If one beam travels a distance of $2l_1$ before recombining, and the second beam travels a distance of $2l_2$, the phase difference is given as

$$\phi_2 - \phi_1 = \frac{4\pi}{\lambda} (l_2 - l_1) \quad (6)$$

* hshackle@mit.edu

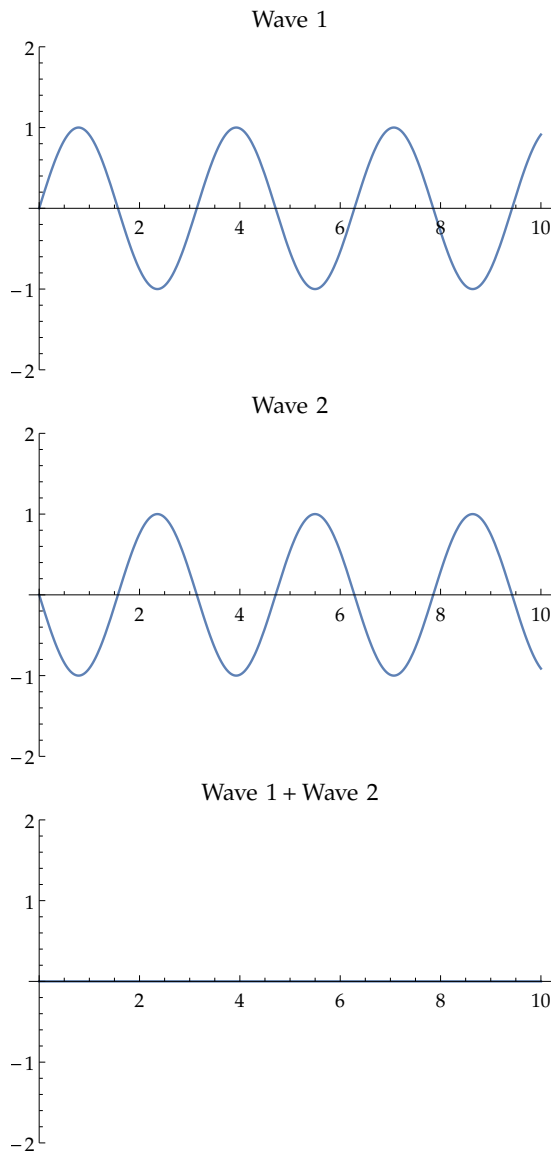


FIG. 1. An example of destructive interference with two waves of equal amplitude. When two waves with a relative phase offset of $(2n+1)\pi$ are superimposed, the two waves are cancelled out.

II. EXPERIMENTAL SETUP

The source of our light beam will be an orange laser, which emits a constant light source of a certain wavelength. A beam splitter is positioned along the trajectory of the beam at a 45 degree angle, which splits the beam into two beams of approximately equal amplitude, each travelling perpendicular to the other. One of the beams travels a length l_2 , is reflected by a mirror, and is sent back to be detected by a photodetector. The other beam travels a length l_1 and reaches a mirror connected to a PZT (piezoelectric transducer). The PZT is connected to a function generator, which supplies the PZT with a varying voltage in the form of a triangle waveform with

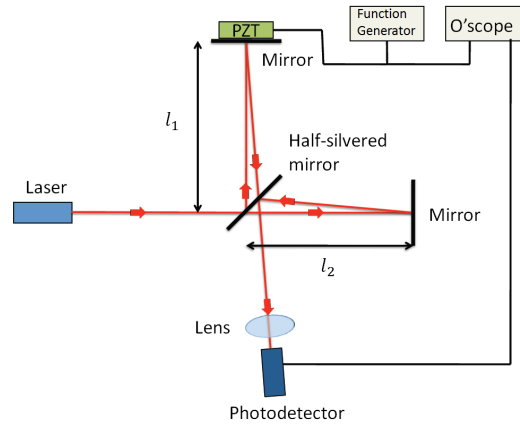


FIG. 2. A block diagram of our experimental setup, with lengths l_1 and l_2 indicating the distance travelled by each of the two light beams.

a peak-to-peak voltage of 10V and a frequency of 10Hz. The PZT translates these supplied voltages to spatial translations along the length of l_1 . The PZT used in this experiment has a response of the form $44.6 \pm 2.6 \text{ nm/V}$. As the voltage varies, the length that the beam of light travels to reach the mirror varies from $l_1 + \Delta$ to $l_1 - \Delta$, where Δ is some small displacement induced by the PZT. The function generator applied to the PZT is additionally connected to an oscilloscope, which allows us to read off the voltage being supplied to the PZT, and therefore the difference in length in the trajectory of the light beam.

Both light beams are reflected by the mirrors, and recombined at a photodetector, which measures the intensity of the beam. A crucial calibration step in this experiment is positioning the two mirrors so that the two beam align perfectly on the photodetector. Any deviations from this will reduce the signal measured. The photodetector is connected to the oscilloscope previously mentioned. This allows us to simultaneously measure the voltage supplied to the PZT - and in virtue of that, the displacement of the mirror attached to it - and the intensity of the resulting beam.

III. DATA ANALYSIS

Figure 3 gives an example form of a signal seen on our oscilloscope. At every maximum in the orange line - representing the intensity of the measured beam - complete constructive interference is taking place between the two beams. At every minimum, complete destructive interference is taking place. This change in interference is induced by the change in relative phase between the two beams, which is caused by the differences in length produced by the PZT. The change from one maxima to another, or the change from one minima to another, cor-

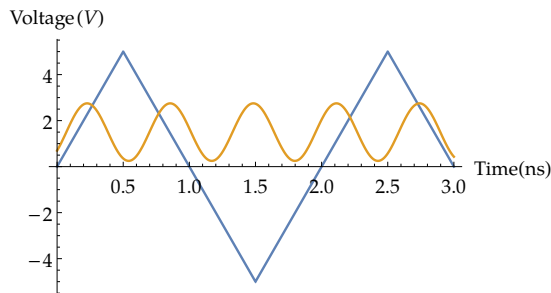


FIG. 3. An example reading of the oscilloscope, generated in Wolfram Mathematica. The blue line corresponds to the signal from the function generator, and the orange line corresponds to the intensity measured by the photodetector.

responds to a change in the length travelled by one of the beams equal to the wavelength. This is a direct consequence of equation (6). Therefore, calculating the voltage differences supplied at the PZT across maxima and minima, and then determining the displacement length corresponding to that voltage, we are able to determine the wavelength of the laser beam.

Over the course of taking measurements of this voltage difference, we will accumulate a distribution of values. Using this distribution, we can calculate a mean, along with some statistical uncertainty for this value. Using this value, we can use the response value of the PZT, with its associated uncertainty, to come to final conclusion and uncertainty of our laser's wavelength.

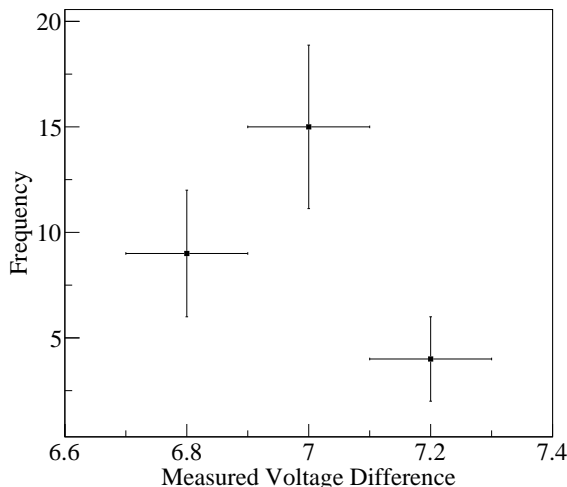


FIG. 4. A distribution of the measured voltage differences between minima and maxima of interference peaks, with associated uncertainties for the frequency counts.

In our experiment, we conducted 29 measurements of the voltage difference across maxima and minima, represented visually in 4. These measurements have associated uncertainty due to the oscilloscope measurements being taken from reading off the values by eye. Taking

the average of these measurements and calculating the uncertainty, we arrive at an average voltage difference of $6.96 \pm .12$ V. Converting this into length displacement, we conclude that the predicted wavelength of the laser is 620 ± 38 nm. This is within the visible spectrum, and roughly corresponds with the observed colour of the laser.

IV. CONCLUSION

Michelson interferometers allow one to detect interference patterns created through the relative phase difference of two laser beams. By varying this phase in a controlled manner and comparing this to the interference patterns recorded, we are able to determine the wavelength of the source laser with an uncertainty of less than 50 nanometers.

V. ACKNOWLEDGEMENTS

I would like to thank my 8.13 lab partner, Adin Hrnjic, for assisting with this experiment as well as providing invaluable guidance through the analysis of our data. Additionally, I would like to thank Rudy Garcia for additional guidance throughout the analysis of our data. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ip-

sum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mau-

ris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.