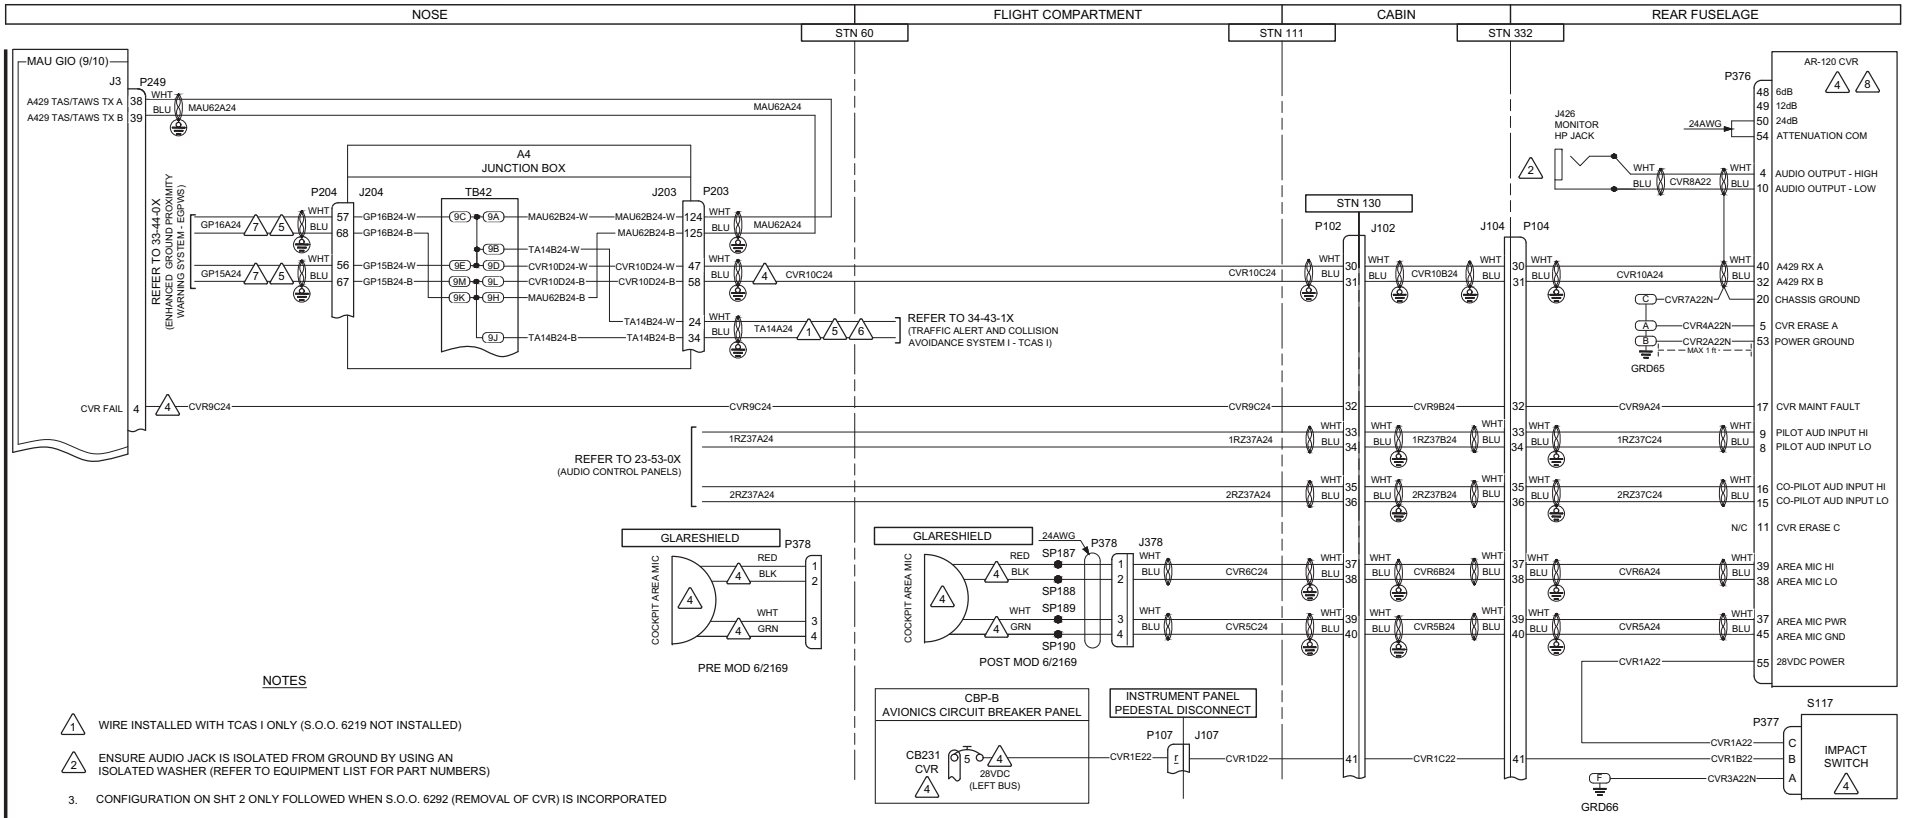


NOTES


1. WIRE INSTALLED WITH TCAS I ONLY (S.O.O. 6219 NOT INSTALLED)
2. ENSURE AUDIO JACK IS ISOLATED FROM GROUND BY USING AN ISOLATED WASHER (REFER TO EQUIPMENT LIST FOR PART NUMBERS)
3. CONFIGURATION ON SHT 2 ONLY FOLLOWED WHEN S.O.O. 6292 (REMOVAL OF CVR) IS INCORPORATED
4. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 (APEX SUPER-LITE) + S.O.O. 6384 (CVR INSTALLATION) INSTALL AS SHOWN.
5. S.O.O. 6388 (APEX SUPER-LITE) CAP AND STOW.
6. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 + S.O.O. 6382 (TCAS I INSTALLATION) INSTALL AS SHOWN.
7. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 + S.O.O. 6387 (EGPWS INSTALLATION) INSTALL AS SHOWN.
8. S.O.O. 6388 REMOVE COMPONENT. CAP AND STOW CONNECTORS.

COCKPIT VOICE RECORDER (CVR)

SHEET 1 OF 2

C6N1004-62 ISSUE NO. 1 2 3

This Page Intentionally Left Blank

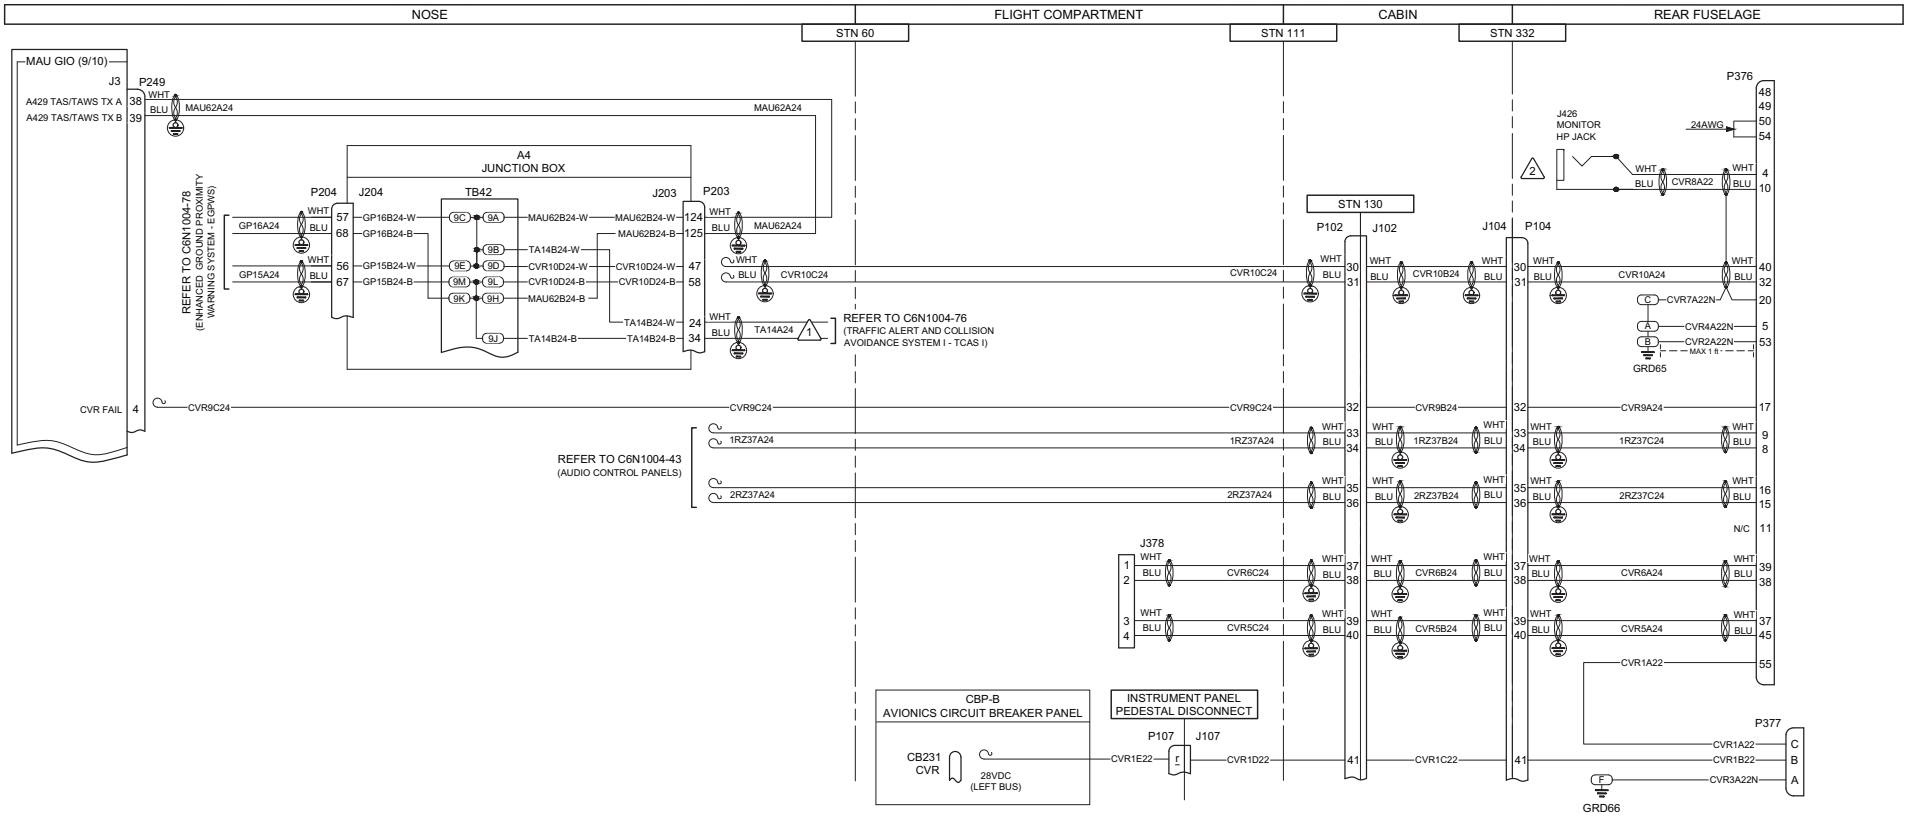


COCKPIT VOICE RECORDER (CVR)

SHEET 2 OF 2

C6N1004-62 ISSUE NO. 1 2 3

This Page Intentionally Left Blank

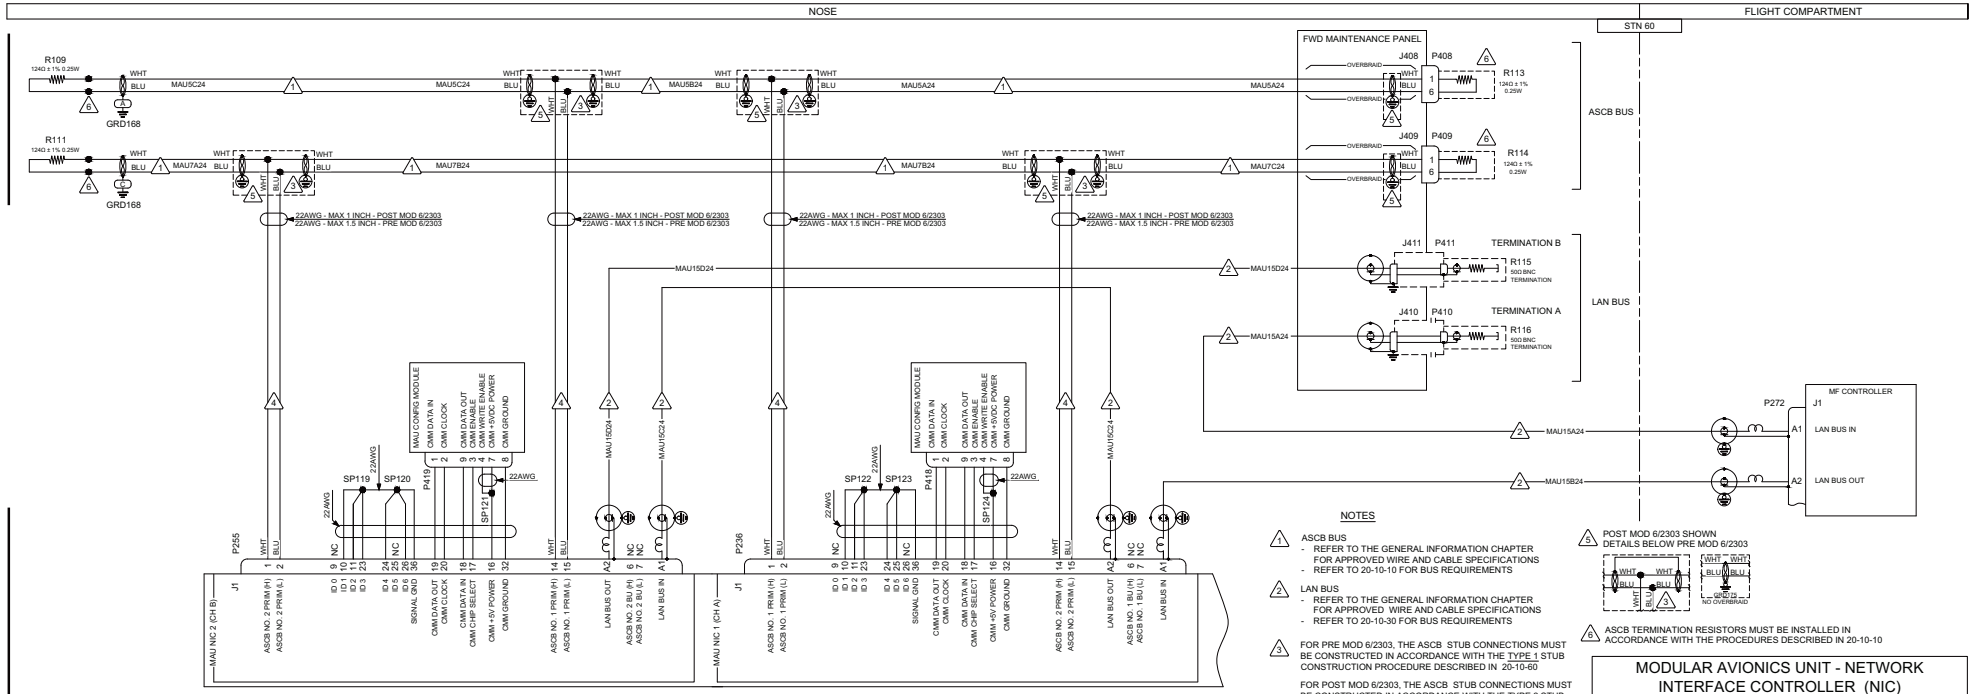

NOTES

1. ASCB BUS
   - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
   - REFER TO 20-10-10 FOR BUS REQUIREMENTS
2. LAN BUS
   - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
   - REFER TO 20-10-30 FOR BUS REQUIREMENTS
3. FOR PRE MOD 6/2303, THE ASCB STUB CONNECTIONS MUST BE CONSTRUCTED IN ACCORDANCE WITH THE TYPE 1 STUB CONSTRUCTION PROCEDURE DESCRIBED IN 20-10-60

   FOR POST MOD 6/2303, THE ASCB STUB CONNECTIONS MUST BE CONSTRUCTED IN ACCORDANCE WITH THE TYPE 2 STUB CONSTRUCTION PROCEDURE DESCRIBED IN 20-10-60
4. THINWALL WIRE (REFER TO GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)
5. POST MOD 6/2303 SHOWN
   DETAILS BELOW PRE MOD 6/2303

6. ASCB TERMINATION RESISTORS MUST BE INSTALLED IN ACCORDANCE WITH THE PROCEDURES DESCRIBED IN 20-10-10


MODULAR AVIONICS UNIT - NETWORK INTERFACE CONTROLLER (NIC)

SHEET 1 OF 1

C6N1004-63D ISSUE NO. 1 2 3

This Page Intentionally Left Blank

NOSE

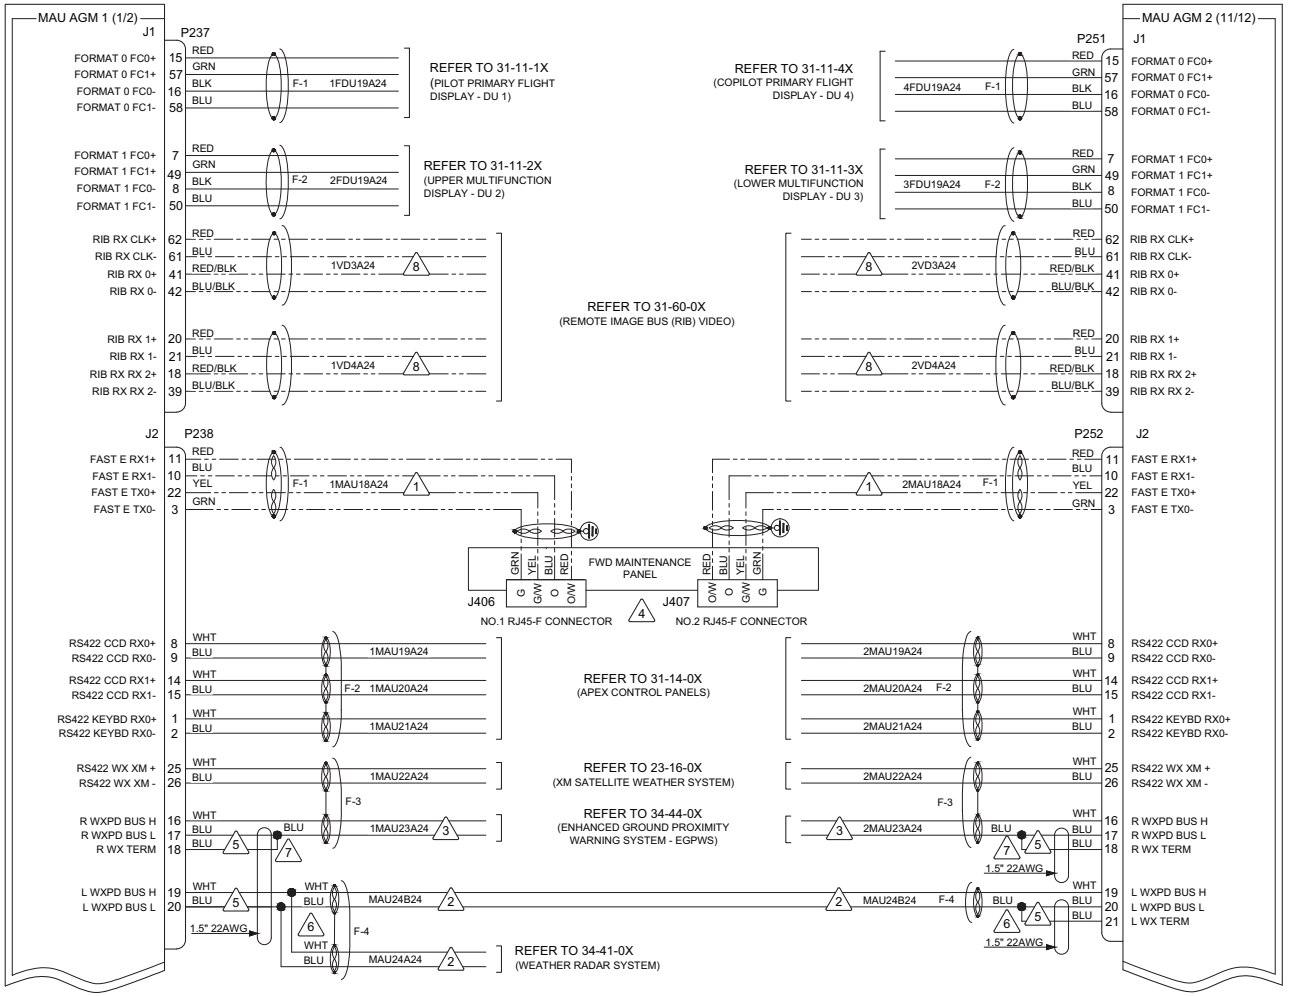

NOTES

1. ETHERNET CABLE
   - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
   CABLES INSTALLED PRE MOD 6/2188 ONLY

2. WEATHER RADAR PICTURE BUS
   - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
   - REFER TO 20-10-20 FOR BUS REQUIREMENTS

3. TERRAIN PICTURE BUS
   - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
   - REFER TO 20-10-20 FOR BUS REQUIREMENTS

4. RJ45 CONNECTORS (J406, J407) ARE LABELED WITH AN 'A' AND 'B' COLOUR CODE. FOR THIS INSTALLATION FOLLOW THE 'A' COLOUR CODE
   CONNECTORS INSTALLED PRE MOD 6/2188 ONLY

5. THINWALL WIRE (REFER TO GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)

6. THE WEATHER RADAR PICTURE BUS STUB CONNECTION MUST BE CONSTRUCTED IN ACCORDANCE WITH THE TYPE 1 STUB CONSTRUCTION PROCEDURE DESCRIBED IN CHAPTER 20-10-60.

7. THE SPLICES ATTACHING TO THE WEATHER RADAR AND TERRAIN PICTURE BUSSES MUST BE INSTALLED IN A SIMILAR MANNER AS THE PICTURE BUS STUB SPLICES (REFERENCE CHAPTER 20-10-60 - TYPE 1 STUB CONSTRUCTION).

8. WIRE INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6212 ONLY (REMOTE IMAGE BUS VIDEO)


MODULAR AVIONICS UNIT - ADVANCED GRAPHICS MODULE (AGM)

SHEET 1 OF 1

C6N1004-64E	ISSUE NO.	1	2	3	4				

This Page Intentionally Left Blank

NOSE

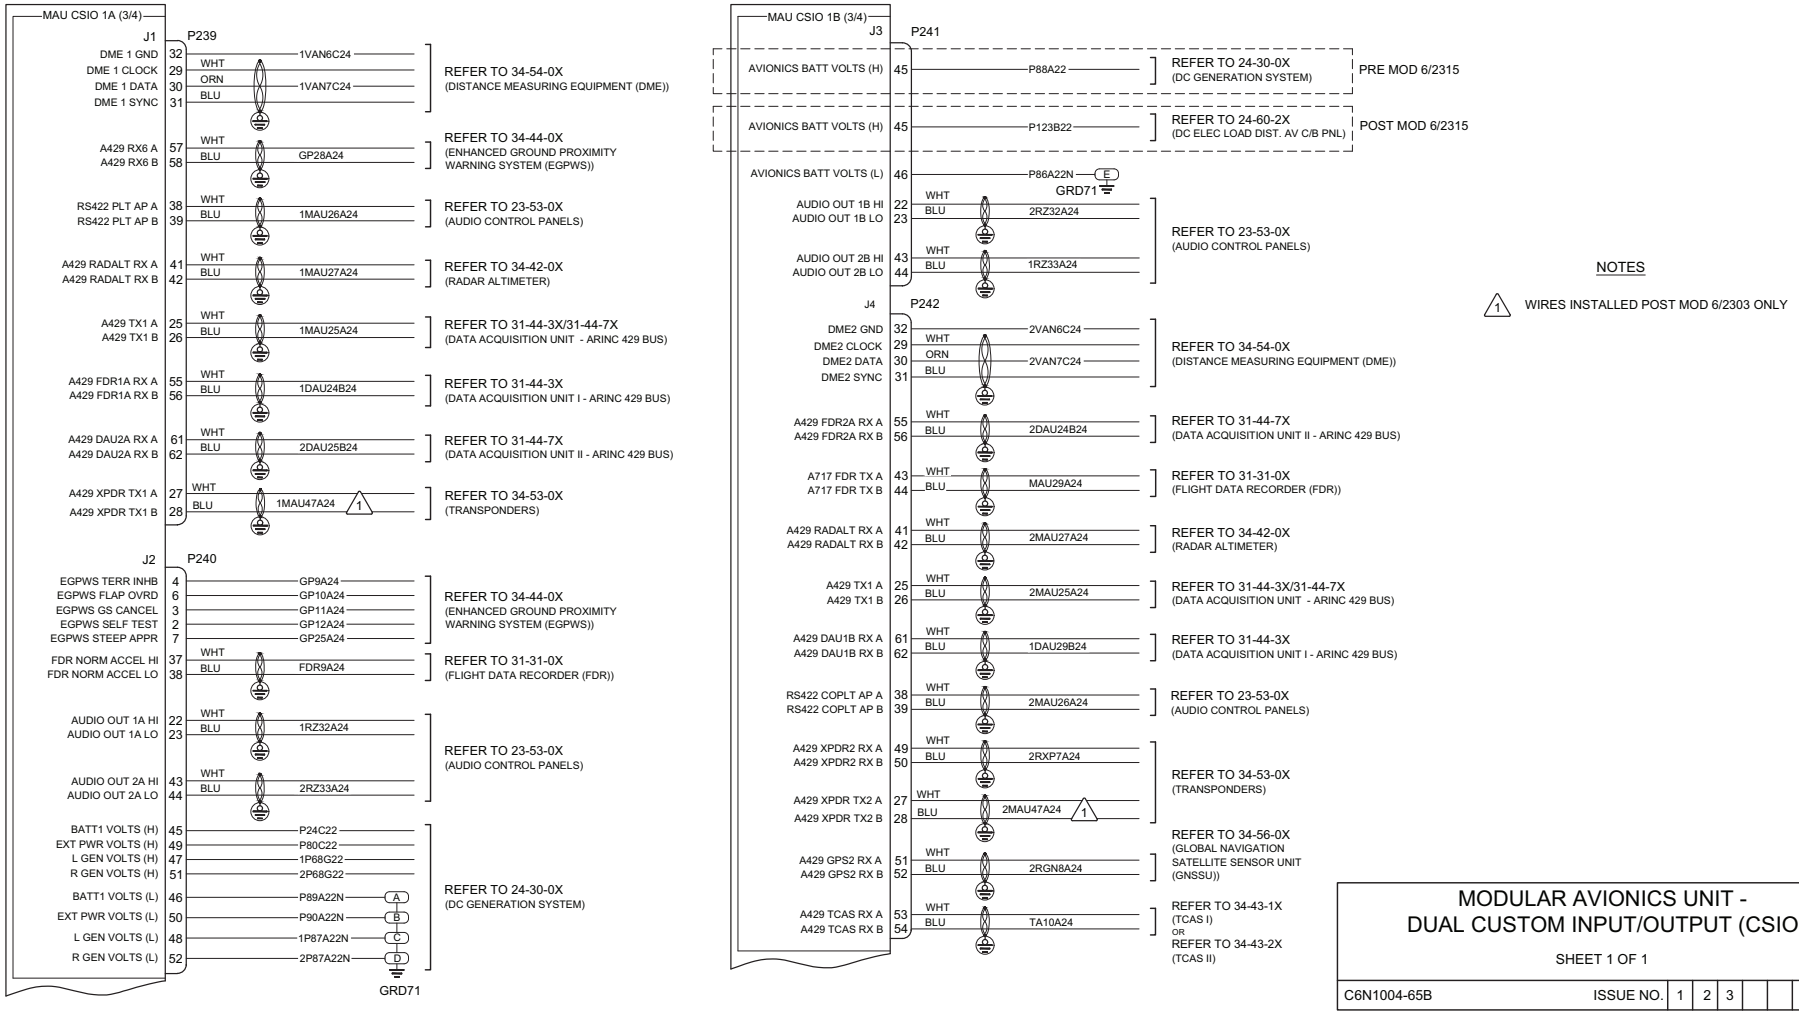

NOTES

1 WIRES INSTALLED POST MOD 6/2303 ONLY


MODULAR AVIONICS UNIT - DUAL CUSTOM INPUT/OUTPUT (CSIO)

SHEET 1 OF 1

C6N1004-65B	ISSUE NO.	1	2	3					

This Page Intentionally Left Blank

NOSE

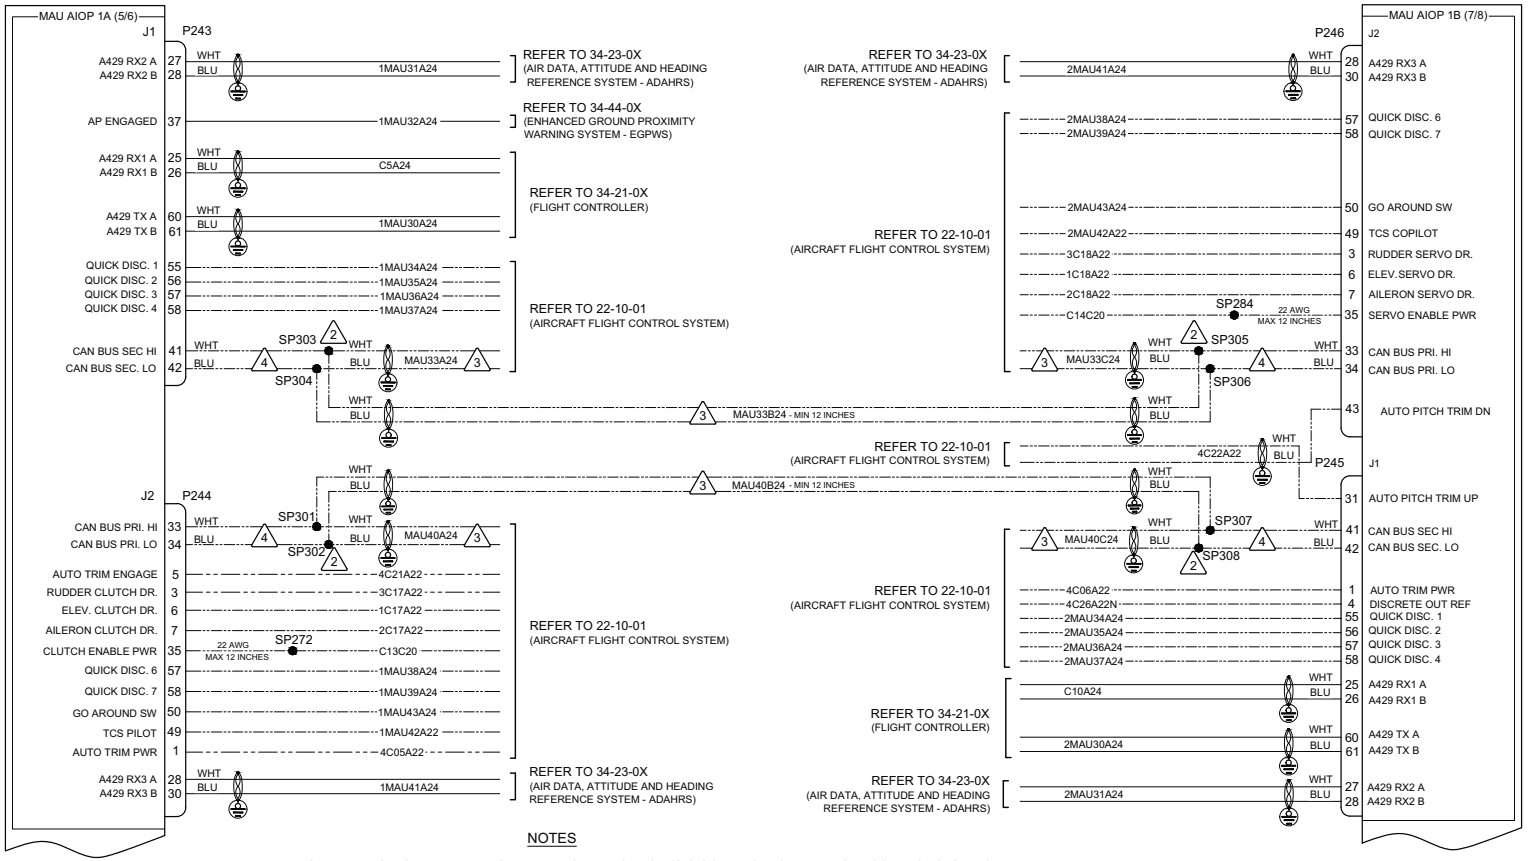

NOTES

1. DASHED WIRES INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6221 (AIRCRAFT FLIGHT CONTROL SYSTEM)

2. THE CAN BUS STUB CONNECTIONS AT THE AIOP MUST BE CONSTRUCTED IN ACCORDANCE WITH THE TYPE 2 STUB CONSTRUCTION PROCEDURE DESCRIBED IN CHAPTER 20-10-60

3. AUTOPILOT CAN BUS
- REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
- REFER TO 20-10-50 FOR AFCS CAN BUS REQUIREMENTS

4. THINWALL WIRE - **1.5 INCH MAX**
- REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS


MODULAR AVIONICS UNIT-
ACTUATOR INPUT/OUTPUT (AIOP)

SHEET 1 OF 1

C6N1004-66D ISSUE NO. 1 2

This Page Intentionally Left Blank

NOSE

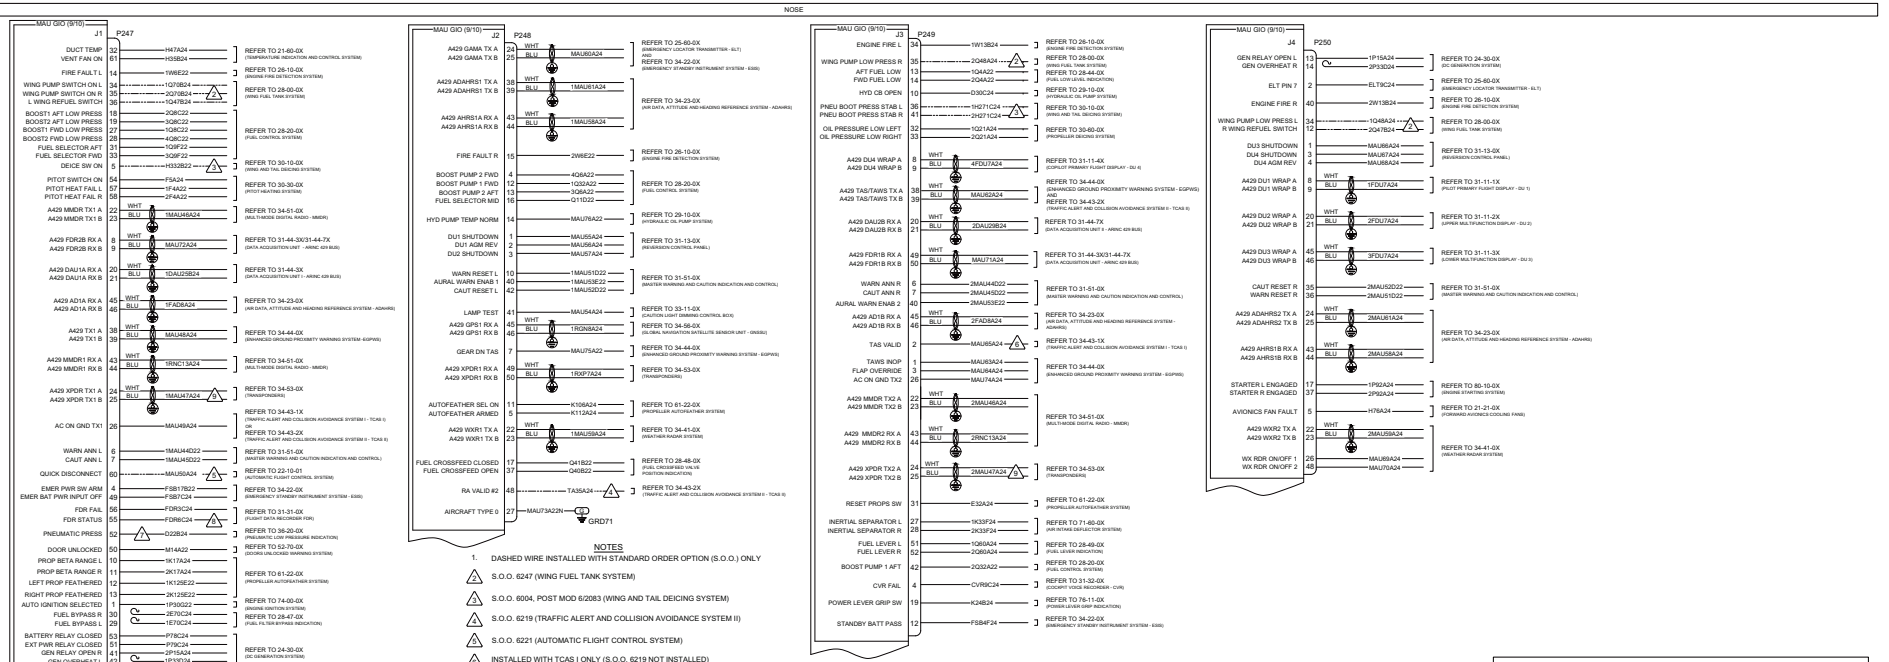

NOTES


1. DASHED WIRE INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) ONLY
2. S.O.O. 6247 (WING FUEL TANK SYSTEM)
3. S.O.O. 6004, POST MOD 6/2083 (WING AND TAIL DEICING SYSTEM)
4. S.O.O. 6219 (TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM II)
5. S.O.O. 6221 (AUTOMATIC FLIGHT CONTROL SYSTEM)
6. INSTALLED WITH TCAS I ONLY (S.O.O. 6219 NOT INSTALLED)
7. WIRE IS CAPPED AND STOWED WHEN S.O.O. 6004, POST MOD 6/2083 (WING AND TAIL DEICING SYSTEM) IS NOT INSTALLED
8. WIRE IS CAPPED AND STOWED PRE MOD 6/2303
9. WIRE IS RESTRICTED TO PRE MOD 6/2303

MODULAR AVIONICS UNIT - DUAL
GENERIC INPUT/OUTPUT (GIO)

SHEET 1 OF 1

C6N1004-67C ISSUE NO. 1 2 3

This Page Intentionally Left Blank

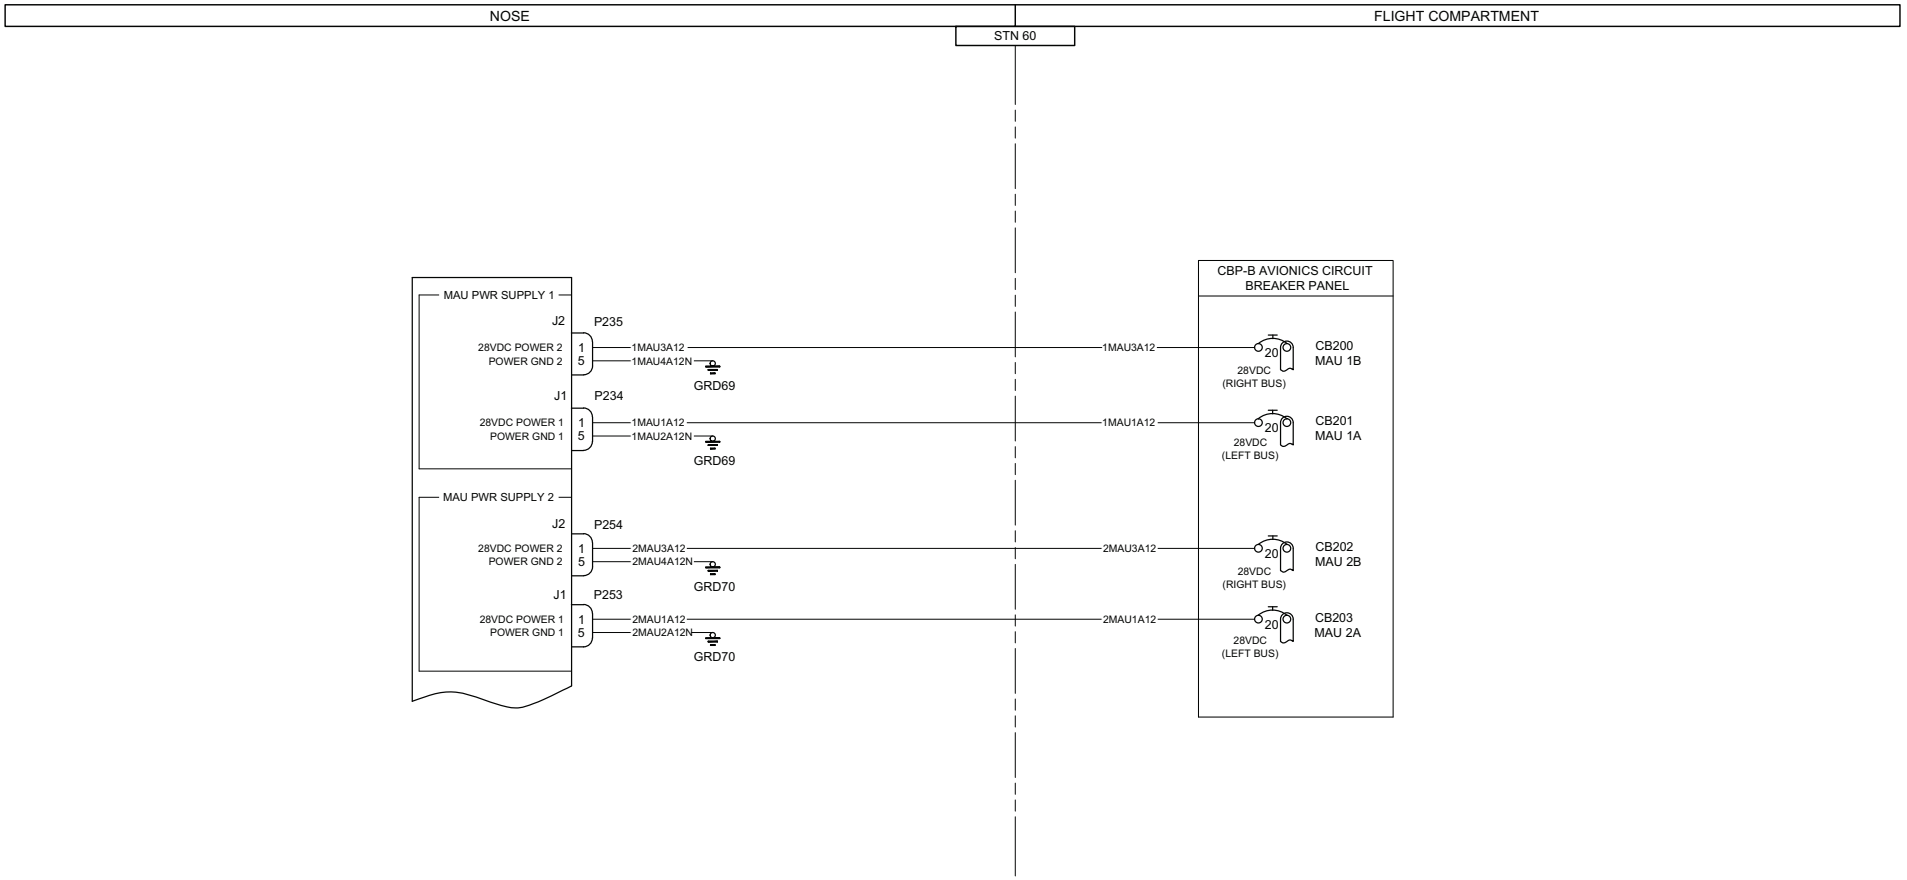


MODULAR AVIONICS UNIT - POWER SUPPLIES

SHEET 1 OF 1

C6N1004-68 ISSUE NO. 1

This Page Intentionally Left Blank

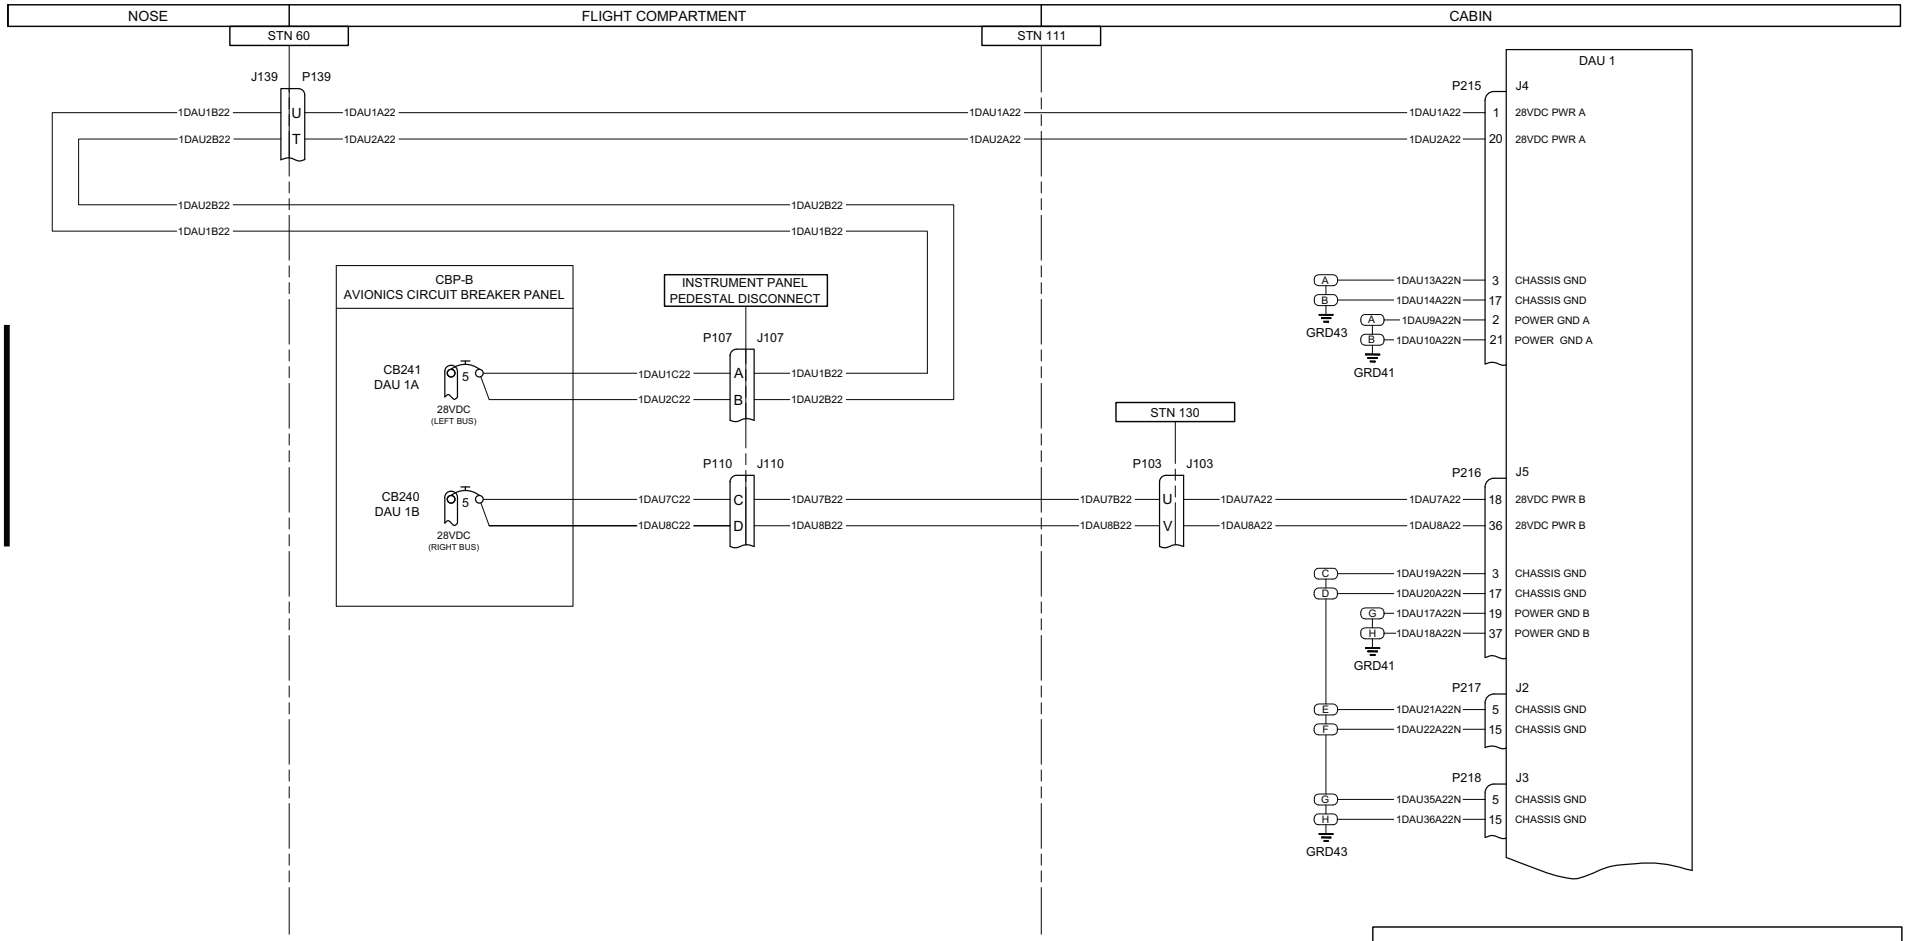


DATA ACQUISITION UNIT I - POWER

SHEET 1 OF 1

C6N1004-95B	ISSUE NO.	1	2							

This Page Intentionally Left Blank

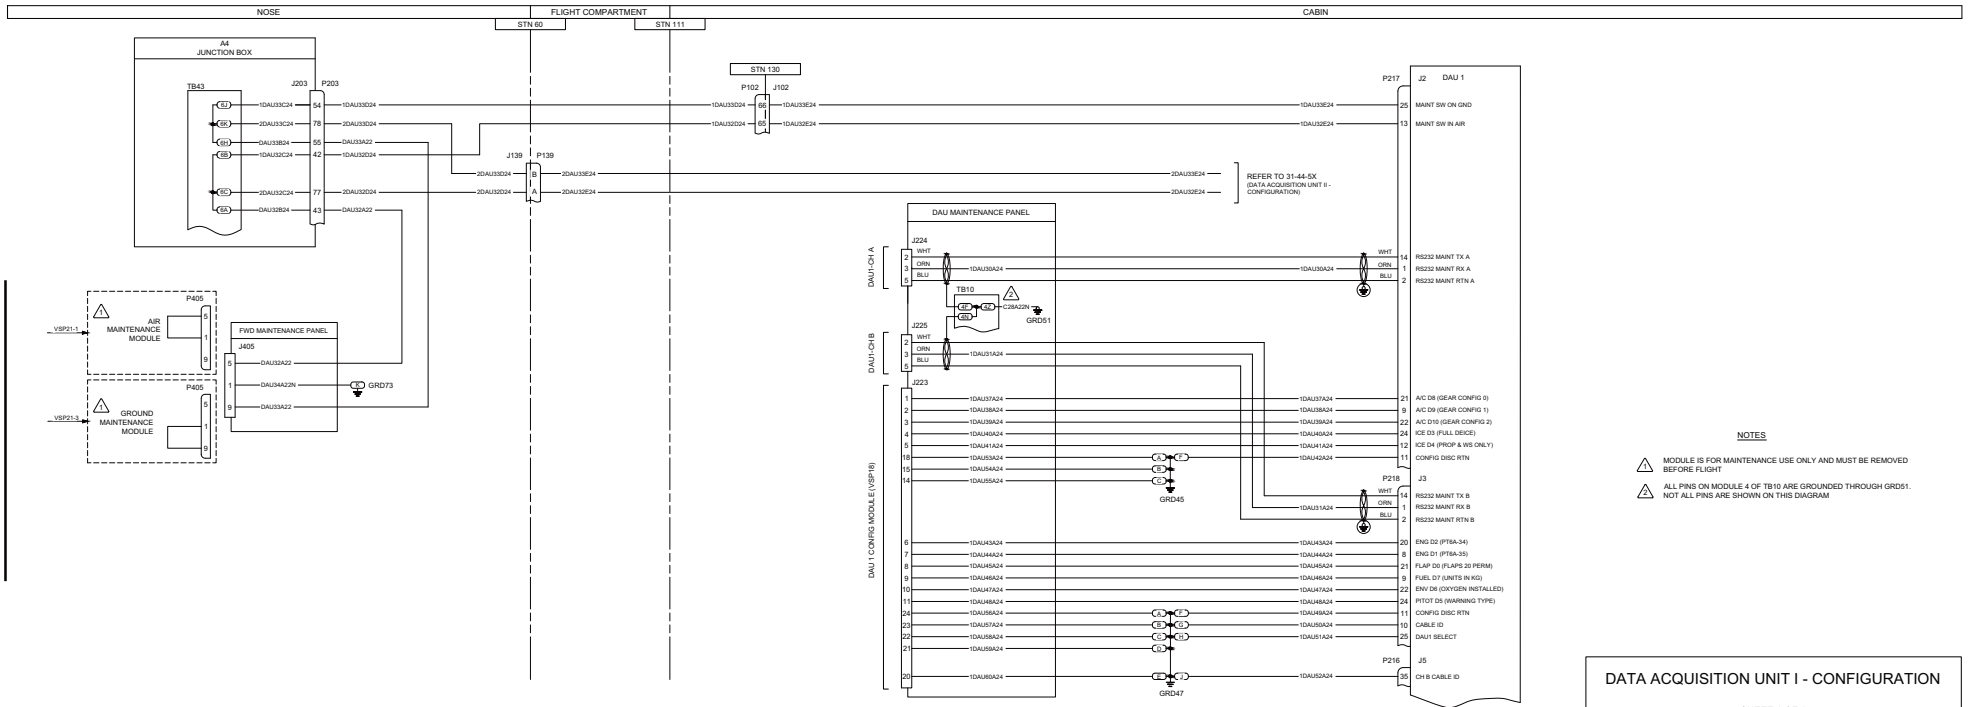


NOTES

1. MODULE IS FOR MAINTENANCE USE ONLY AND MUST BE REMOVED BEFORE FLIGHT
2. ALL PINS ON MODULE 4 OF TB10 ARE GROUNDED THROUGH GRD51. NOT ALL PINS ARE SHOWN ON THIS DIAGRAM

DATA ACQUISITION UNIT I - CONFIGURATION									
SHEET 1 OF 1									
C6N1004-96A	ISSUE NO.	1	2						

This Page Intentionally Left Blank

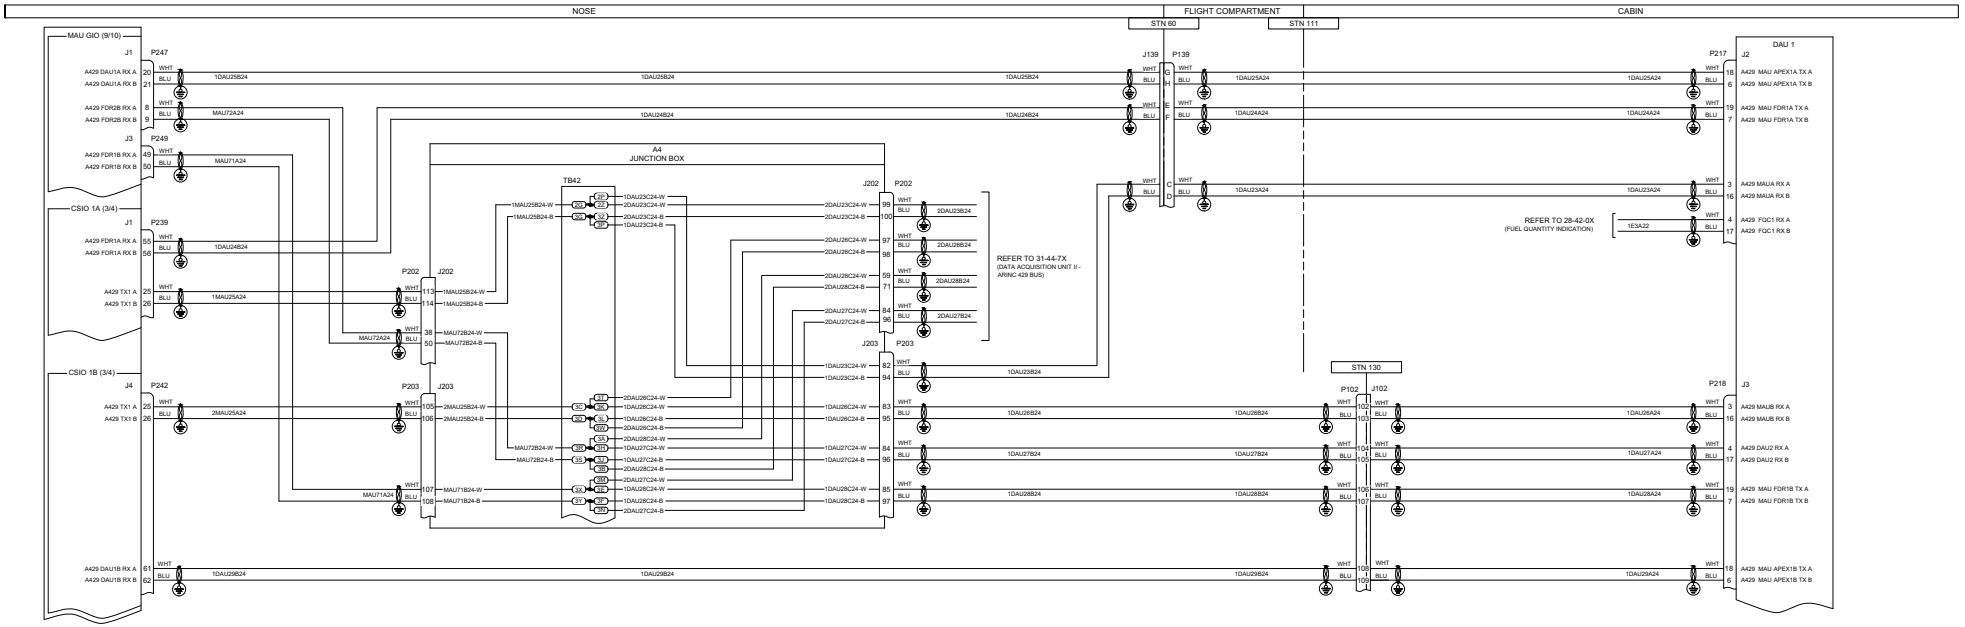


DATA ACQUISITION UNIT I - ARINC 429 BUS

SHEET 1 OF 1

C6N1004-97 ISSUE NO. 1

This Page Intentionally Left Blank

CABIN

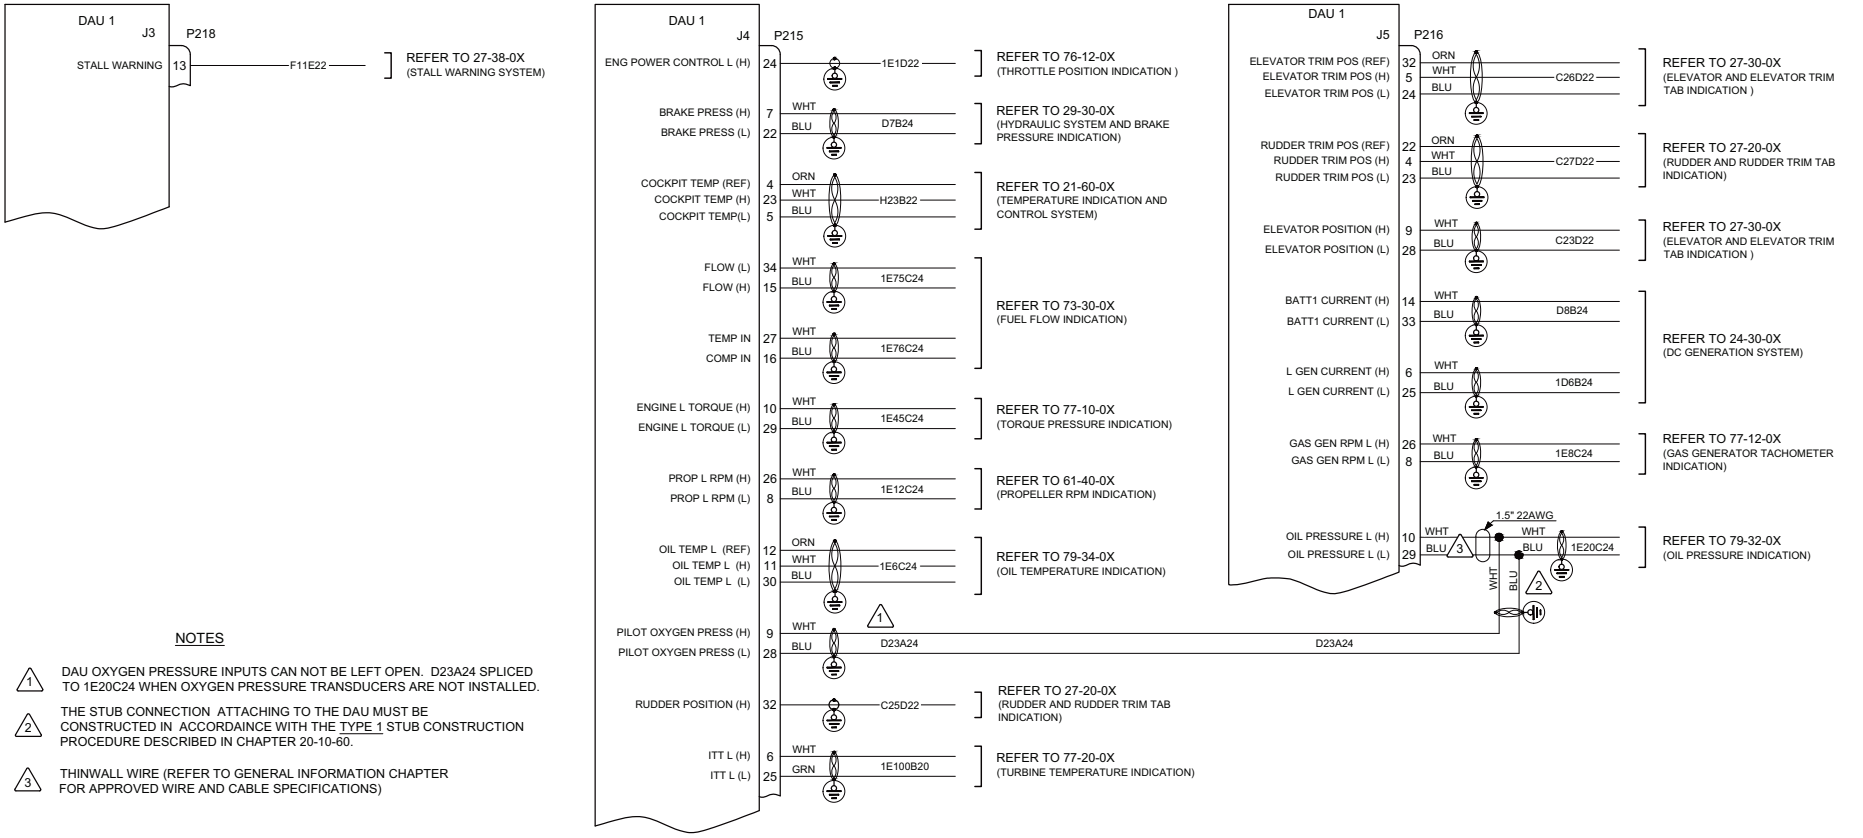

NOTES


1. DAU OXYGEN PRESSURE INPUTS CAN NOT BE LEFT OPEN. D23A24 SPLICED TO 1E20C24 WHEN OXYGEN PRESSURE TRANSDUCERS ARE NOT INSTALLED.
2. THE STUB CONNECTION ATTACHING TO THE DAU MUST BE CONSTRUCTED IN ACCORDAINCE WITH THE TYPE 1 STUB CONSTRUCTION PROCEDURE DESCRIBED IN CHAPTER 20-10-60.
3. THINWALL WIRE (REFER TO GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)

DATA ACQUISITION UNIT I - AIRCRAFT SYSTEM INPUTS

SHEET 1 OF 1

C6N1004-98B ISSUE NO. 1 2 3

This Page Intentionally Left Blank

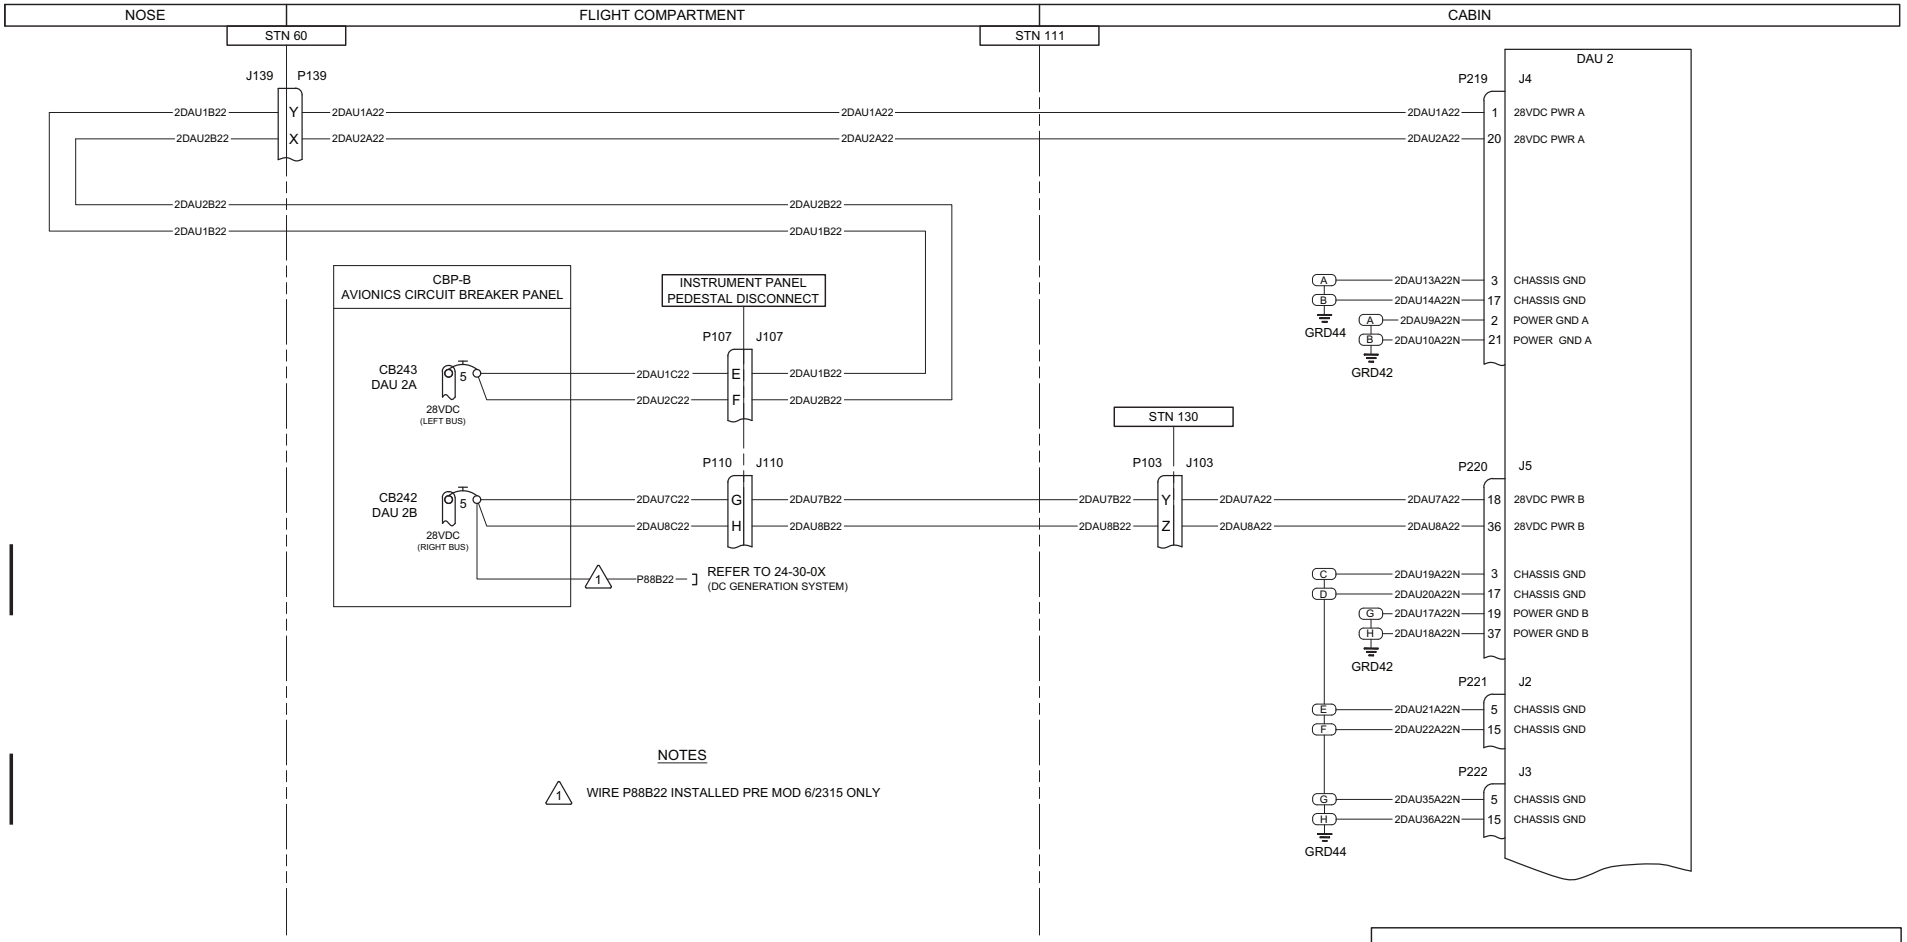


DATA ACQUISITION UNIT II - POWER

SHEET 1 OF 1

C6N1004-99B ISSUE NO. 1 2 3

This Page Intentionally Left Blank

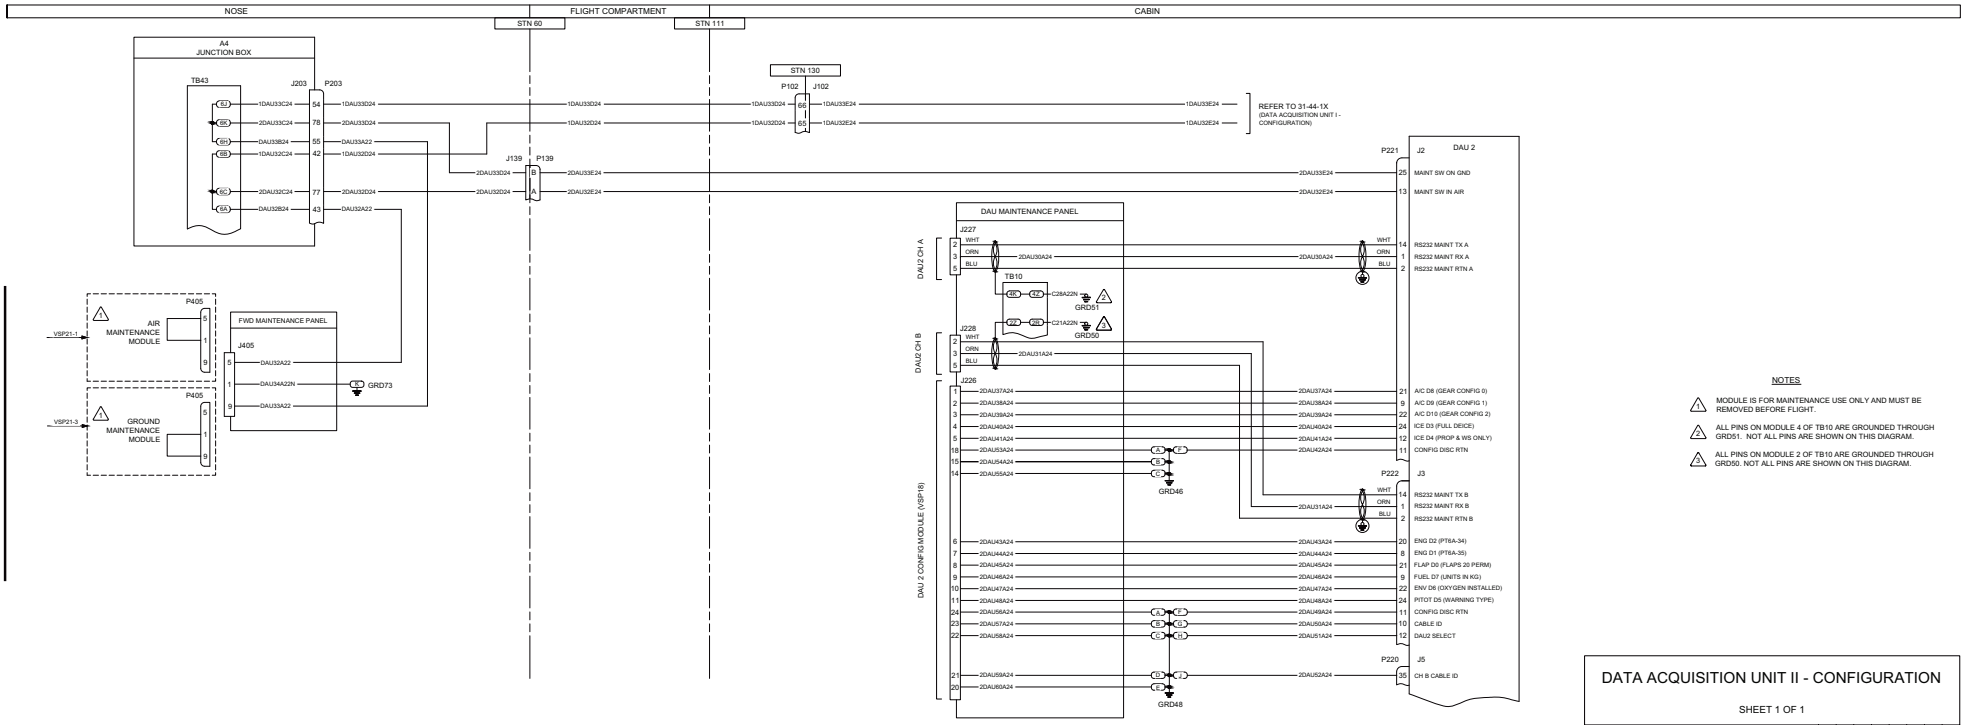


NOTES

1. MODULE IS FOR MAINTENANCE USE ONLY AND MUST BE REMOVED BEFORE FLIGHT.
2. ALL PINS ON MODULE 4 OF TB10 ARE GROUNDED THROUGH GRD51. NOT ALL PINS ARE SHOWN ON THIS DIAGRAM.
3. ALL PINS ON MODULE 2 OF TB10 ARE GROUNDED THROUGH GRD50. NOT ALL PINS ARE SHOWN ON THIS DIAGRAM.

DATA ACQUISITION UNIT II - CONFIGURATION									
SHEET 1 OF 1									
C6N1004-100A	ISSUE NO.	1	2						

This Page Intentionally Left Blank

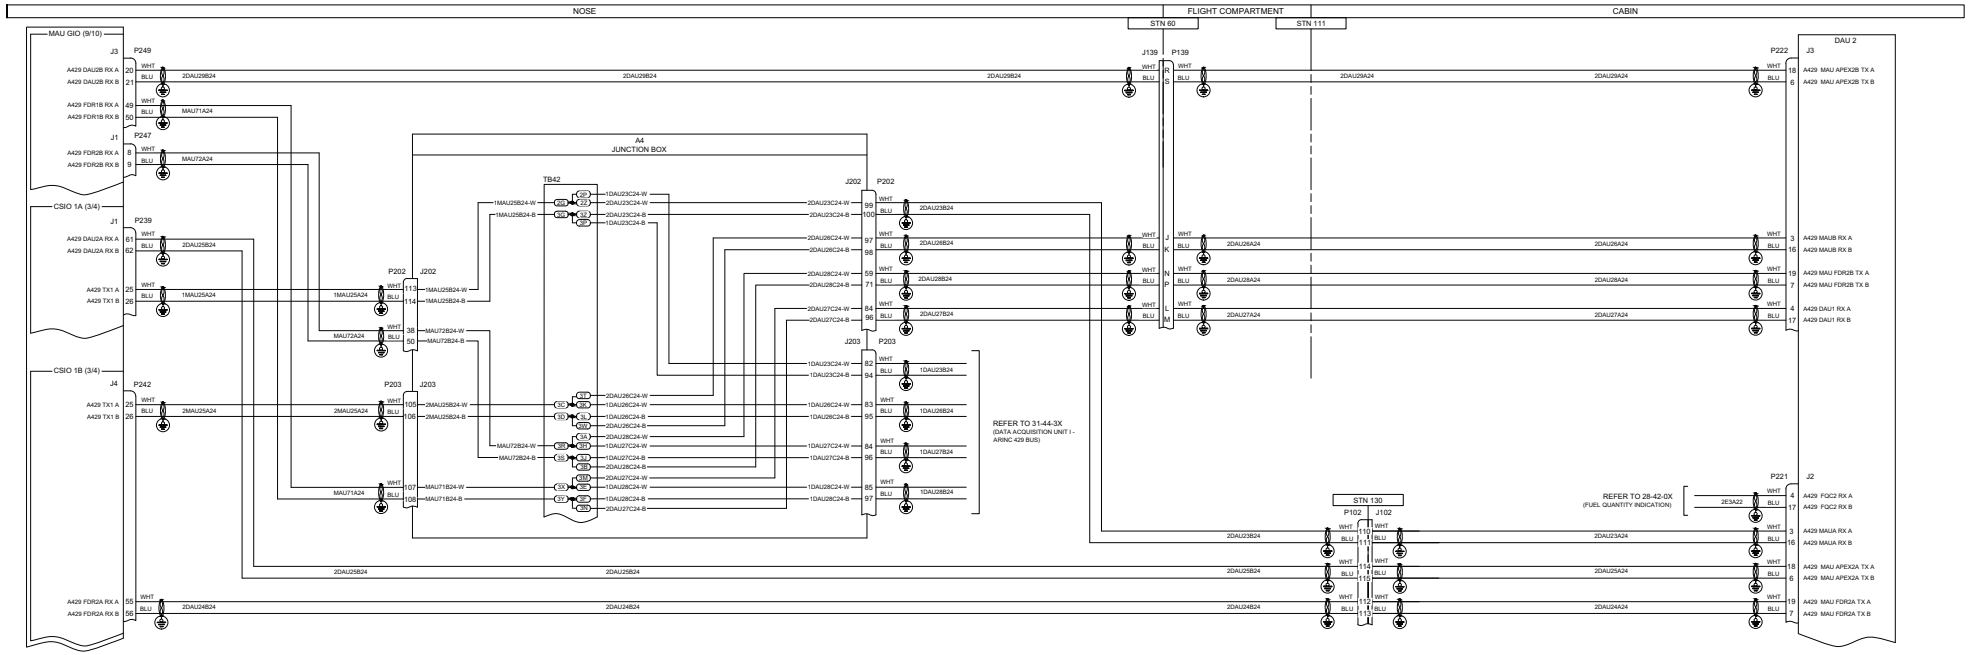


DATA ACQUISITION UNIT II - ARINC 429 BUS

SHEET 1 OF 1

C6N1004-101 ISSUE NO. 1

This Page Intentionally Left Blank

CABIN

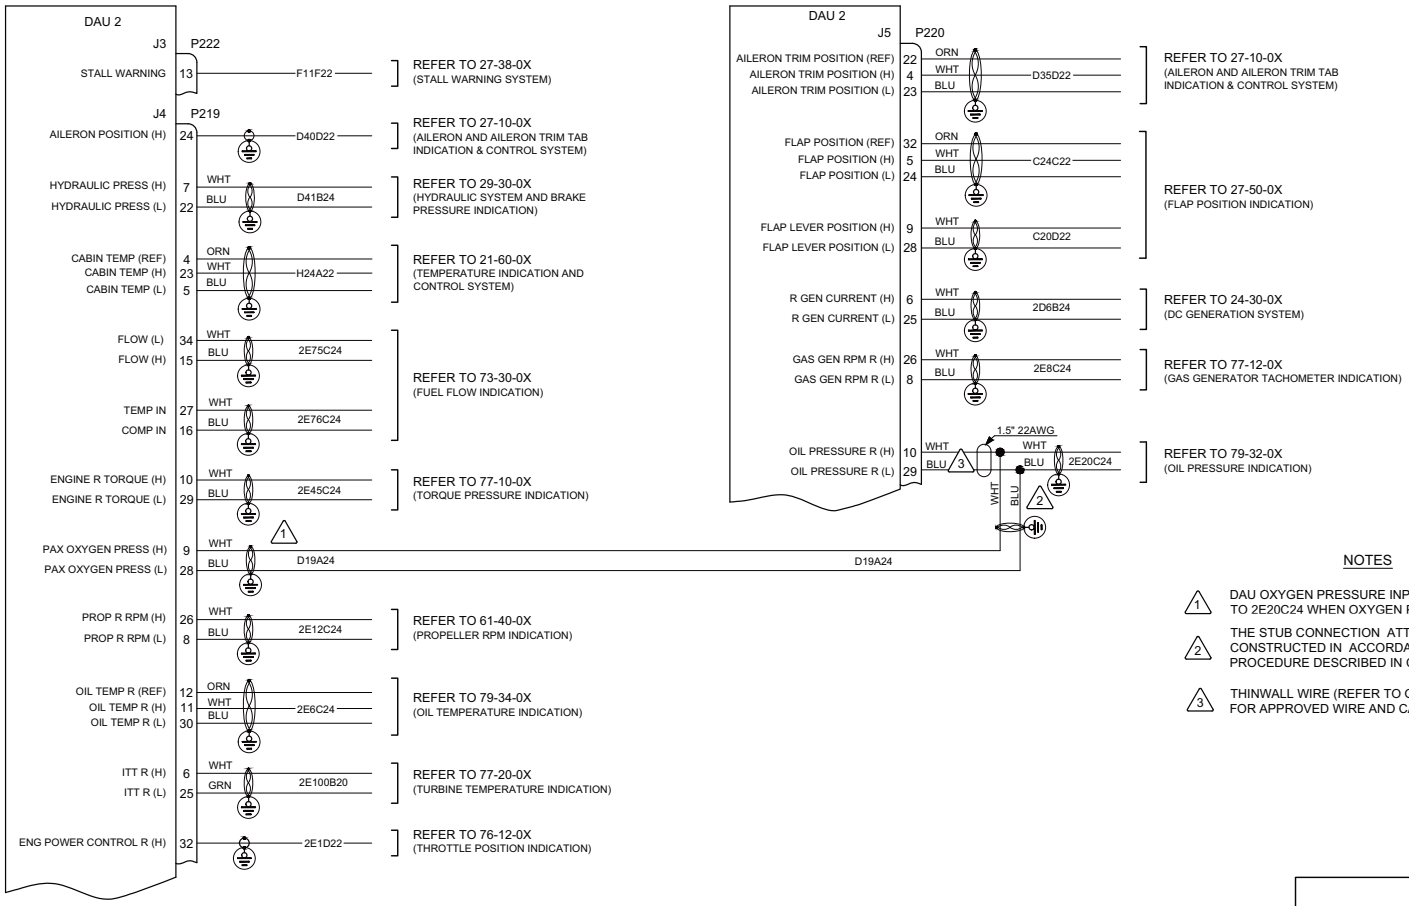

NOTES


1. DAU OXYGEN PRESSURE INPUTS CAN NOT BE LEFT OPEN. D19A24 SPLICED TO 2E20C24 WHEN OXYGEN PRESSURE TRANSDUCERS ARE NOT INSTALLED
2. THE STUB CONNECTION ATTACHING TO THE DAU MUST BE CONSTRUCTED IN ACCORDANCE WITH THE TYPE 1 STUB CONSTRUCTION PROCEDURE DESCRIBED IN CHAPTER 20-10-60.
3. THINWALL WIRE (REFER TO GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)

DATA ACQUISITION UNIT II - AIRCRAFT SYSTEM INPUTS

SHEET 1 OF 1

C6N1004-102B	ISSUE NO.	1	2	3						

This Page Intentionally Left Blank

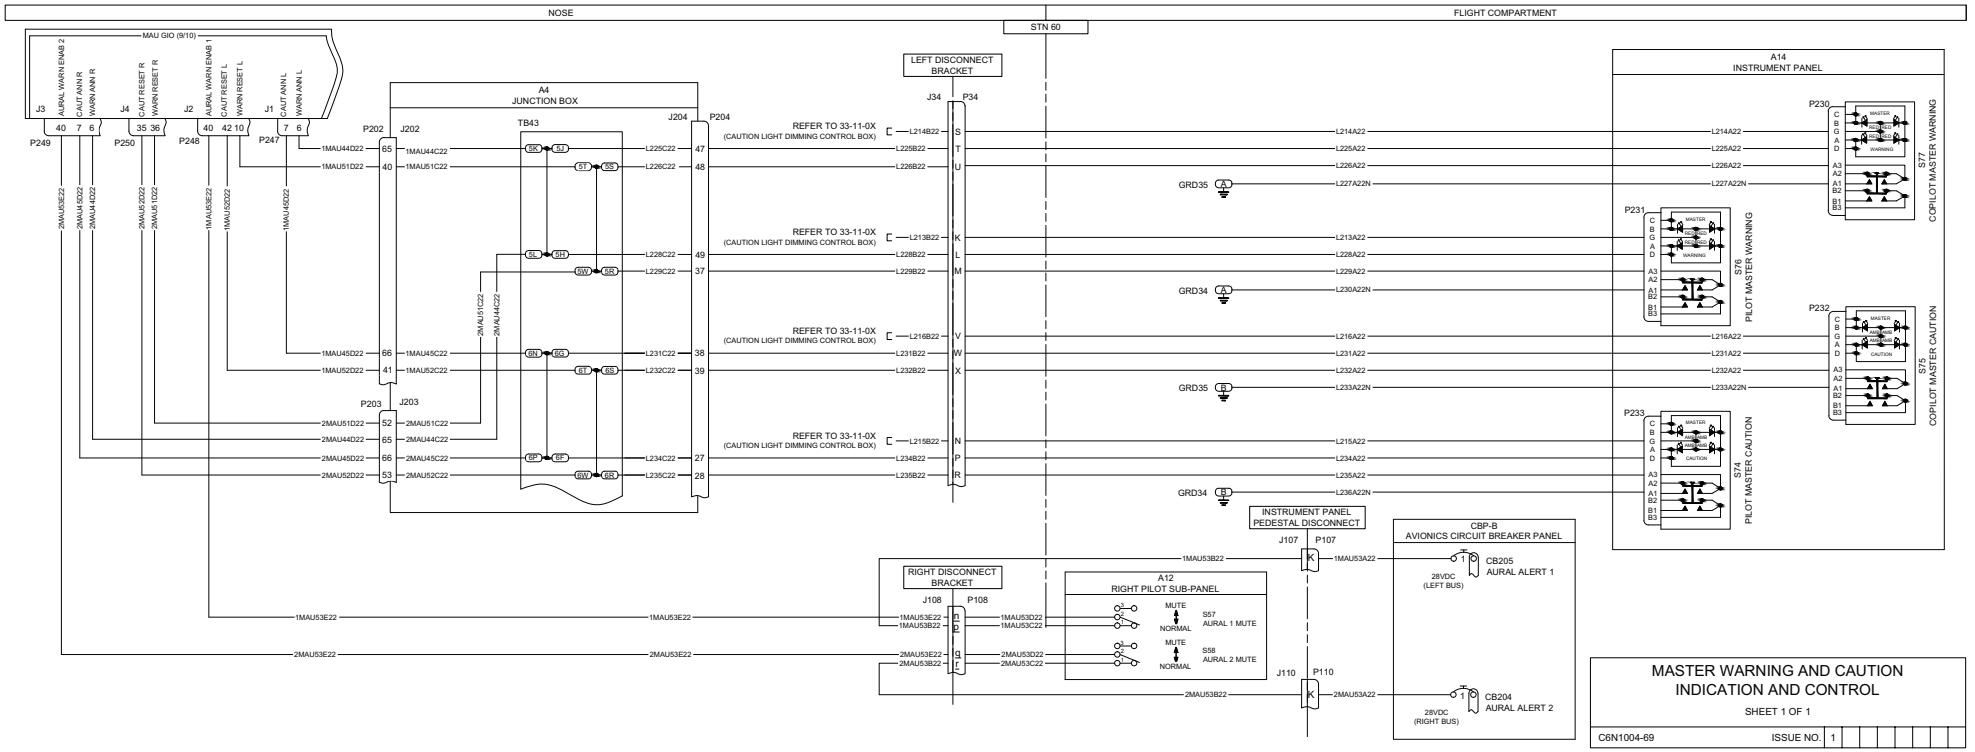


MASTER WARNING AND CAUTION INDICATION AND CONTROL

SHEET 1 OF 1

C6N1004-69 ISSUE NO. 1

This Page Intentionally Left Blank

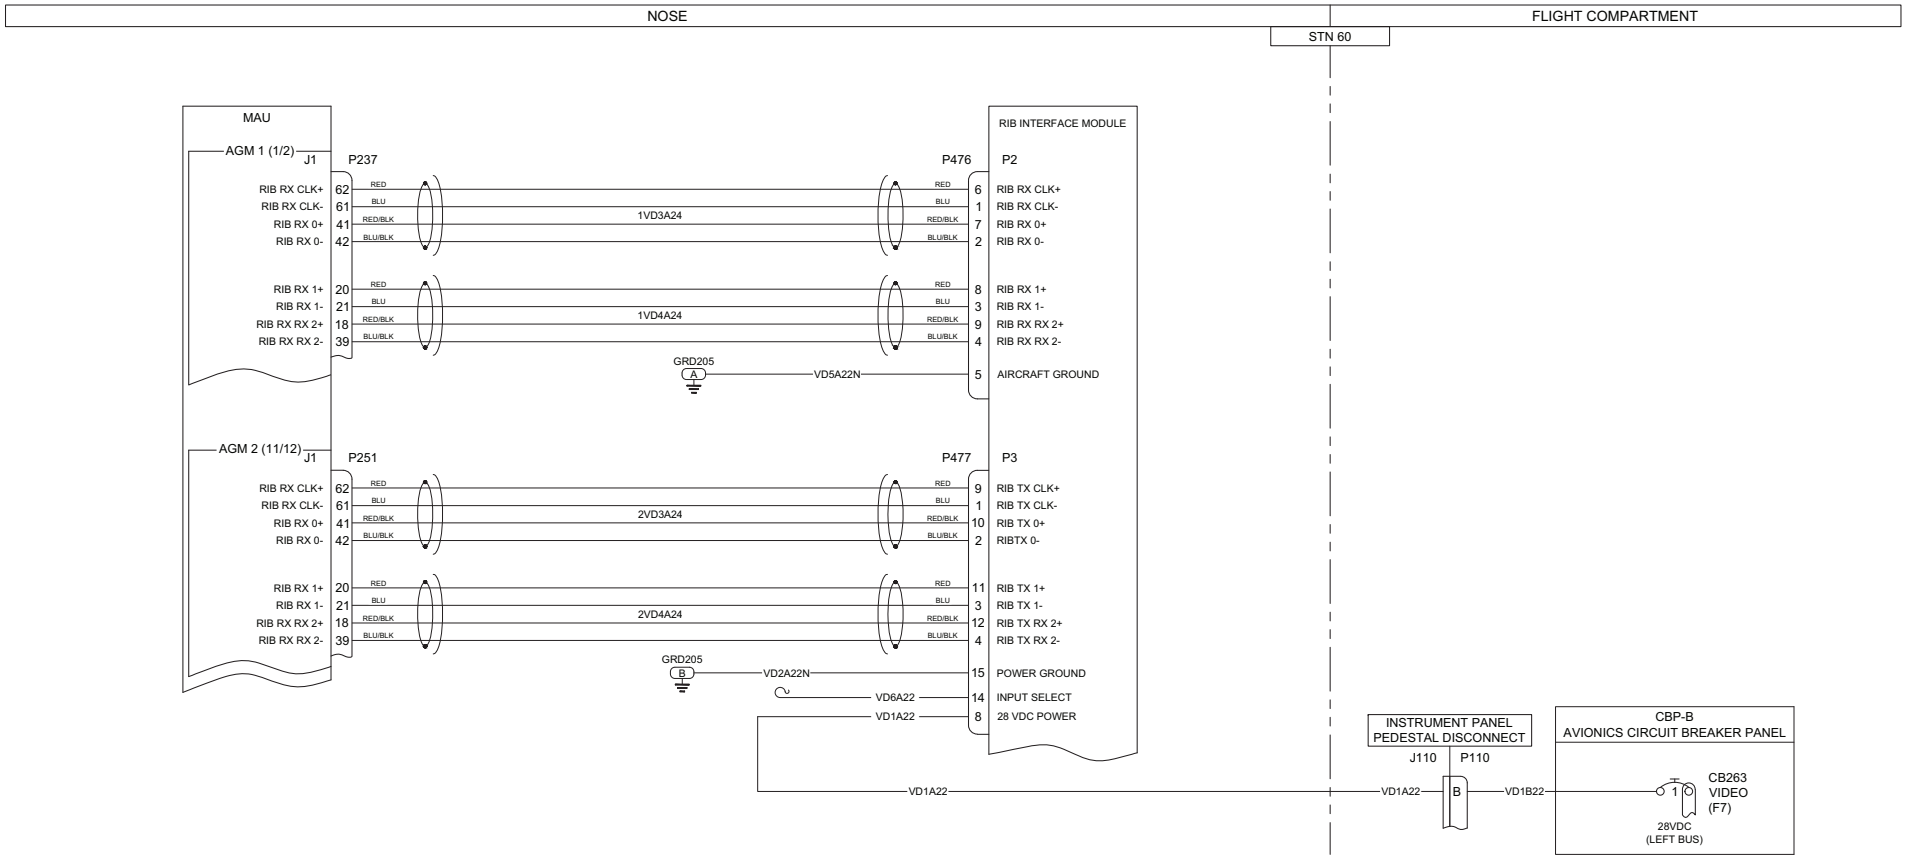

RIB VIDEO
(S.O.O. 6212)

SHEET 1 OF 1

C6N1004-116 ISSUE NO. 1

This Page Intentionally Left Blank

CHAPTER 32

LANDING GEAR

This Page Intentionally Left Blank

CHAPTER 32 – LANDING GEAR

This list shows the effective pages in the manual, with their latest revision date. An asterisk (*) indicates pages added or replaced at the latest revision. Technical changes to the content are indicated by a black vertical line next to the change or the paragraph that contains the change.

REFERENCE	PAGE	DATE	REFERENCE	PAGE	DATE
32	* 1	Sep. 30/14		* 5	Sep. 30/14
	* 2	Blank Page		* 6	Blank Page
	* 3	Sep. 30/14	32-61-00	* 1	Sep. 30/14
	* 4	Blank Page		* 2	Blank Page


This Page Intentionally Left Blank

CHAPTER 32 – LANDING GEAR

TABLE OF CONTENTS

SUBJECT	CHAPTER SECTION SUBJECT
POSITION AND WARNING	**32-60**
– WHEEL-SKI INDICATION	**32-61**
Ski Position Indication (S.O.O. 6001, Post Mod 6/2182)	32-61-00

This Page Intentionally Left Blank

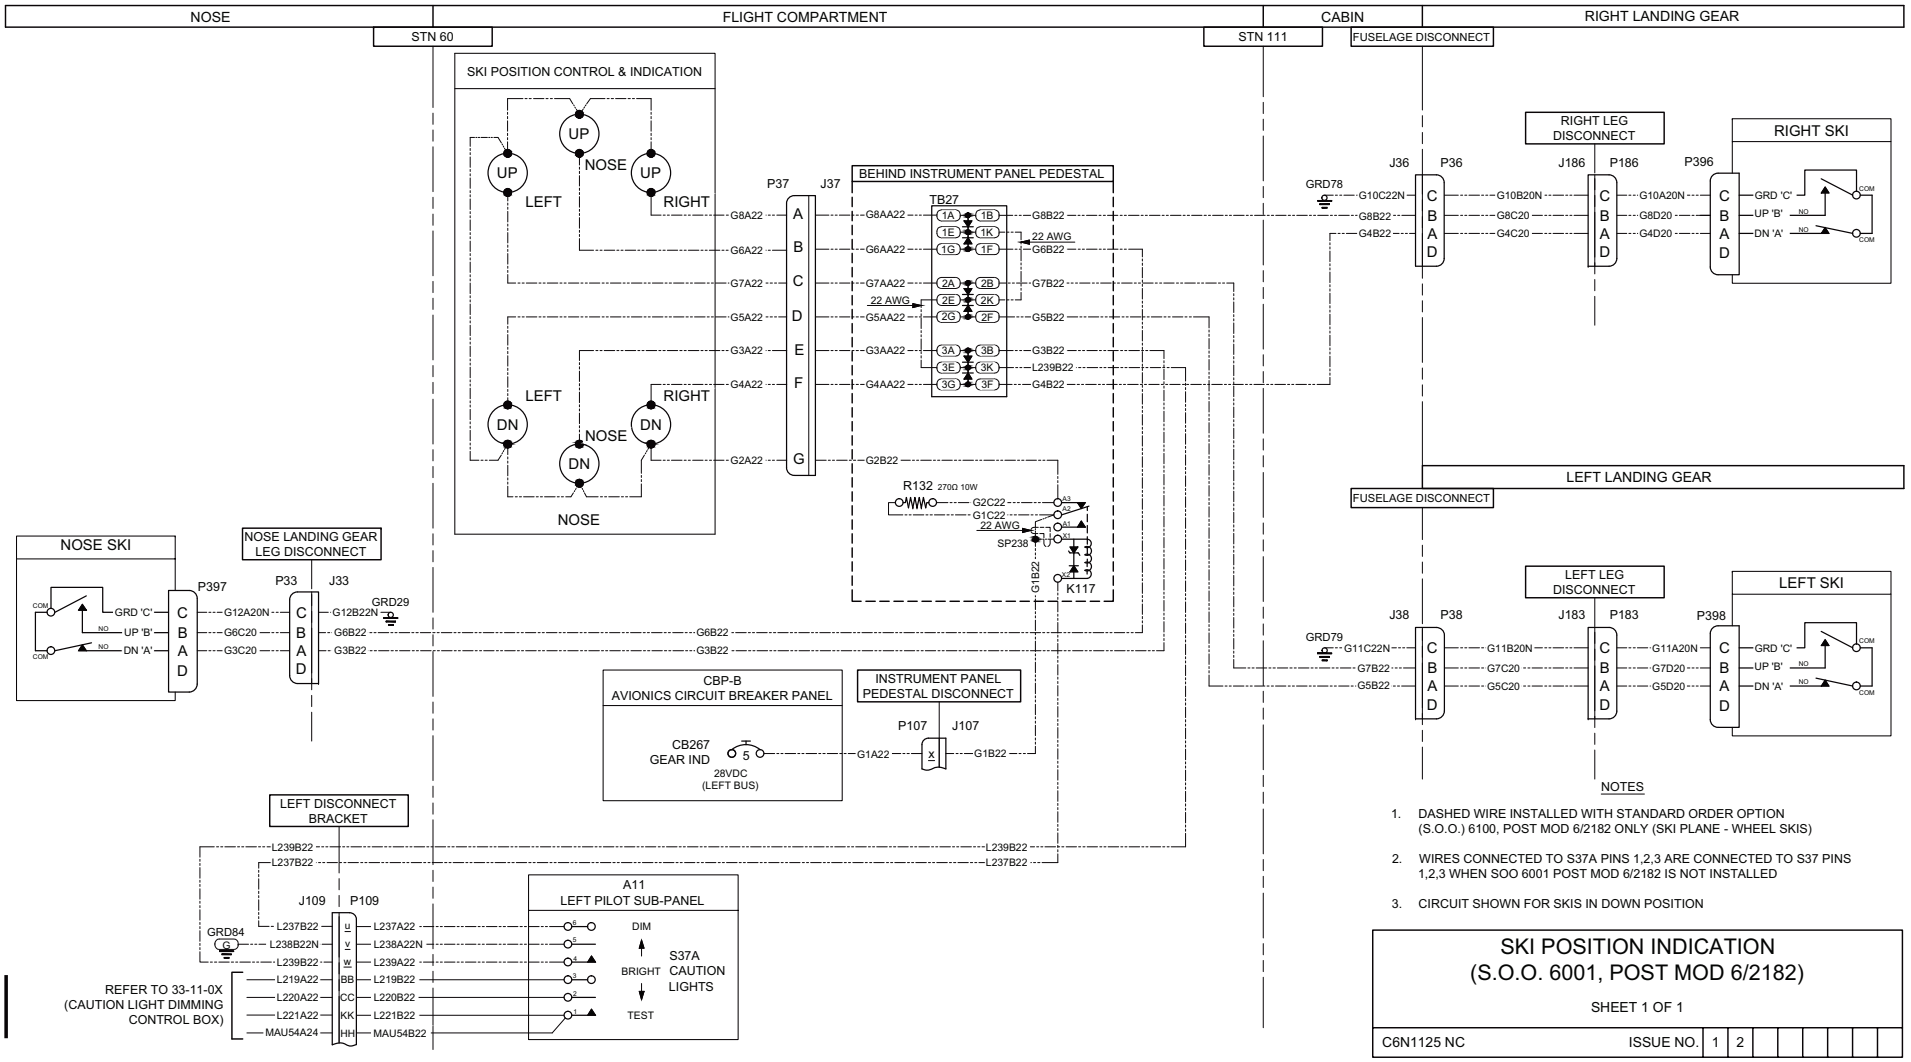

NOTES

1. DASHED WIRE INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6100, POST MOD 6/2182 ONLY (SKI PLANE - WHEEL SKIS)
2. WIRES CONNECTED TO S37A PINS 1,2,3 ARE CONNECTED TO S37 PINS 1,2,3 WHEN SOO 6001 POST MOD 6/2182 IS NOT INSTALLED
3. CIRCUIT SHOWN FOR SKIS IN DOWN POSITION

SKI POSITION INDICATION (S.O.O. 6001, POST MOD 6/2182)

SHEET 1 OF 1

C6N1125 NC	ISSUE NO.	1	2						

This Page Intentionally Left Blank

CHAPTER 33

LIGHTS

This Page Intentionally Left Blank

CHAPTER 33 – LIGHTS

This list shows the effective pages in the manual, with their latest revision date. An asterisk (*) indicates pages added or replaced at the latest revision. Technical changes to the content are indicated by a black vertical line next to the change or the paragraph that contains the change.

REFERENCE	PAGE	DATE	REFERENCE	PAGE	DATE
33	1	Sep. 30/14		* 2	Blank Page
	2	Blank Page	33-30-01	* 1	Nov. 30/18
	* 3	Nov. 30/18		* 2	Blank Page
	* 4	Blank Page	33-41-00	* 1	Nov. 30/18
	* 5	Nov. 30/18		* 2	Nov. 30/18
	* 6	Blank Page		* 3	Nov. 30/18
33-10-00	1	Sep. 30/14		* 4	Blank Page
	2	Blank Page	33-42-00	1	Sep. 30/14
33-10-10	1	Sep. 30/14		2	Blank Page
	2	Blank Page	33-43-00	1	Sep. 30/14
33-11-00	1	Sep. 30/14		2	Blank Page
	2	Blank Page	33-44-00	1	Sep. 30/14
33-20-00	* 1	Nov. 30/18		2	Blank Page
	* 2	Nov. 30/18	33-45-00	* 1	Nov. 30/18
	* 3	Nov. 30/18		* 2	Nov. 30/18
	* 4	Blank Page		* 3	Nov. 30/18
33-30-00	* 1	Nov. 30/18		* 4	Blank Page


This Page Intentionally Left Blank

CHAPTER 33 – LIGHTS

TABLE OF CONTENTS


SUBJECT	CHAPTER SECTION SUBJECT
FLIGHT COMPARTMENT	**33-10**
Flight Compartment Lights	33-10-00
Instrument Panel Lights	33-10-10
– CAUTION LIGHTS	**33-11**
Caution Light Dimming Control Box	33-11-00
PASSENGER COMPARTMENT	**33-20**
Passenger Compartment Lights (Includes S.O.O. 6205)	33-20-00
CARGO AND SERVICE COMPARTMENTS	**33-30**
Cargo and Service Compartment Lights (without S.O.O. 6393)	33-30-00
Cargo and Service Compartment Lights (with S.O.O. 6393)	33-30-01
EXTERIOR	**33-40**
– LANDING	**33-41**
Landing Lights	33-41-00
– WING INSPECTION	**33-42**
Wing Inspection Lights	33-42-00
– TAXI	**33-43**
Taxi Lights	33-43-00
– BEACON	**33-44**
Beacon Lights	33-44-00
– POSITION AND STROBE	**33-45**
Wing and Tail Position and Strobe Lights	33-45-00

This Page Intentionally Left Blank

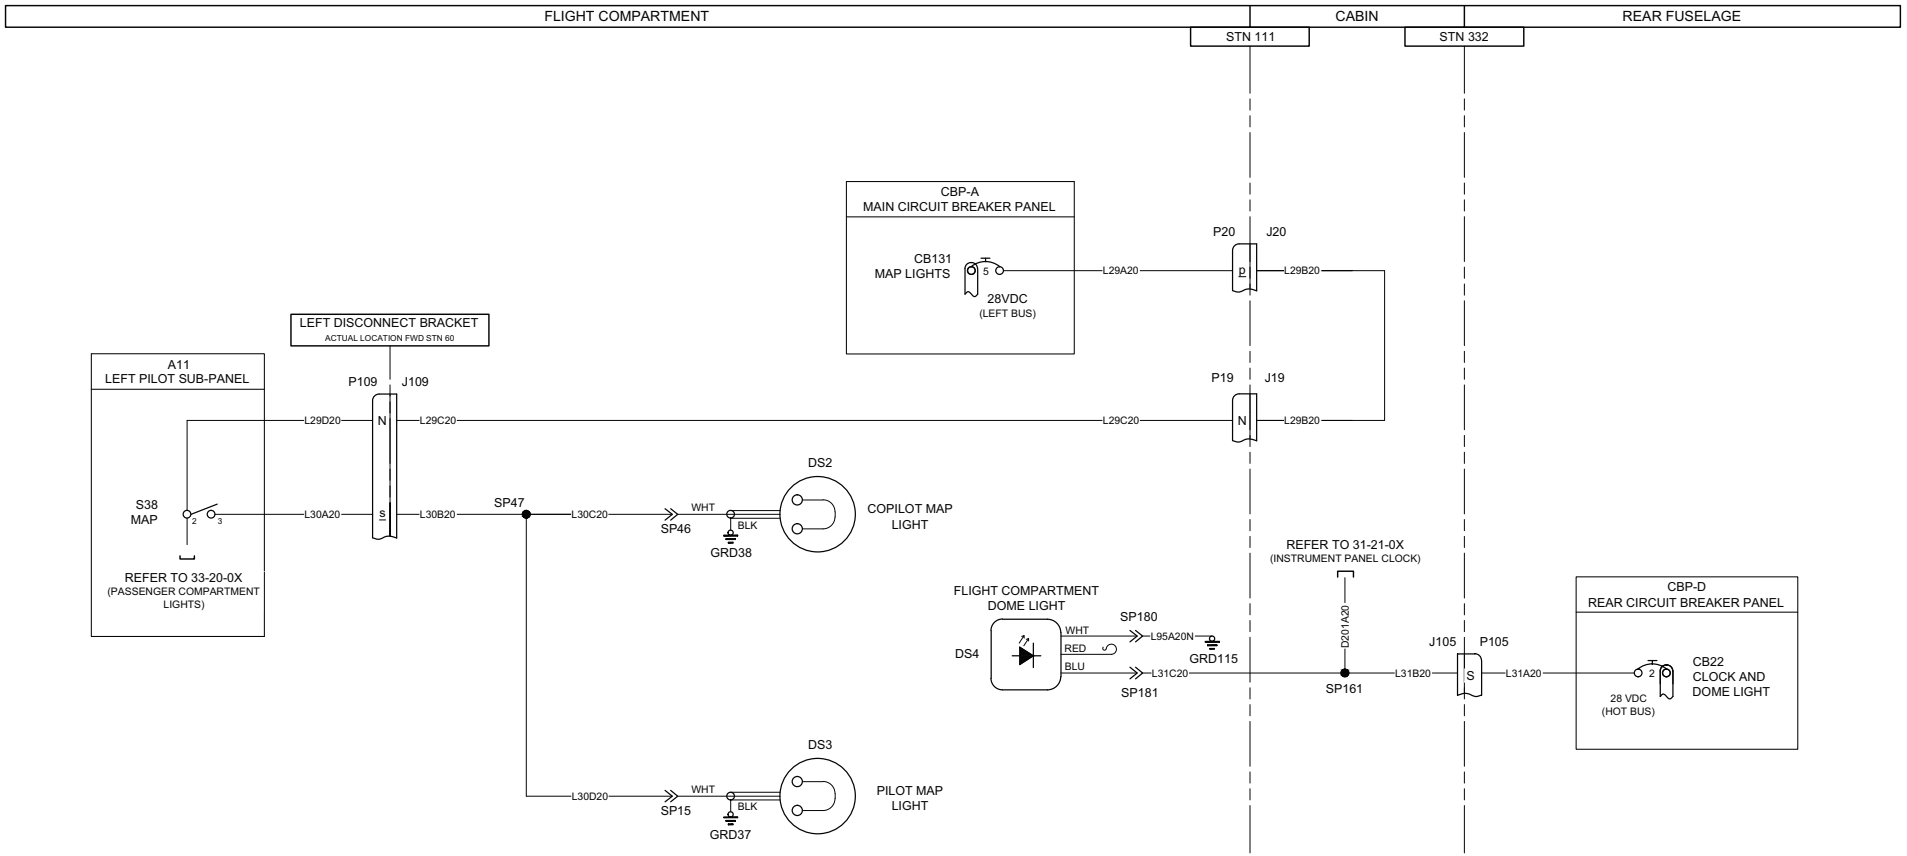

FLIGHT COMPARTMENT LIGHTS										
SHEET 1 OF 1										
C6N1004-18	ISSUE NO.	1								

This Page Intentionally Left Blank

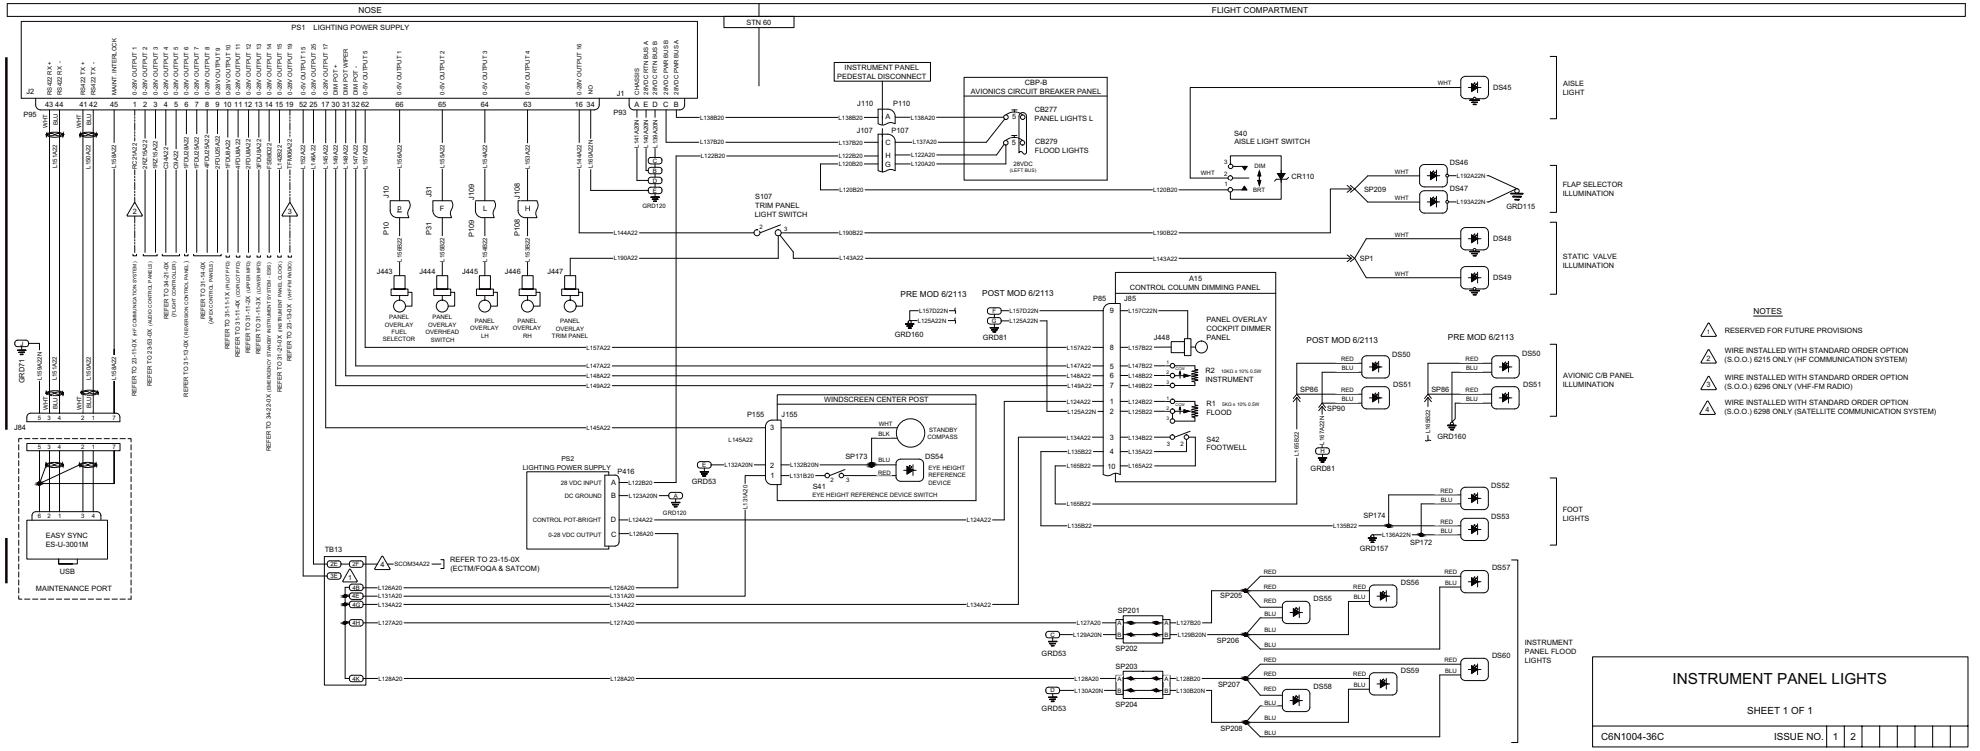

NOTES


1. RESERVED FOR FUTURE PROVISIONS
2. WIRE INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6215 ONLY (HF COMMUNICATION SYSTEM)
3. WIRE INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6296 ONLY (VHF-FM RADIO)
4. WIRE INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6298 ONLY (SATELLITE COMMUNICATION SYSTEM)

INSTRUMENT PANEL LIGHTS

SHEET 1 OF 1

C6N1004-36C ISSUE NO. 1 2

This Page Intentionally Left Blank

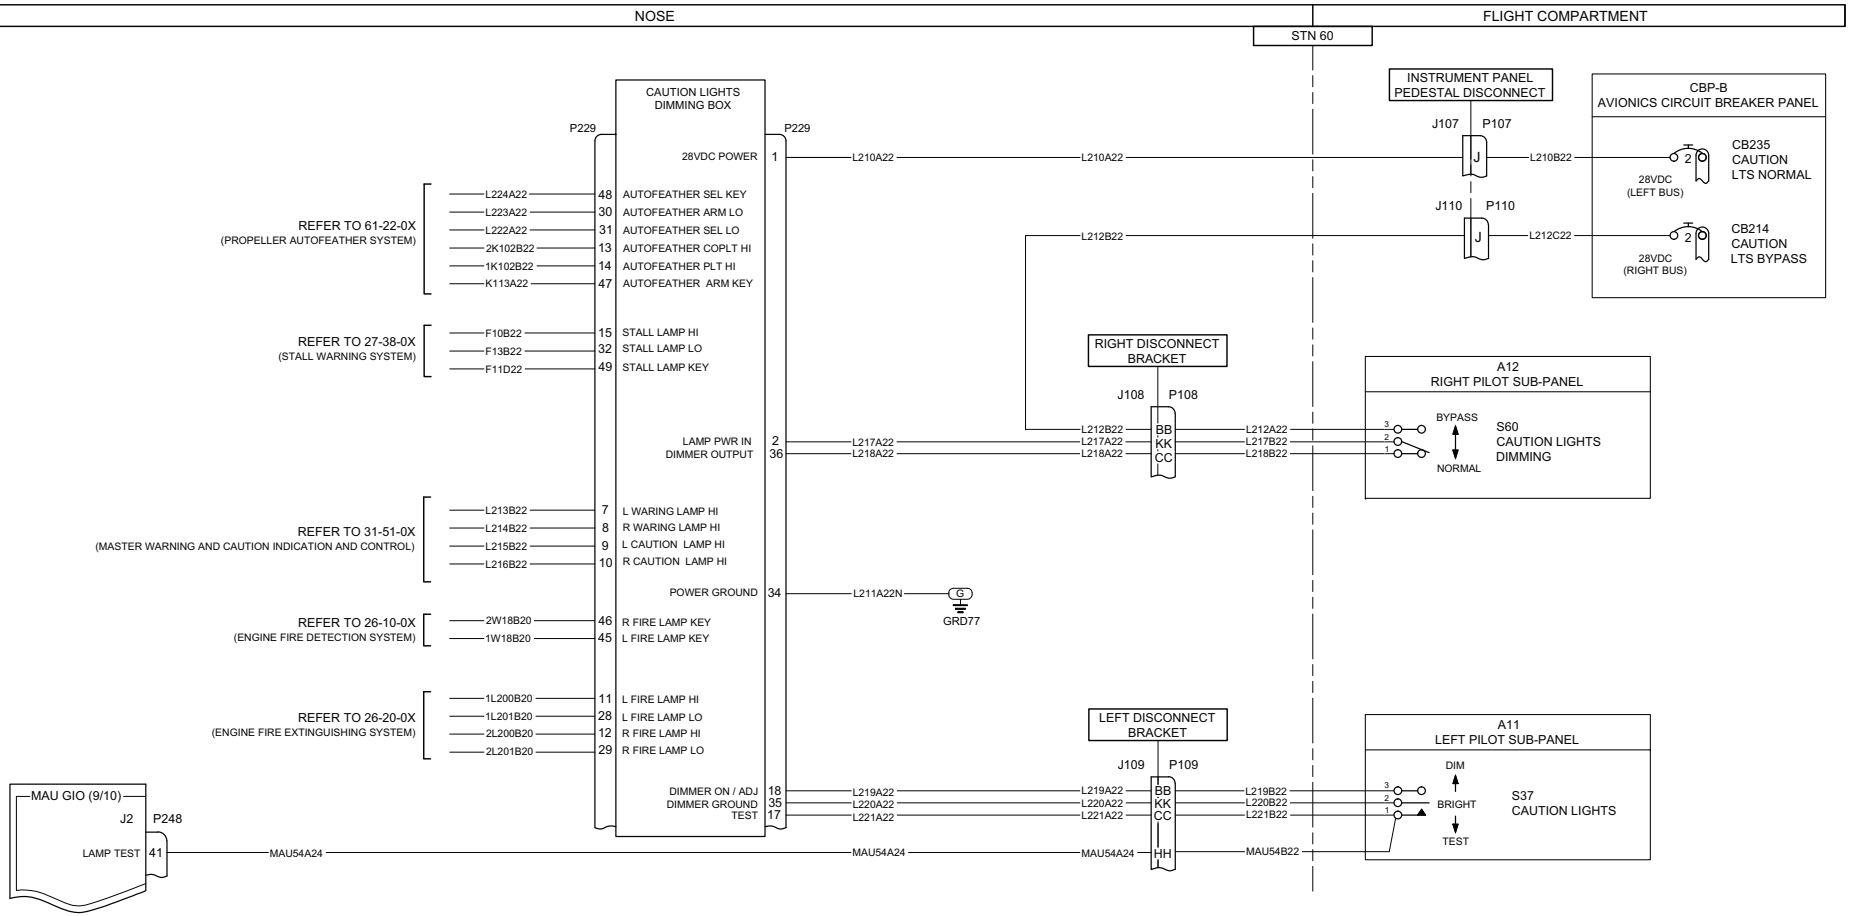


CAUTION LIGHT DIMMING CONTROL BOX

SHEET 1 OF 1

C6N1004-70 ISSUE NO. 1

This Page Intentionally Left Blank

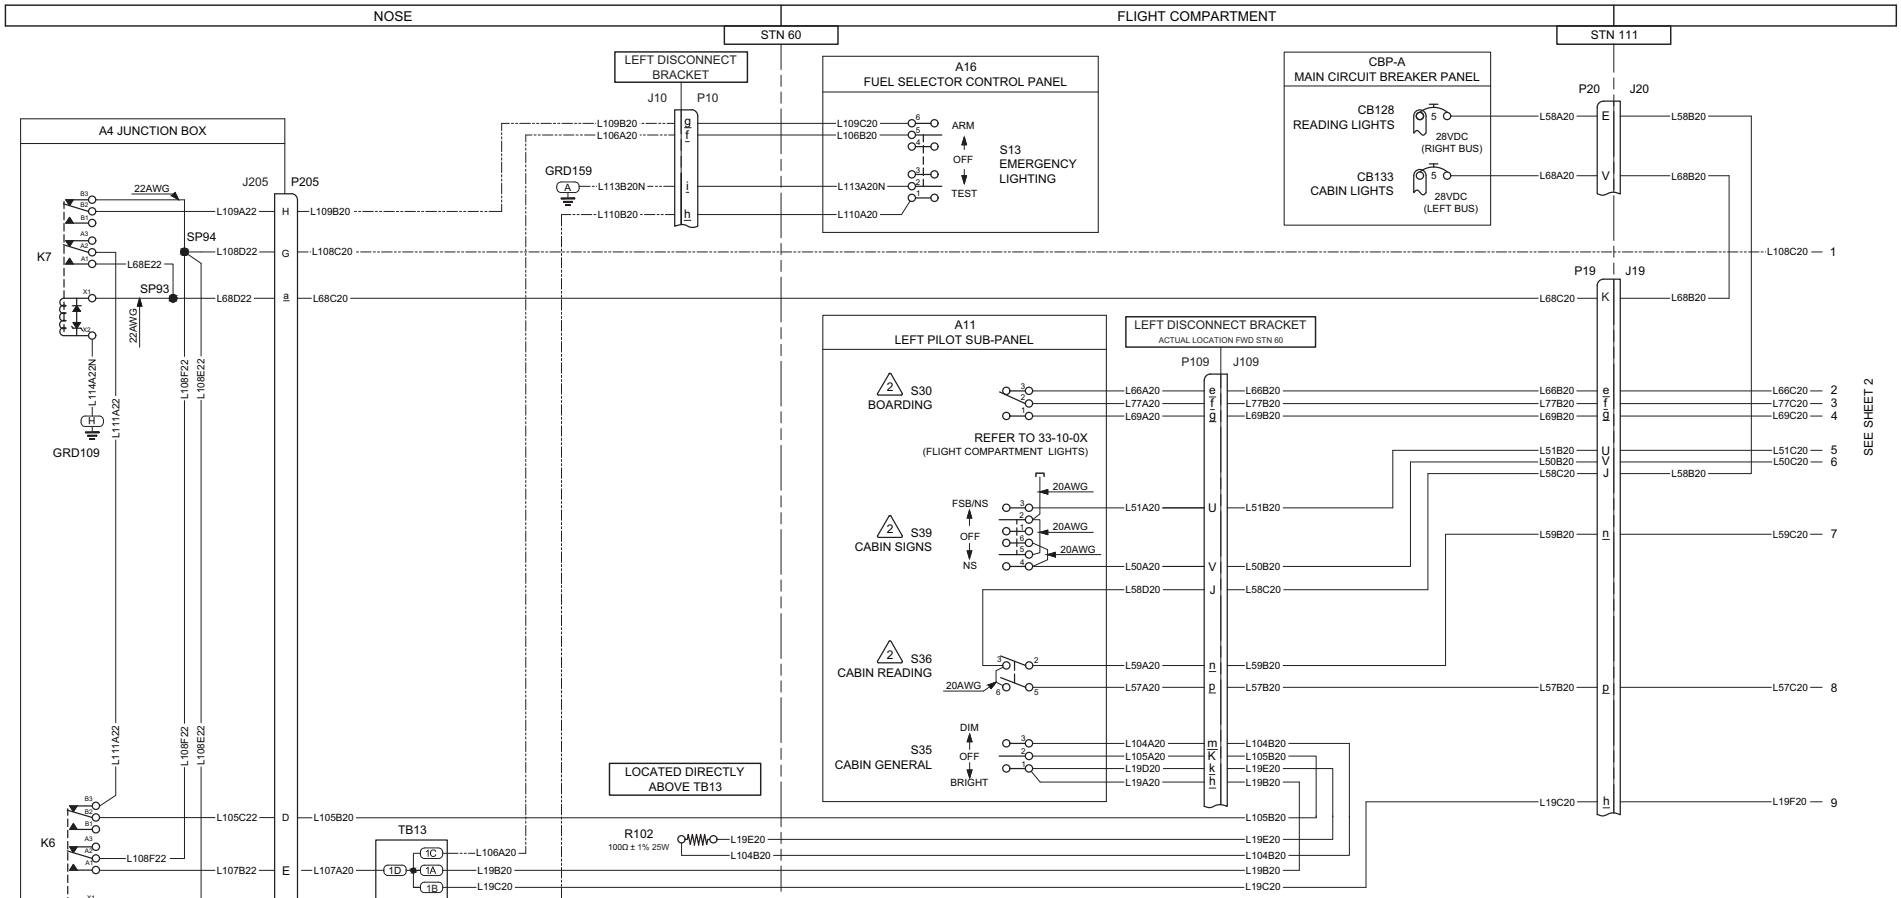

NOTES

1. DASHED WIRE INSTALLED WITH (S.O.O.) 6205 ONLY (CABIN EMERGENCY LIGHTING SYSTEM)


2 WHEN S.O.O. 6311 (PROVISIONS FOR CUSTOM CABIN INTERIOR) IS INCORPORATED:
- SWITCHES S30, S36, & S39 SHALL BE MARKED 'INOP'
- CIRCUIT BREAKER CB128 SHALL BE OPENED, COLLARED, AND MARKED 'INOP'
- WIRES L59C20 AND L58D20N SHALL BE CAPPED & STOWED NEAR STN 125 AT LEFT READING LIGHT FWD LOCATION
- WIRES L57C20 AND L57D20N SHALL BE CAPPED & STOWED NEAR STN 125 AT RIGHT READING LIGHT FWD LOCATION
- WIRES L50C20 AND L51C20 SHALL BE CAPPED & STOWED NEAR STN 111 RIGHT SIDE AT CABIN SIGN LOCATION
- WIRES L66C20, L69C20, AND L33E20 SHALL BE CAPPED & STOWED NEAR STN 271 LH SIDE AT BOARDING LIGHT SWITCH LOCATION
- WIRE L77C20 SHALL BE CAPPED & STOWED NEAR STN 288 LH SIDE AT BOARDING LIGHT LOCATION

PASSENGER COMPARTMENT LIGHTS (INCLUDES S.O.O. 6205)

SHEET 1 OF 2

C6N1004-19 ISSUE NO. 1 2 3

This Page Intentionally Left Blank

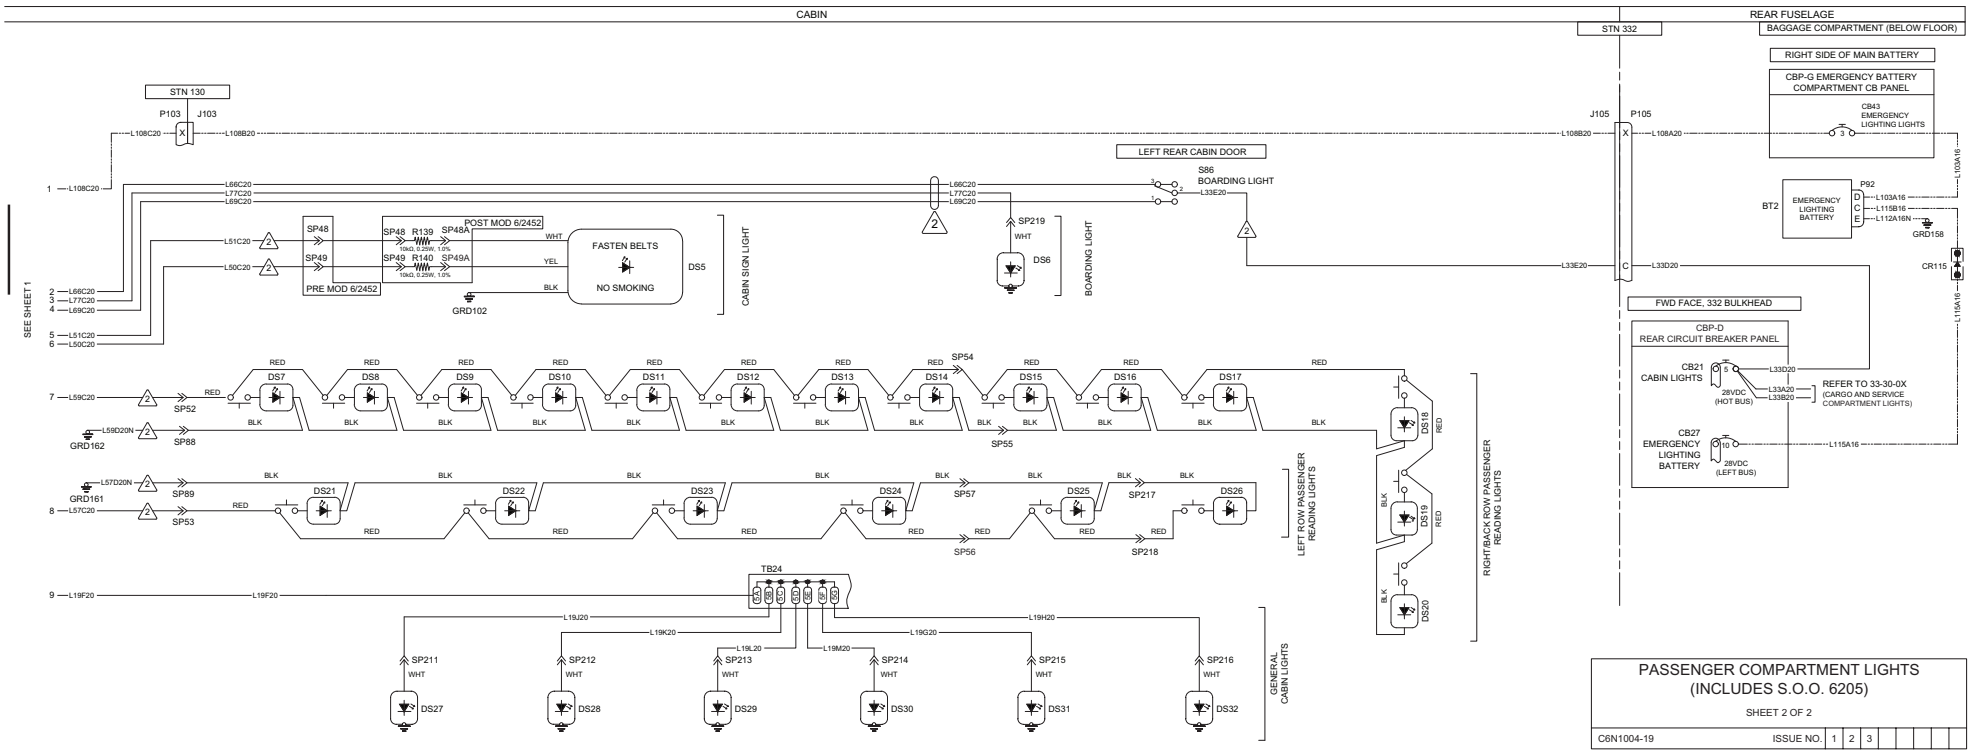


PASSENGER COMPARTMENT LIGHTS
(INCLUDES S.O.O. 6205)

SHEET 2 OF 2

C6N1004-19 ISSUE NO. 1 2 3

This Page Intentionally Left Blank

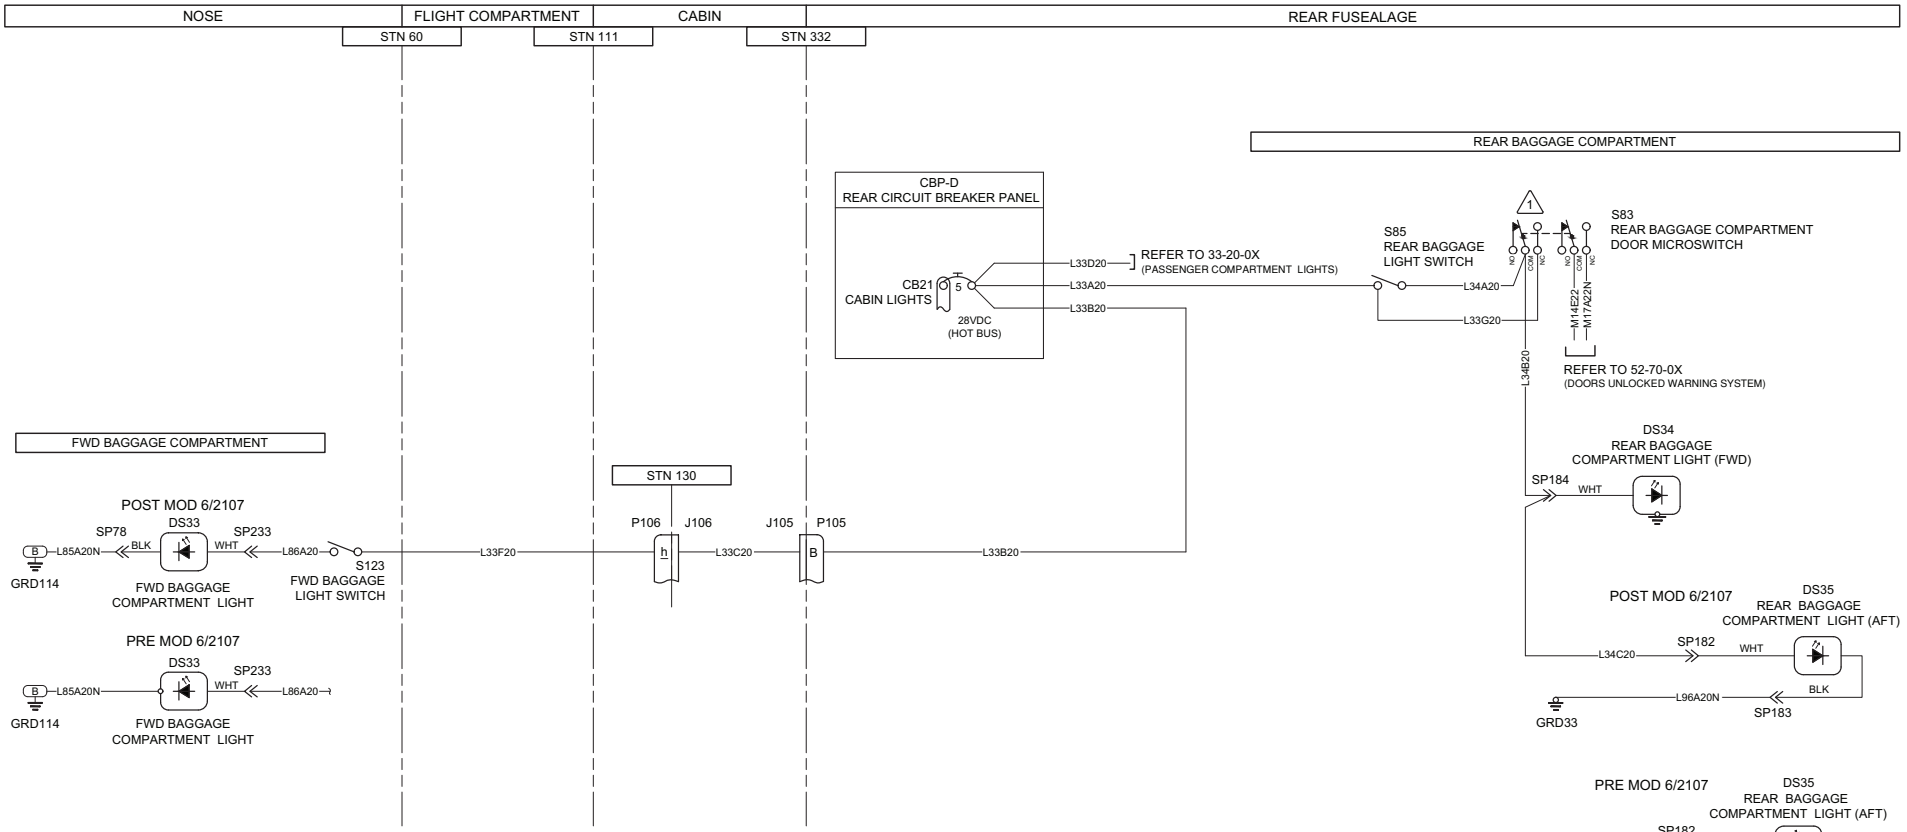

NOTES


1. SWITCH SHOWN ACTUATED (DOOR CLOSED)

CARGO AND SERVICE COMPARTMENT LIGHTS WITHOUT SOO 6393

SHEET 1 OF 1

C6N1004-20-1B ISSUE NO. 1 2 3

This Page Intentionally Left Blank

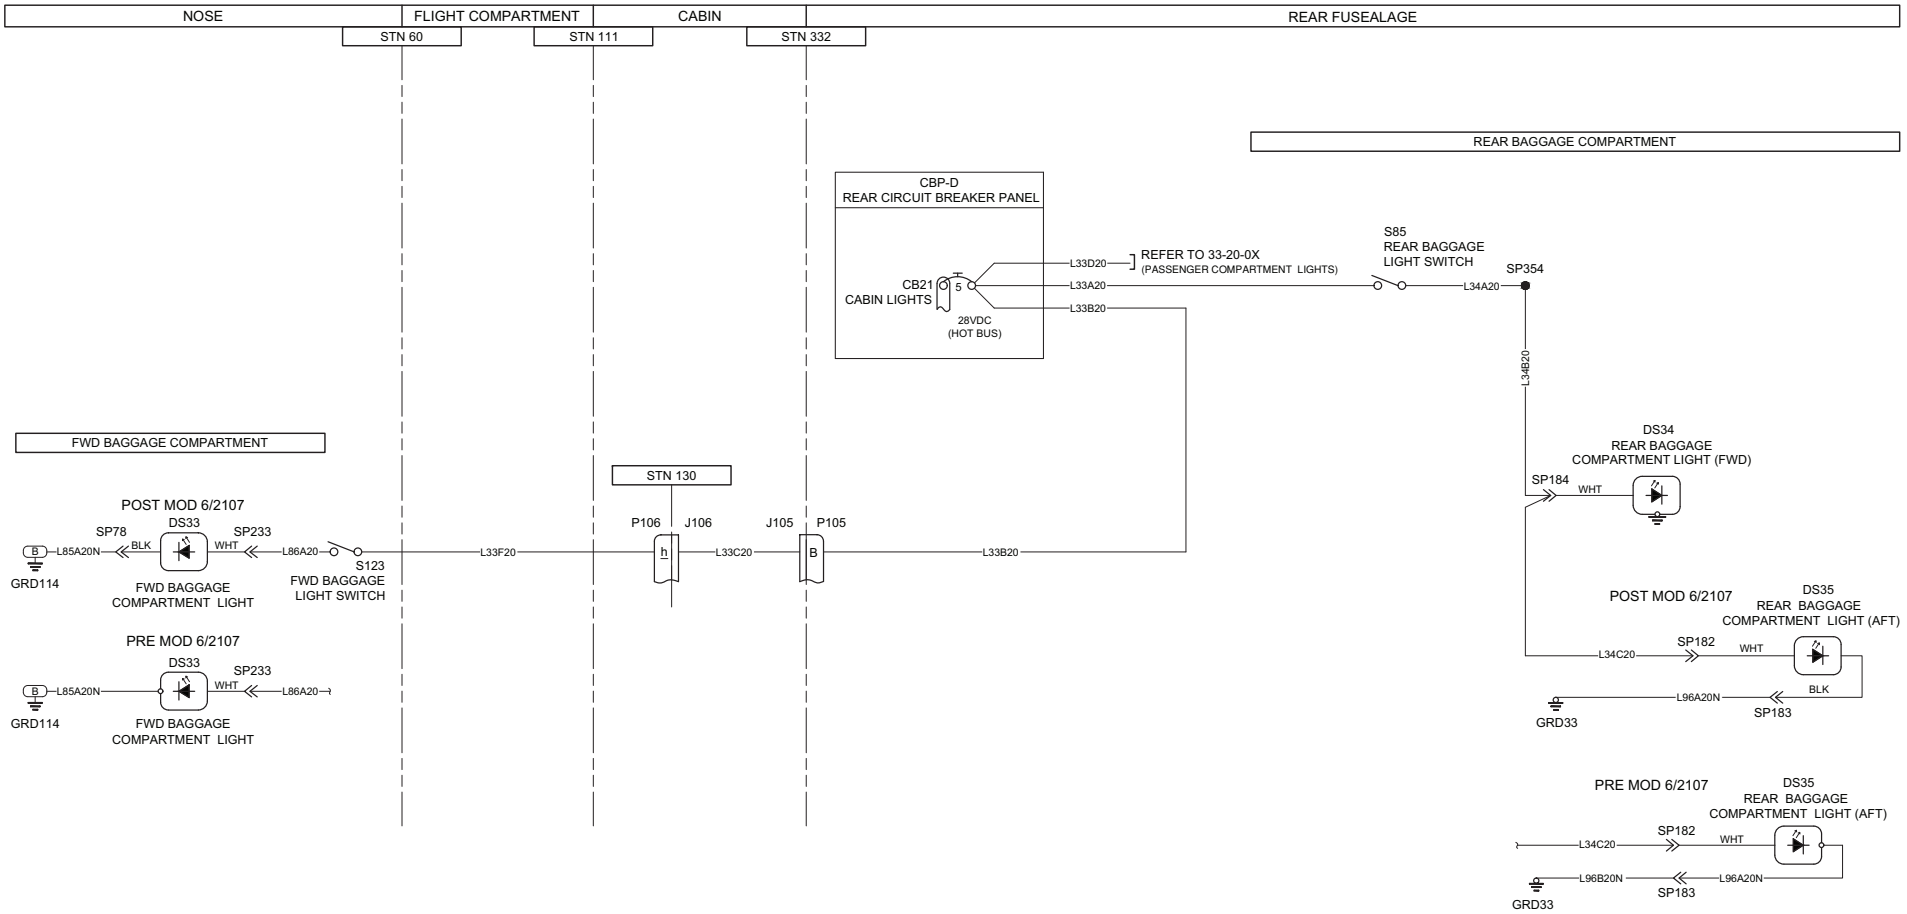


CARGO AND SERVICE COMPARTMENT
LIGHTS WITH SOO 6393

SHEET 1 OF 1

C6N1004-20-2NC	ISSUE NO.	1

This Page Intentionally Left Blank

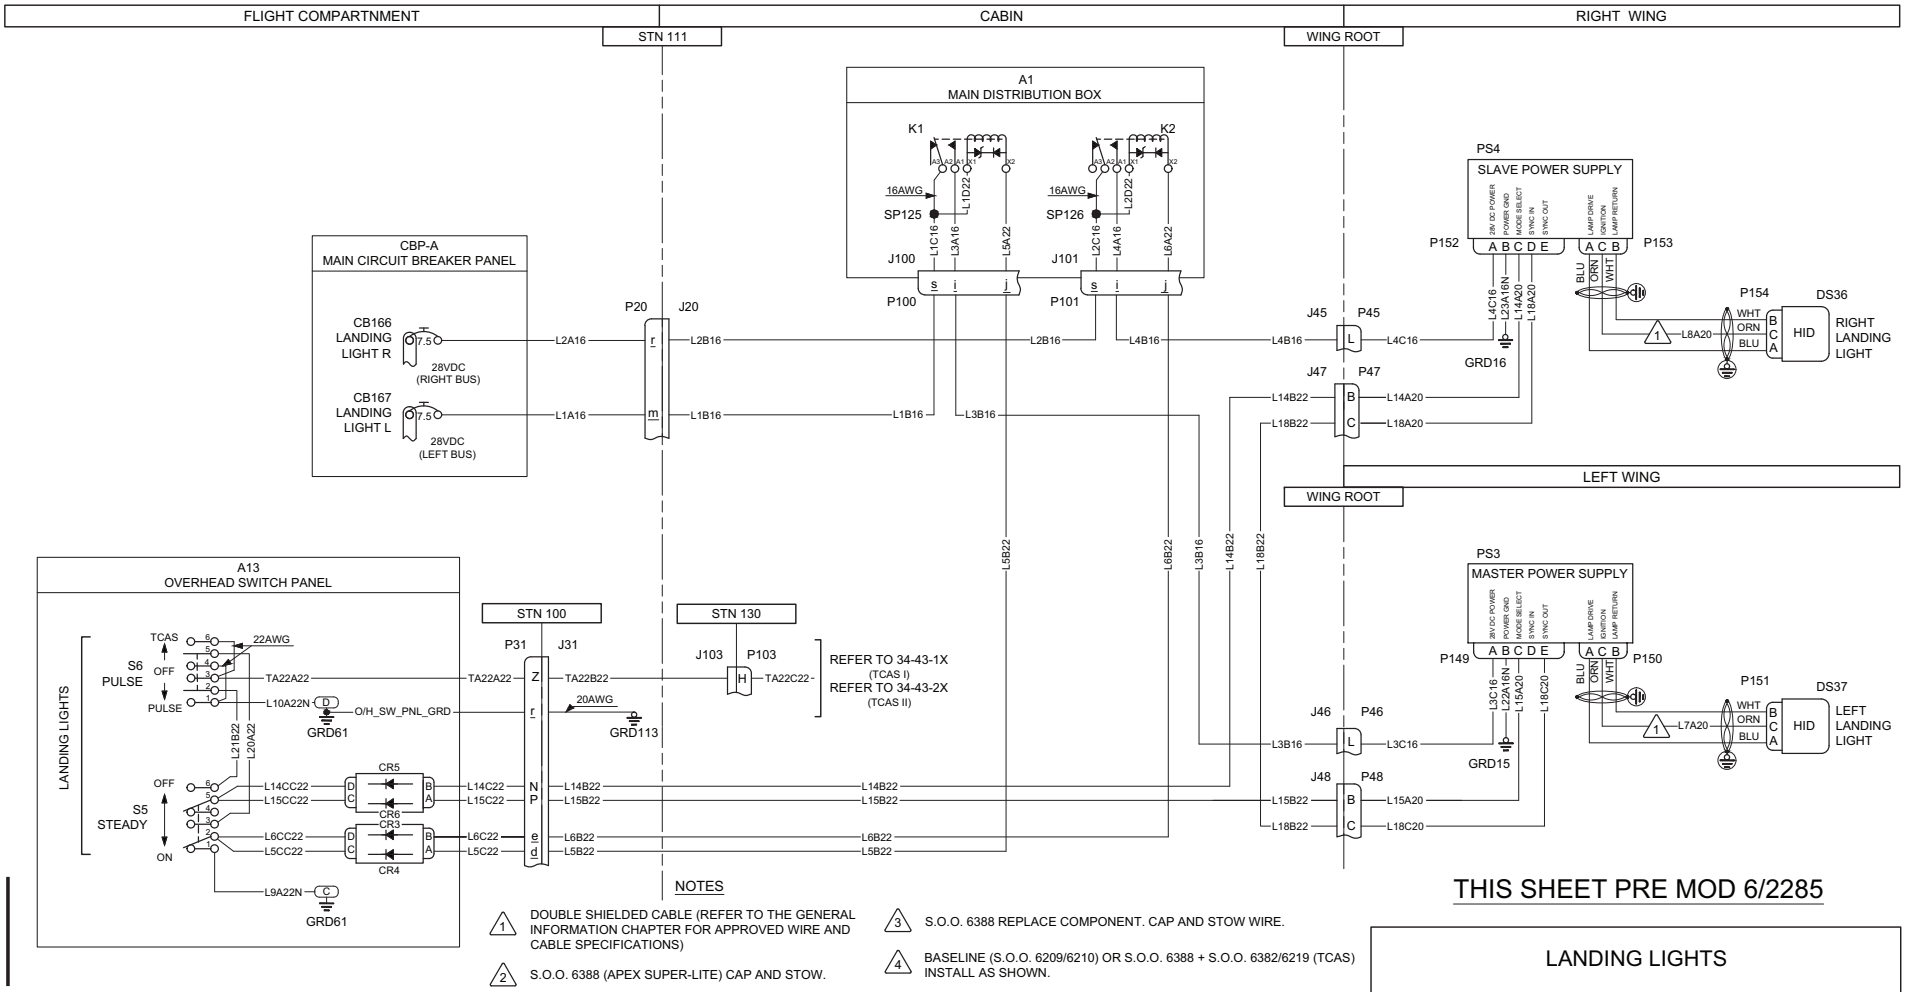

NOTES

1. DOUBLE SHIELDED CABLE (REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)
2. S.O.O. 6388 (APEX SUPER-LITE) CAP AND STOW.
3. S.O.O. 6388 REPLACE COMPONENT. CAP AND STOW WIRE.
4. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 + S.O.O. 6382/6219 (TCAS) INSTALL AS SHOWN.


THIS SHEET PRE MOD 6/2285

LANDING LIGHTS

SHEET 1 OF 2

C6N1004-21 ISSUE NO. 1 2 3


This Page Intentionally Left Blank

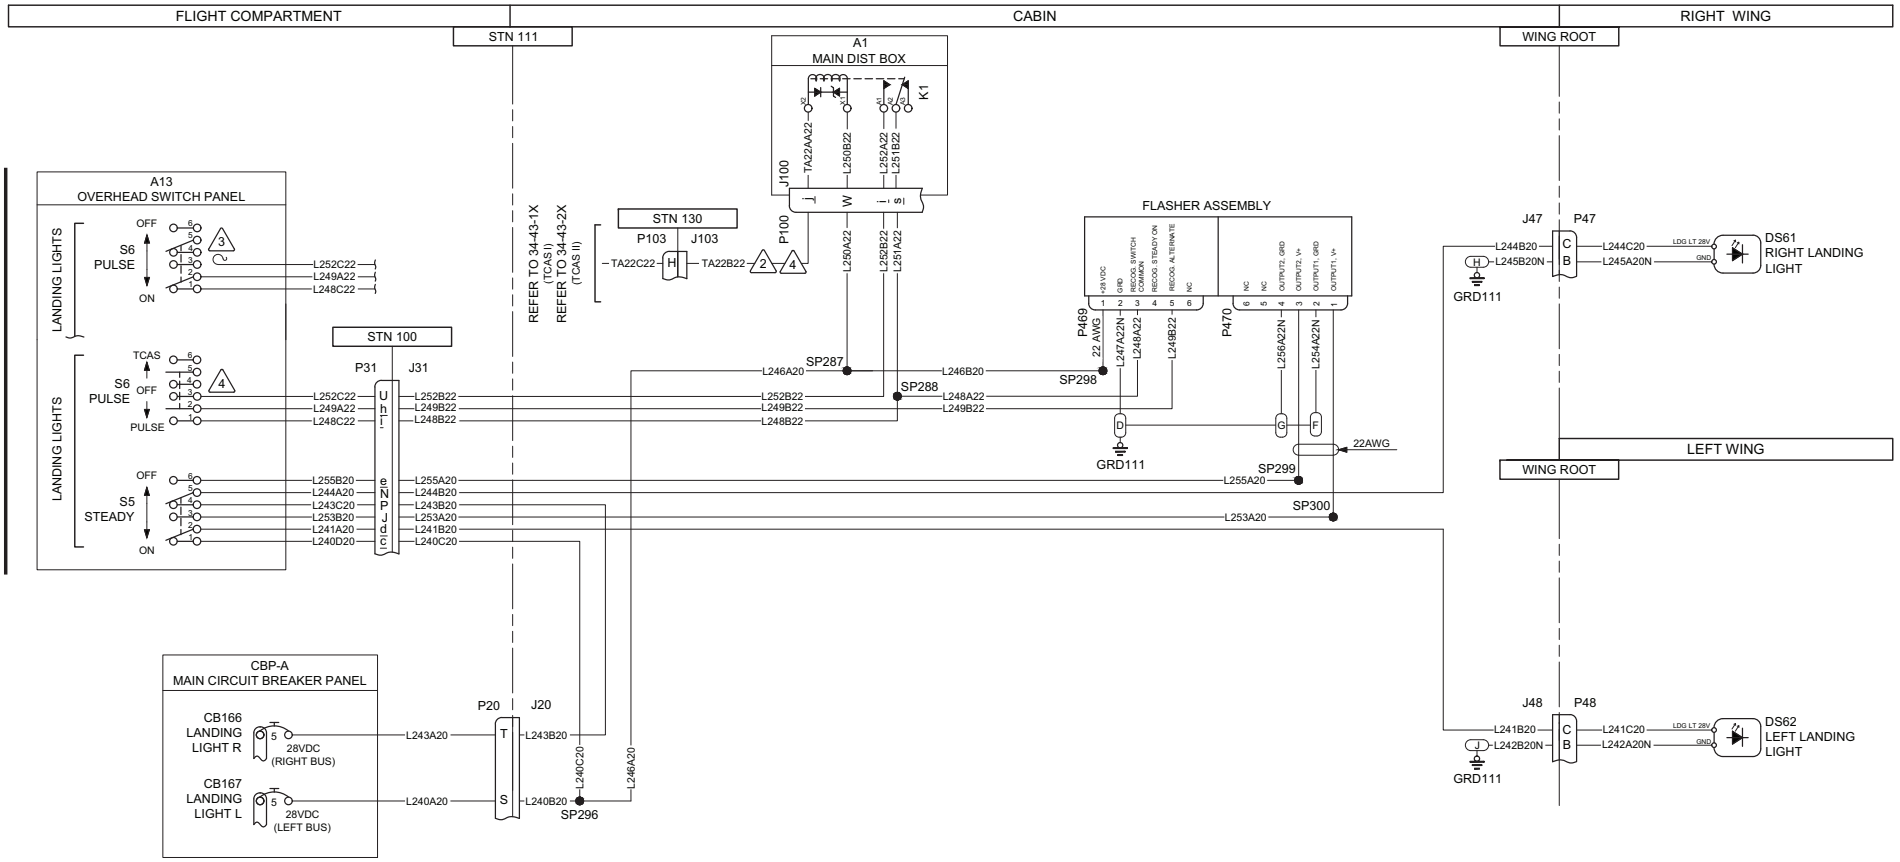

THIS SHEET POST MOD 6/2285

LANDING LIGHTS									
SHEET 2 OF 2									
C6N1004-21	ISSUE NO.	1	2	3	4				

This Page Intentionally Left Blank

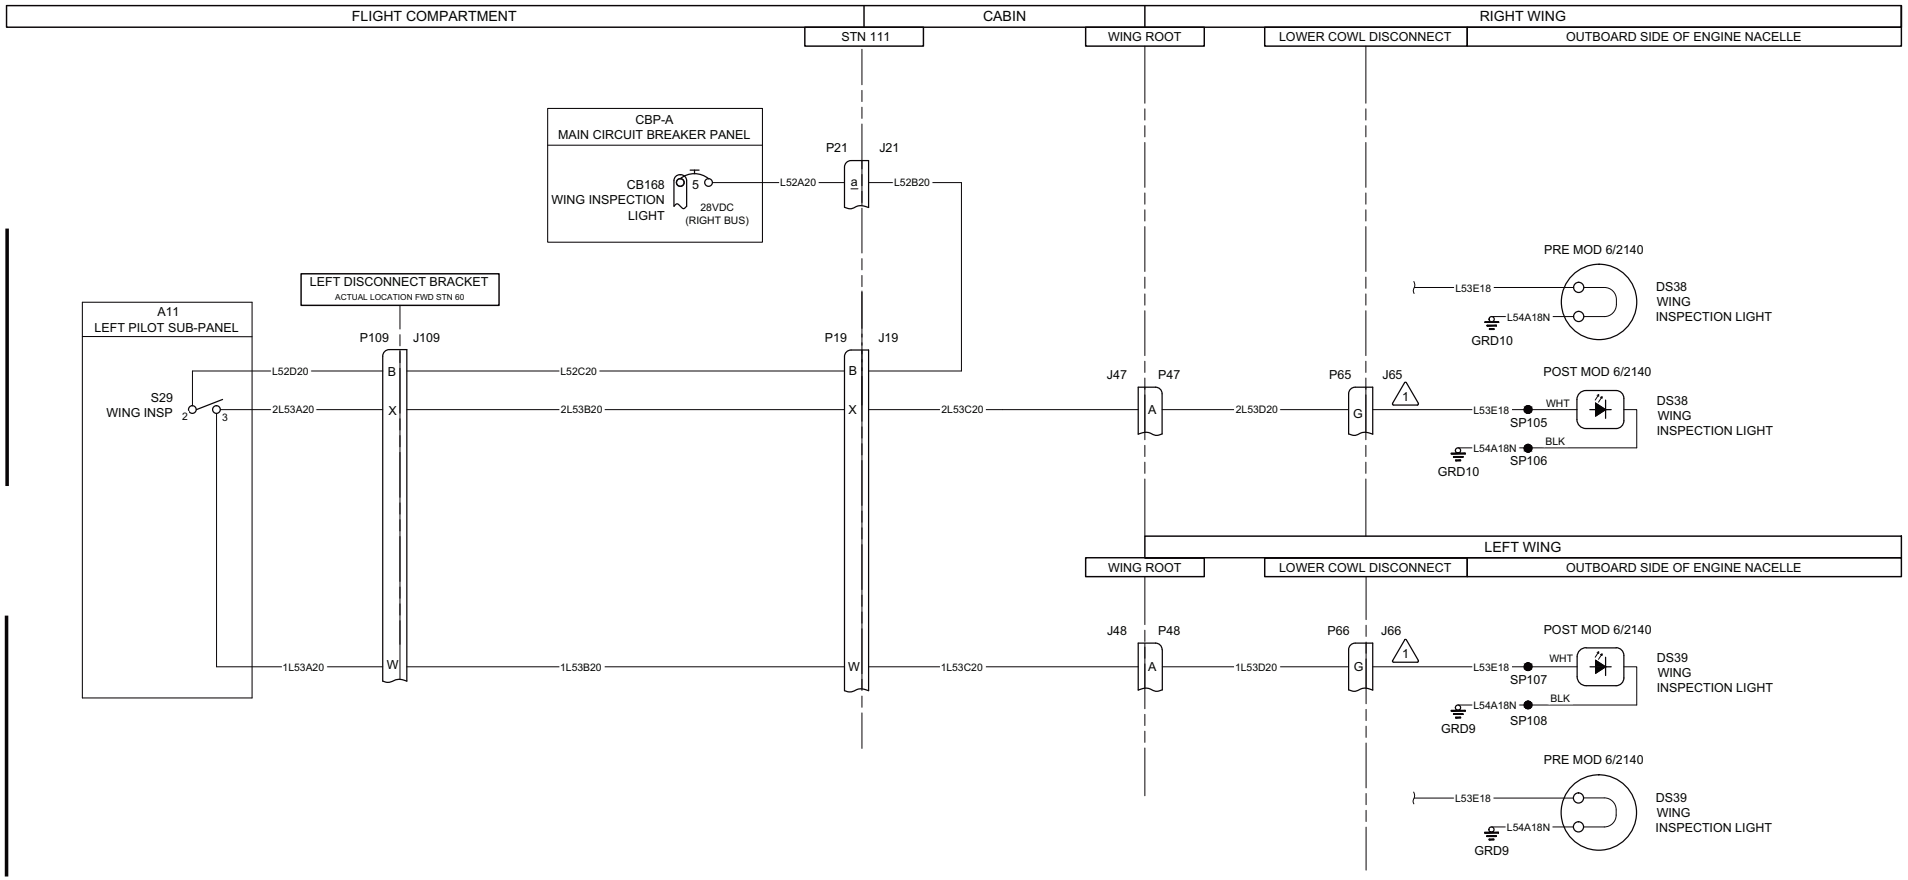

NOTES


1. HIGH TEMPERATURE RATED WIRE AND CABLE REQUIRED IN ALL AREAS FORWARD THE LOWER COWL DISCONNECT (REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)

WING INSPECTION LIGHTS

SHEET 1 OF 1

C6N1004-22A	ISSUE NO.	1	2							

This Page Intentionally Left Blank

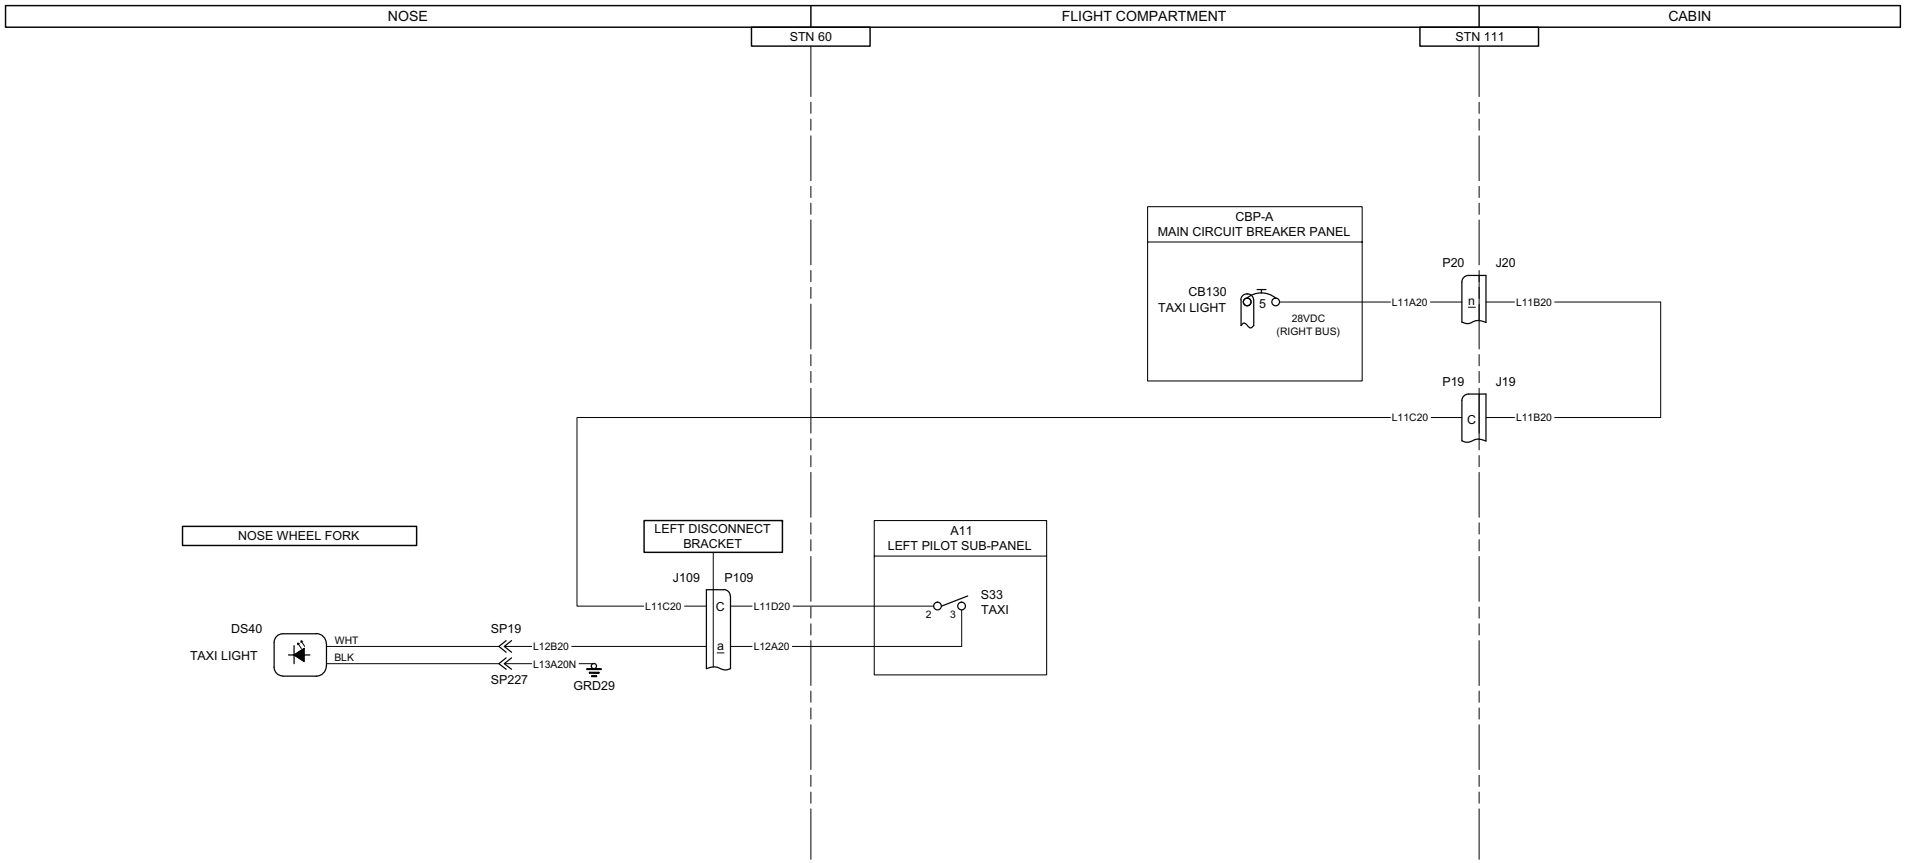


TAXI LIGHTS

SHEET 1 OF 1

C6N1004-23 ISSUE NO. 1

This Page Intentionally Left Blank

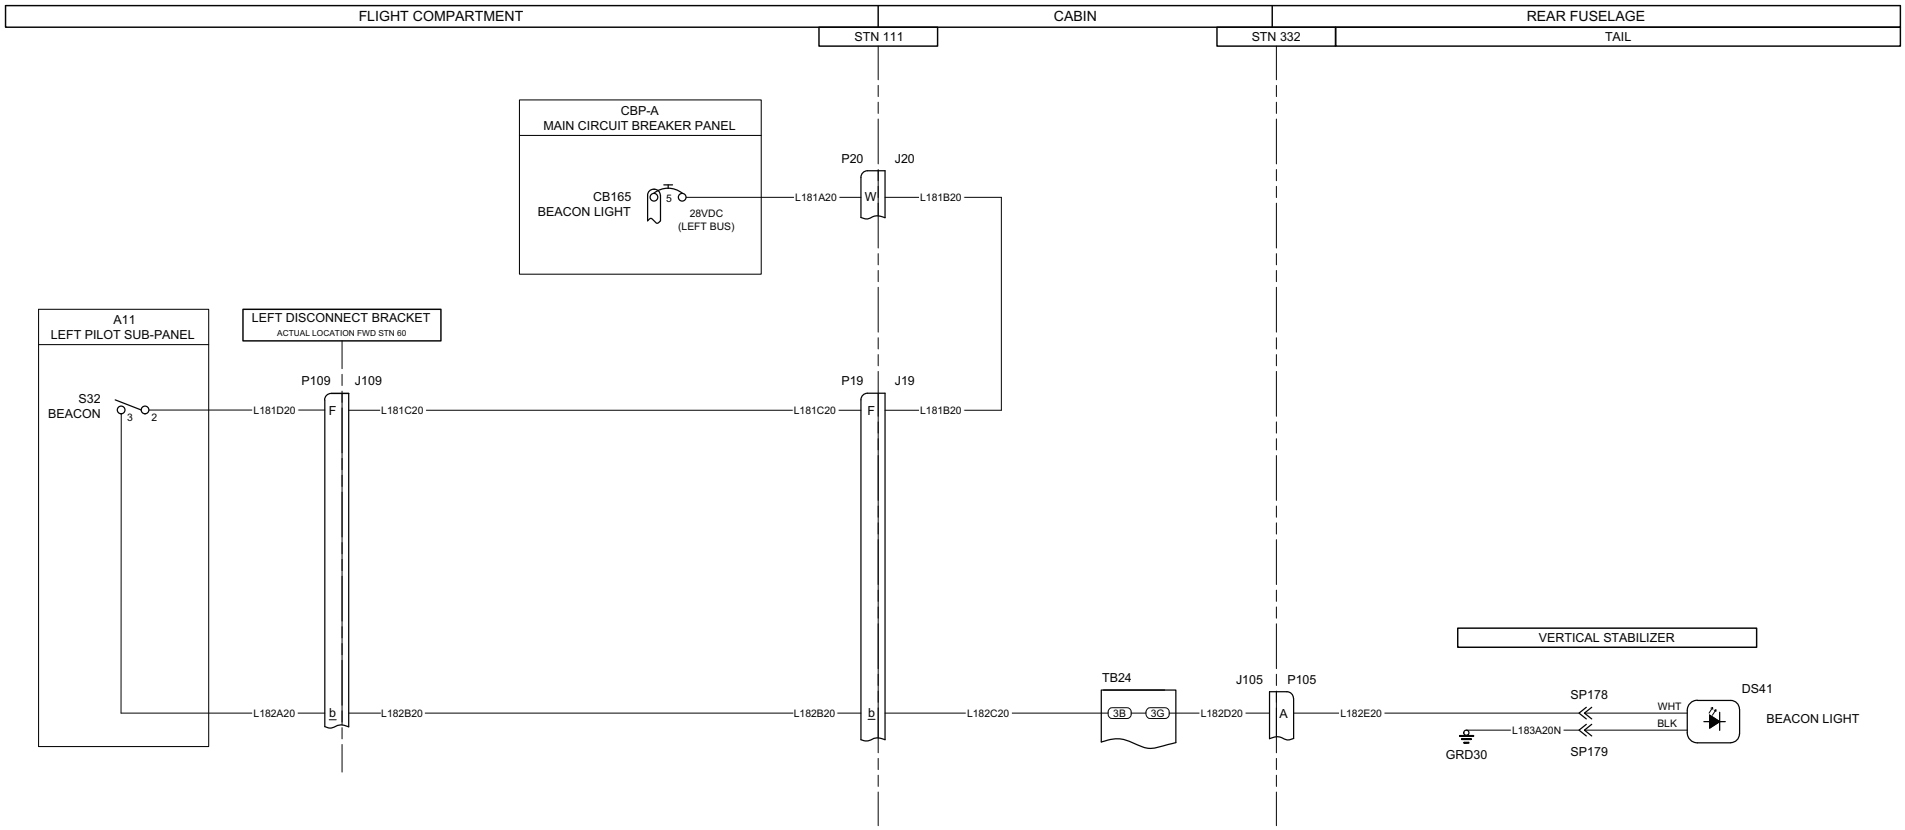


BEACON LIGHT

SHEET 1 OF 1

C6N1004-24 ISSUE NO. 1

This Page Intentionally Left Blank

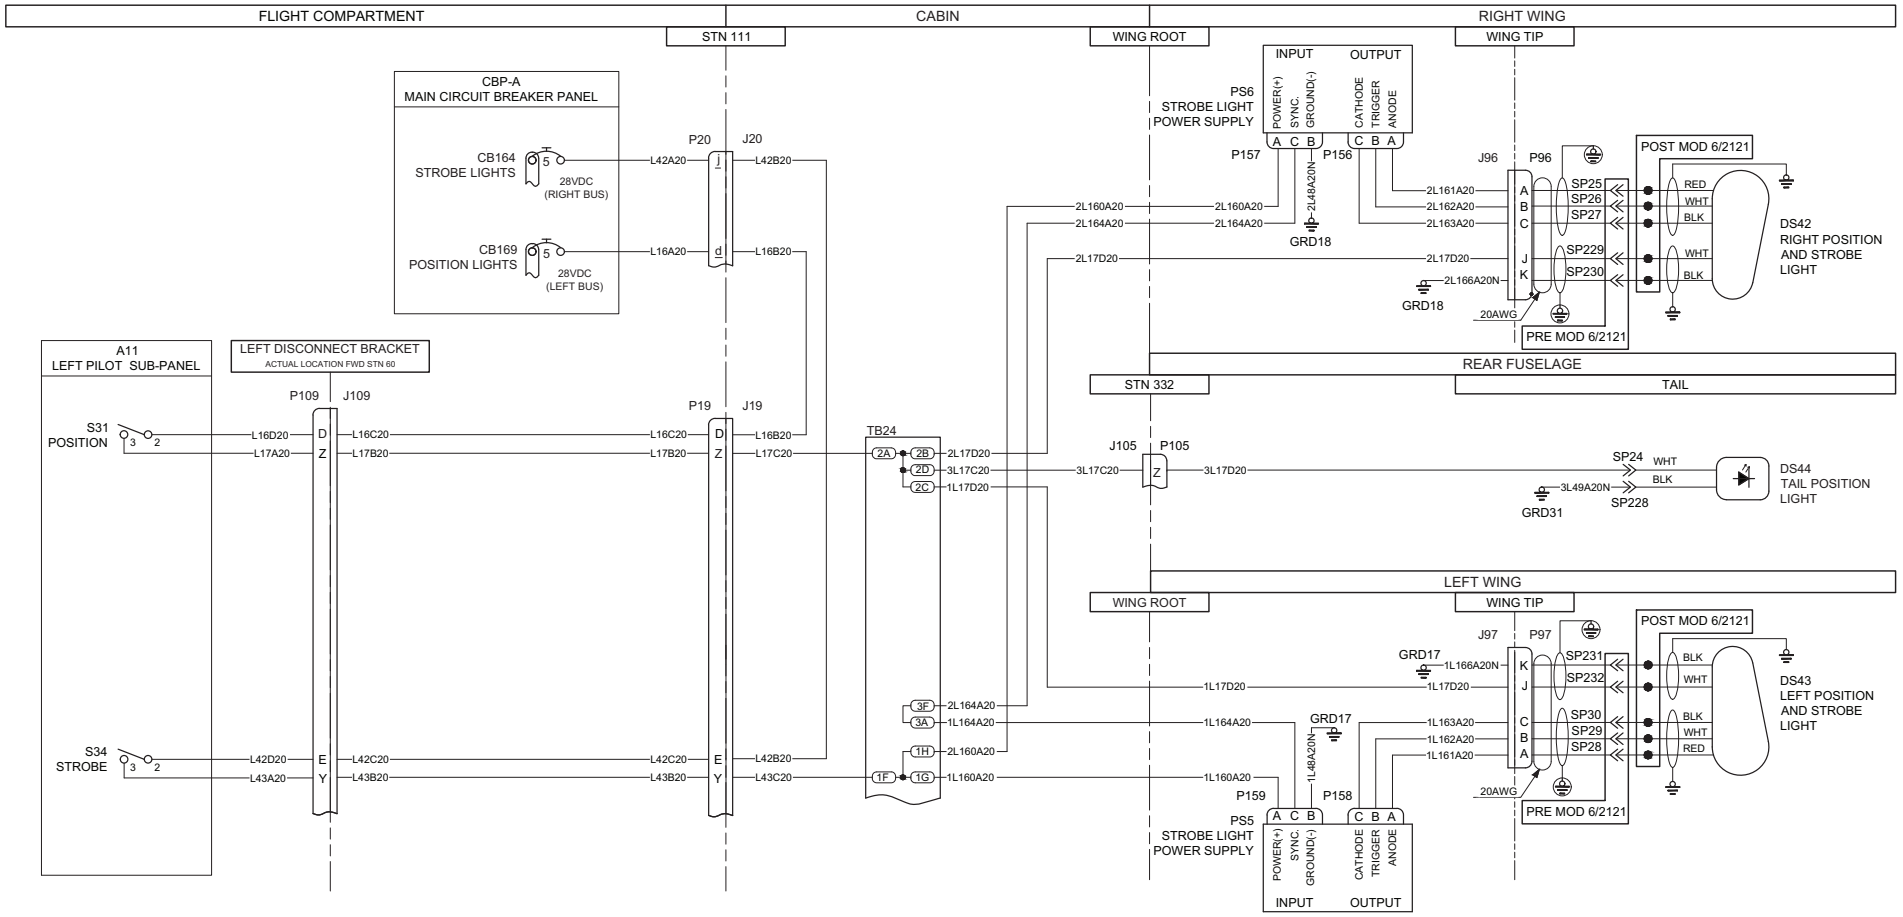


THIS SHEET PRE MOD 6/2447

WING AND TAIL POSITION AND STROBE LIGHTS

SHEET 1 OF 2

C6N1004-25C ISSUE NO. 1 2 3

This Page Intentionally Left Blank

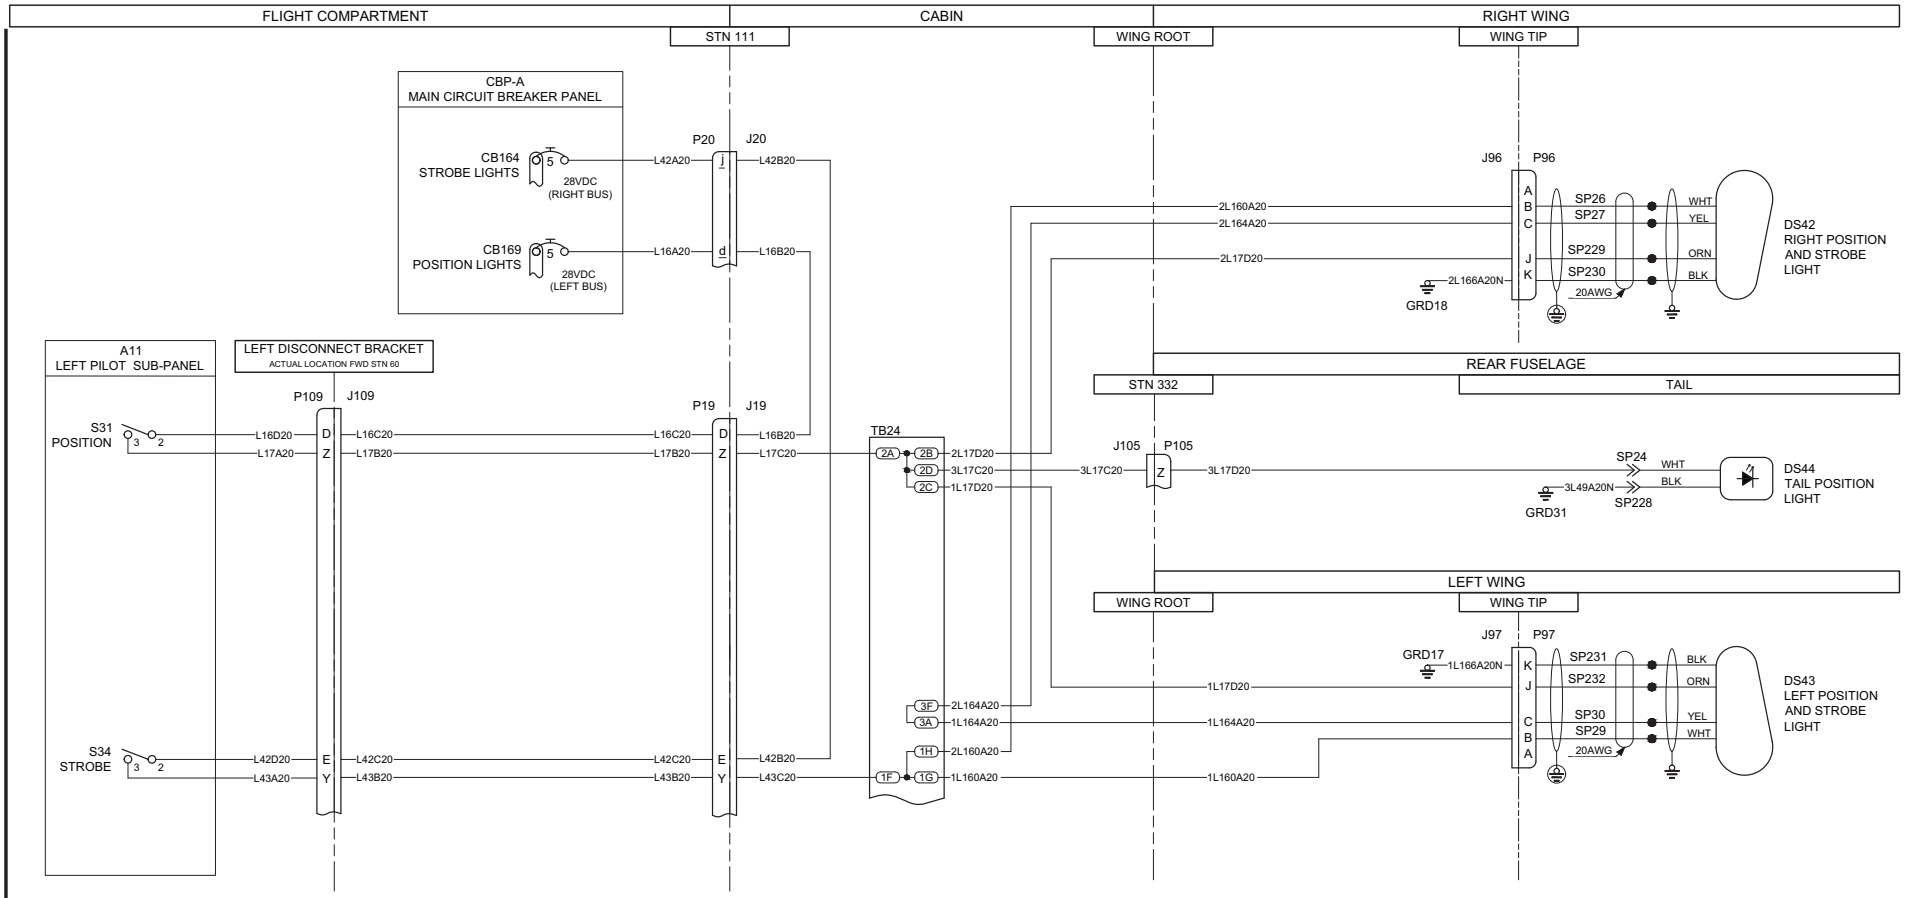

THIS SHEET POST MOD 6/2447

WING AND TAIL POSITION AND STROBE LIGHTS

SHEET 2 OF 2

C6N1004-25C ISSUE NO. 1 2 3

This Page Intentionally Left Blank

CHAPTER 34

NAVIGATION

This Page Intentionally Left Blank

CHAPTER 34 – NAVIGATION

This list shows the effective pages in the manual, with their latest revision date. An asterisk (*) indicates pages added or replaced at the latest revision. Technical changes to the content are indicated by a black vertical line next to the change or the paragraph that contains the change.

REFERENCE	PAGE	DATE	REFERENCE	PAGE	DATE
34	1	Sep. 30/14	34-42-10	1	Sep. 30/14
	2	Blank Page		2	Blank Page
	* 3	Dec. 7/16	34-43-10	1	Sep. 30/14
	* 4	Blank Page		2	Blank Page
	5	Sep. 30/14	34-43-20	1	Sep. 30/14
	6	Sep. 30/14		2	Blank Page
34-21-00	1	Sep. 30/14	34-44-00	* 1	Dec. 7/16
	2	Blank Page		* 2	Blank Page
34-22-00	* 1	Dec. 7/16	34-51-00	* 1	Dec. 7/16
	* 2	Dec. 7/16		* 2	Dec. 7/16
	* 3	Dec. 7/16		* 3	Dec. 7/16
	* 4	Blank Page		* 4	Blank Page
34-23-00	1	Sep. 30/14	34-53-00	* 1	Dec. 7/16
	2	Sep. 30/14		* 2	Dec. 7/16
	3	Sep. 30/14		* 3	Dec. 7/16
	4	Blank Page		* 4	Blank Page
34-41-00	* 1	Dec. 7/16	34-54-00	1	Sep. 30/14
	* 2	Blank Page		2	Blank Page
34-42-00	1	Sep. 30/14	34-56-00	1	Sep. 30/14
	2	Blank Page		2	Blank Page

This Page Intentionally Left Blank


CHAPTER 34 – NAVIGATION

TABLE OF CONTENTS

SUBJECT	CHAPTER SECTION SUBJECT
ATTITUDE AND DIRECTION	**34-20**
– FLIGHT CONTROLLER	**34-21**
Flight Controller	34-21-00
– EMERGENCY STANDBY INSTRUMENT SYSTEM	**34-22**
Emergency Standby Instrument System (ESIS)	34-22-00
– AIR DATA, ATTITUDE AND HEADING REFERENCE SYSTEM	**34-23**
Air Data, Attitude, and Heading Reference System (ADAHRS)	34-23-00
INDEPENDENT POSITION DETERMINING	**34-40**
– WEATHER RADAR	**34-41**
Weather Radar System	34-41-00
– RADAR ALTIMETER	**34-42**
Radar Altimeter	34-42-00
2nd Radar Altimeter (S.O.O. 6218)	34-42-10
– TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM (TCAS)	**34-43**
TCAS I	34-43-10
TCAS II (S.O.O. 6219)	34-43-20
– GROUND PROXIMITY WARNING	**34-44**
Enhanced Ground Proximity Warning System (EGPWS)	34-44-00
DEPENDENT POSITION DETERMINING	**34-50**
– DIGITAL RADIOS	**34-51**
Multi-mode Digital Radio (MMDR) (Includes S.O.O. 6217)	34-51-00
– TRANSPONDERS	**34-53**
Transponders	34-53-00
– DISTANCE MEASURING	**34-54**
Distance Measuring Equipment (DME)	34-54-00

TABLE OF CONTENTS

SUBJECT	CHAPTER SECTION SUBJECT
– GLOBAL NAVIGATION	**34-56**
Global Navigation Satellite Sensor Unit (GNSSU)	34-56-00

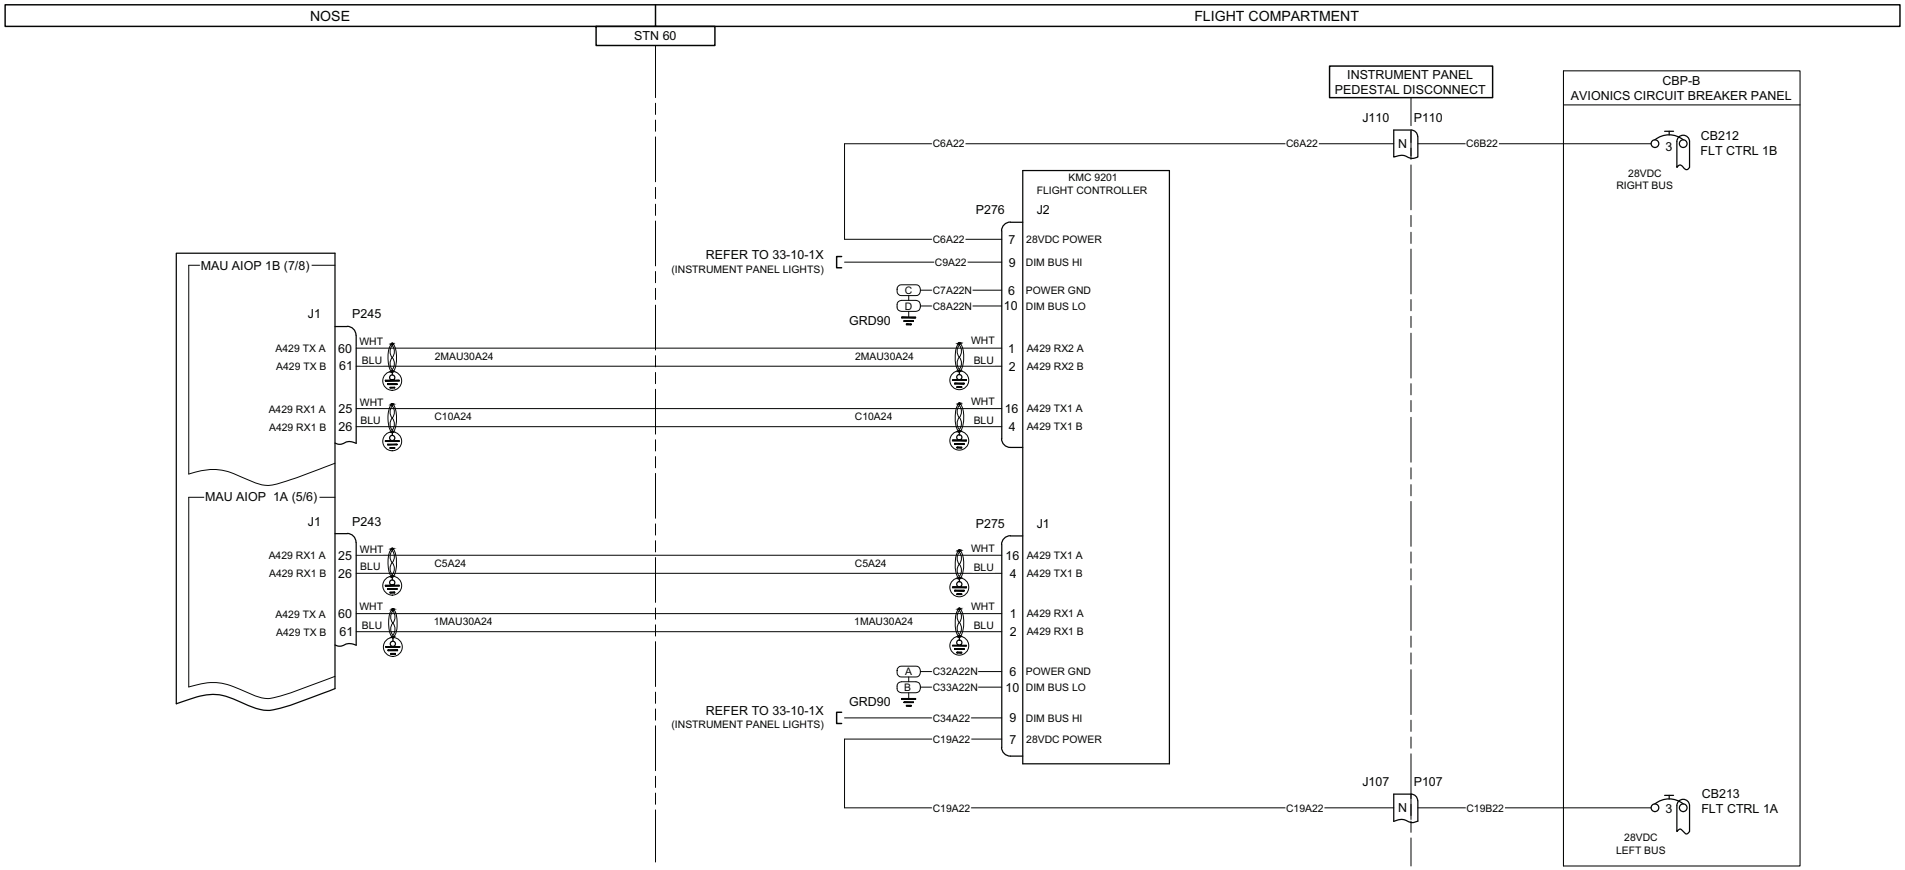


FLIGHT CONTROLLER

SHEET 1 OF 1

C6N1004-71 ISSUE NO. 1

This Page Intentionally Left Blank

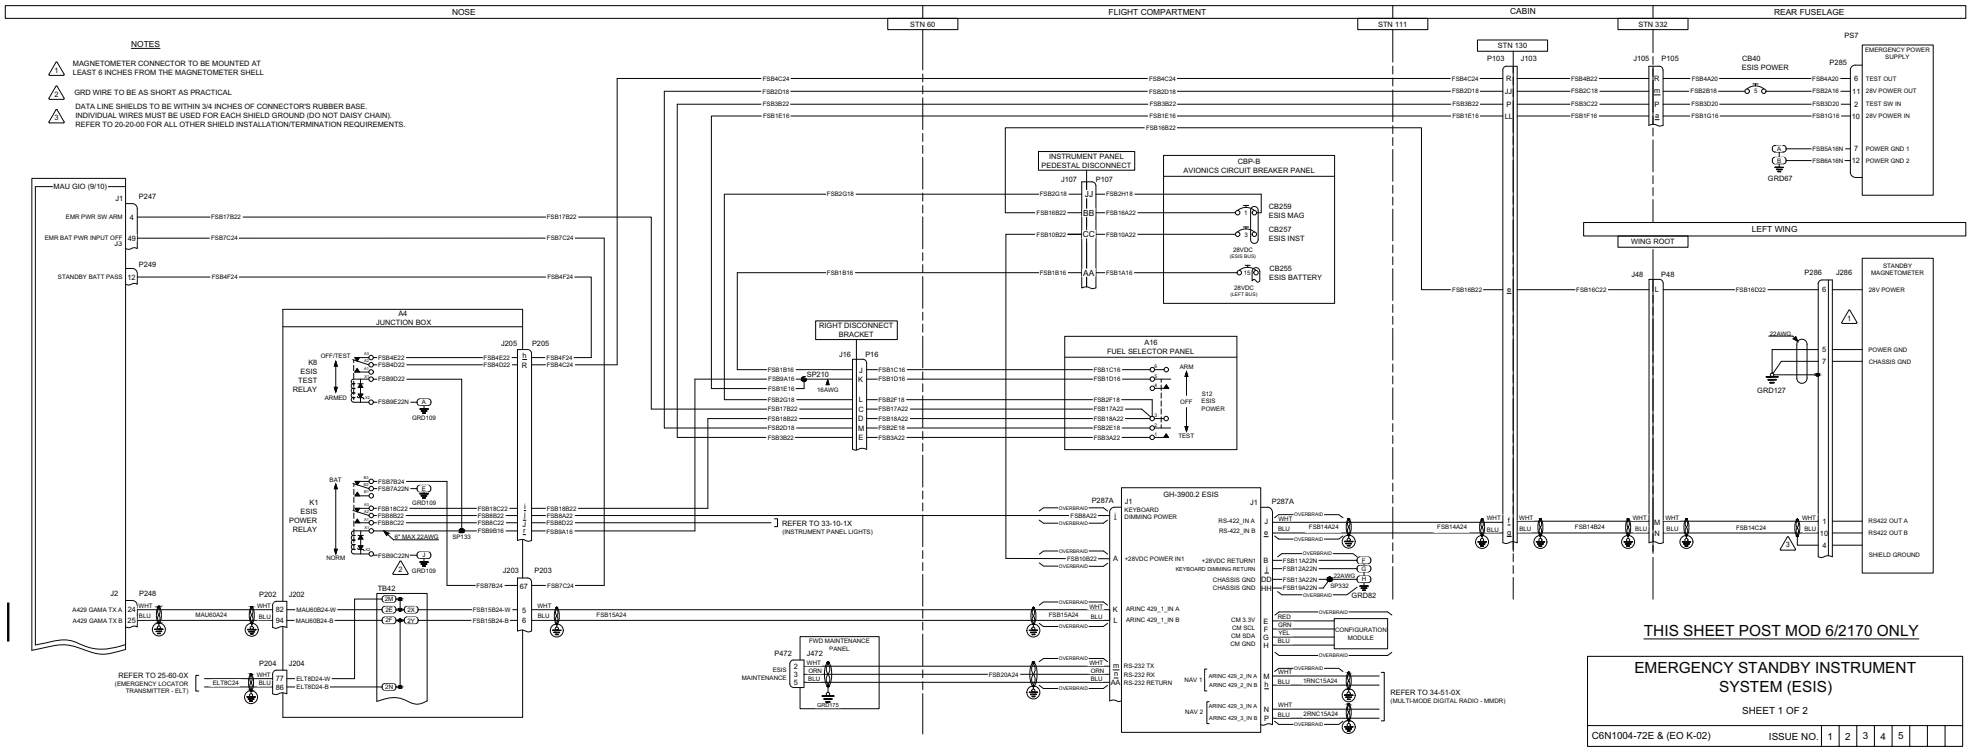


THIS SHEET POST MOD 6/2170 ONLY

EMERGENCY STANDBY INSTRUMENT SYSTEM (ESIS)

SHEET 1 OF 2

C6N1004-72E & (EO K-02) ISSUE NO. 1 2 3 4 5

This Page Intentionally Left Blank

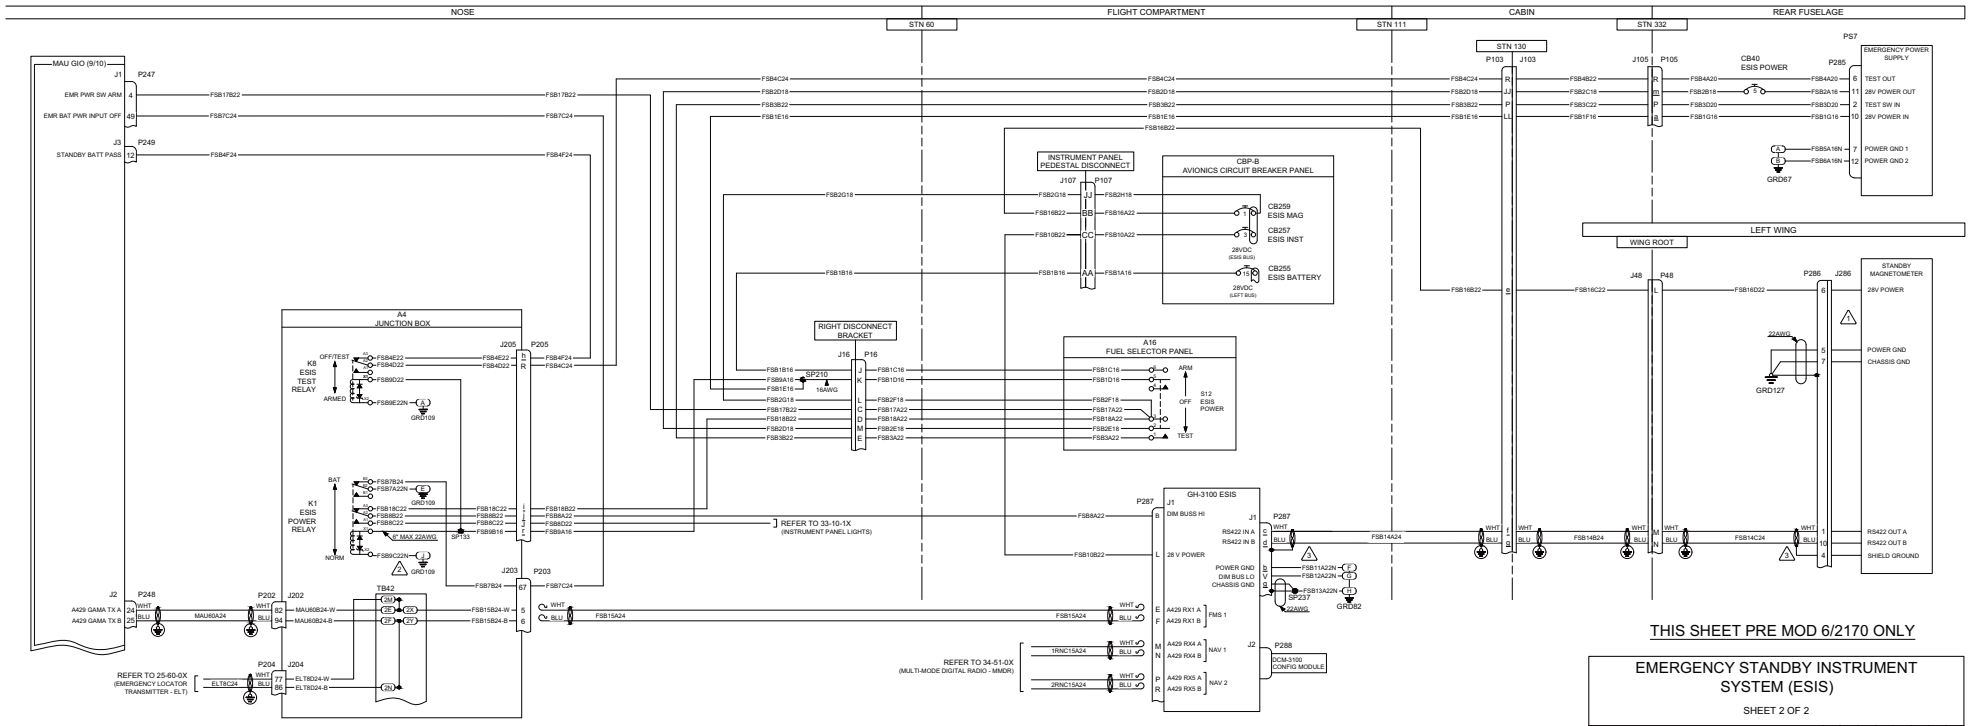


THIS SHEET PRE MOD 6/2170 ONLY

EMERGENCY STANDBY INSTRUMENT SYSTEM (ESIS)

SHEET 2 OF 2

C6N1004-72E & (EO K-02) ISSUE NO. 1 2 3 4 5

This Page Intentionally Left Blank

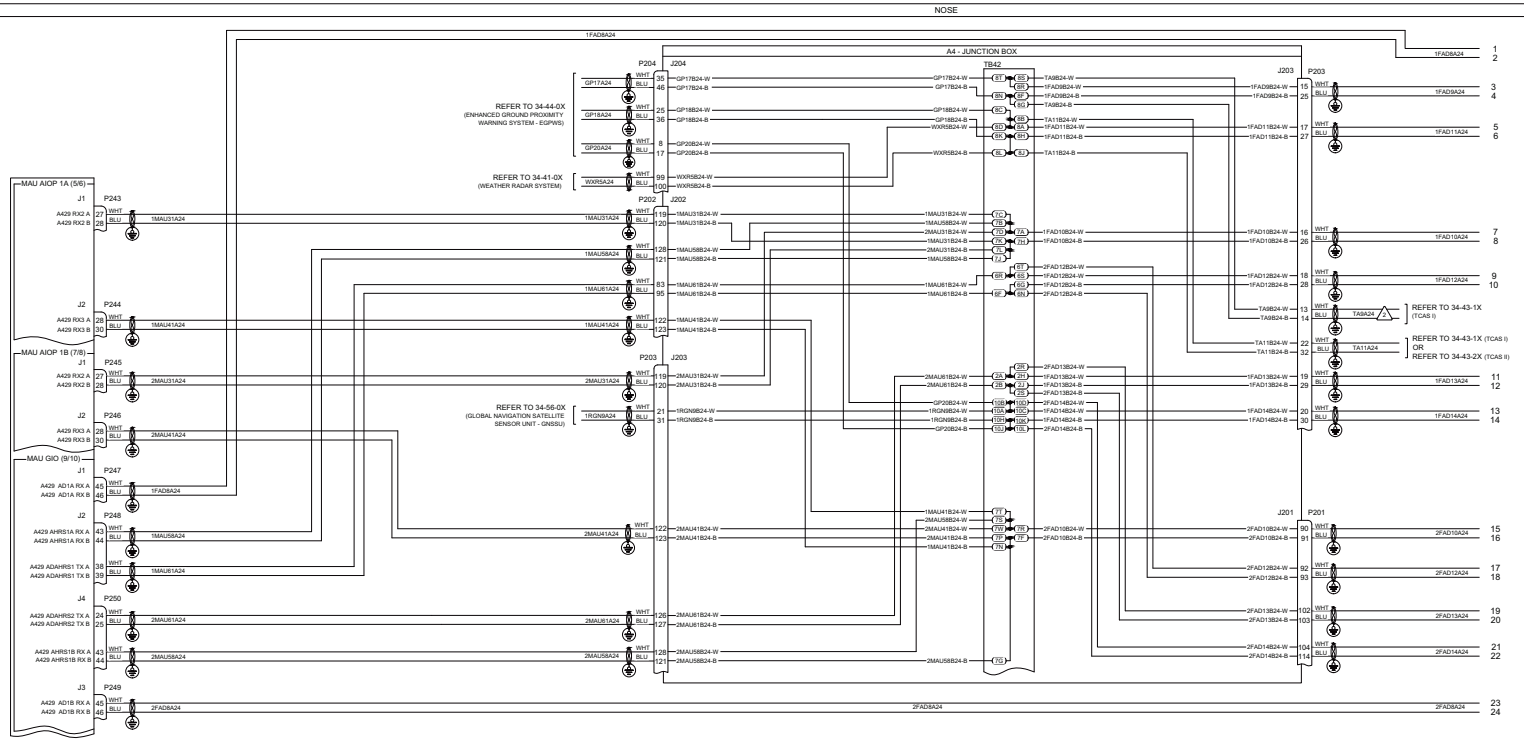

NOTES


1. WIRE INSTALLED WITH TCAS II ONLY (S.O.O. 6219 INSTALLED)
2. WIRE INSTALLED WITH TCAS I ONLY (S.O.O. 6219 NOT INSTALLED)
3. MAGNETOMETER CAN BUS. (REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)
4. TERMINATE ON GROUND LUG INTERNAL TO BACKSHELL WIRE MUST REMAIN INSIDE BACKSHELL AND BE NO LONGER THAN 6 INCHES
5. WIRE FAD23A18N AND P282A INSTALLED WITH STAINLESS STEEL OAT SENSOR INSTALLATION ONLY (S.O.O. 6304 INSTALLED)

AIR DATA, ATTITUDE AND HEADING REFERENCE SYSTEM (ADAHRS)

SHEET 1 OF 2

C6N1004-73C (EO-H-04) ISSUE NO. 1 2 3

This Page Intentionally Left Blank

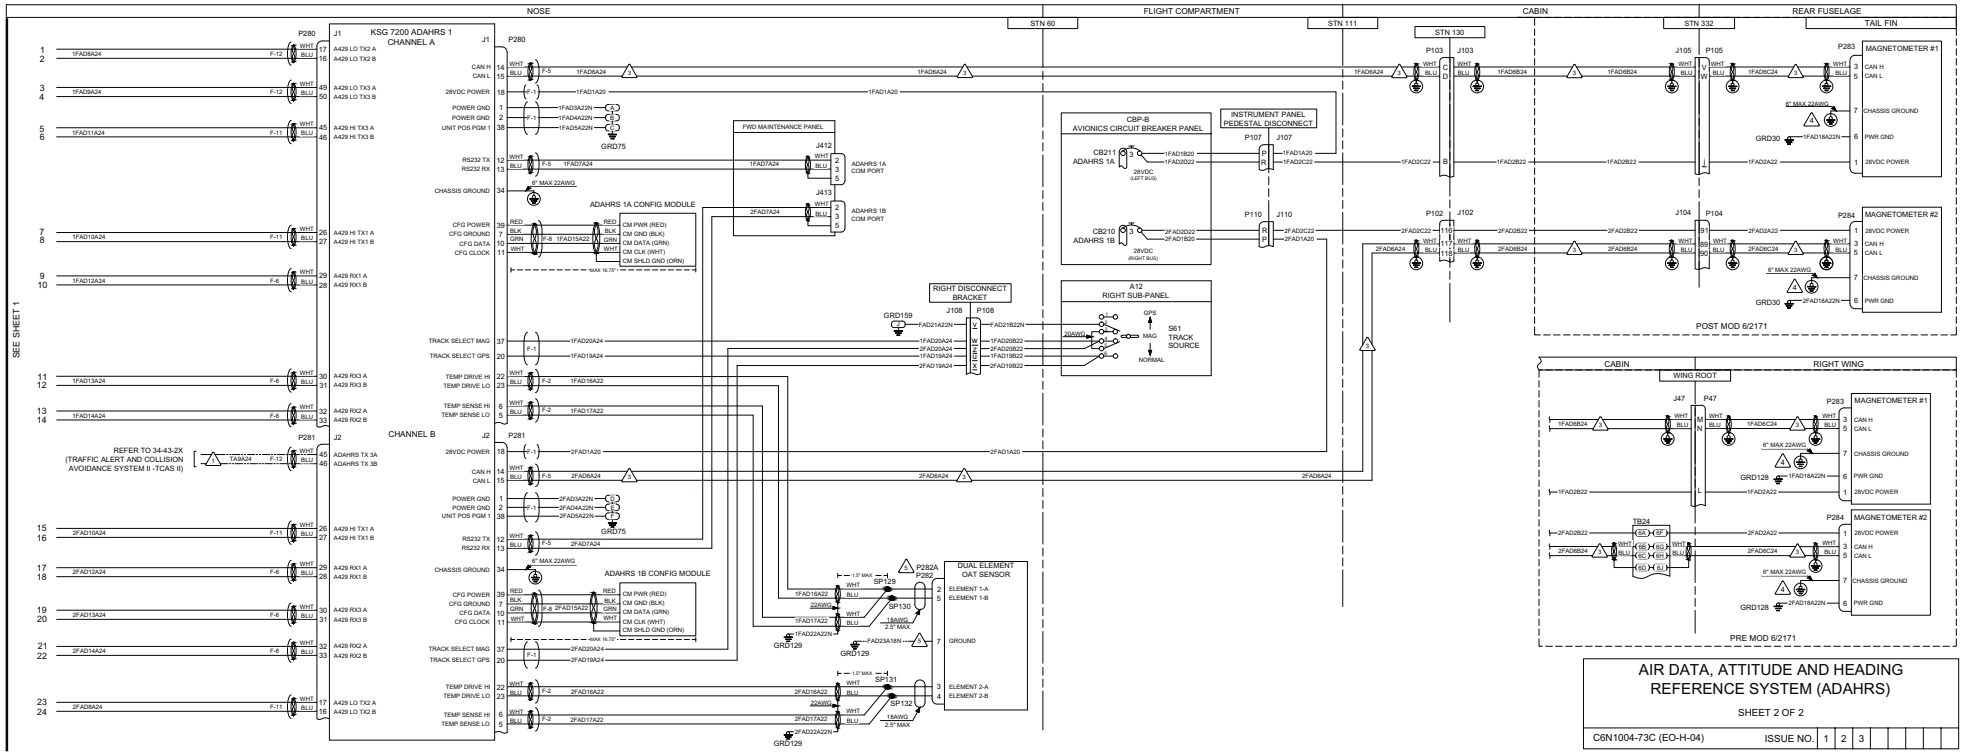


AIR DATA, ATTITUDE AND HEADING REFERENCE SYSTEM (ADAHRS)

SHEET 2 OF 2

C6N1004-73C (EO-H-04) ISSUE NO. 1 2 3

This Page Intentionally Left Blank

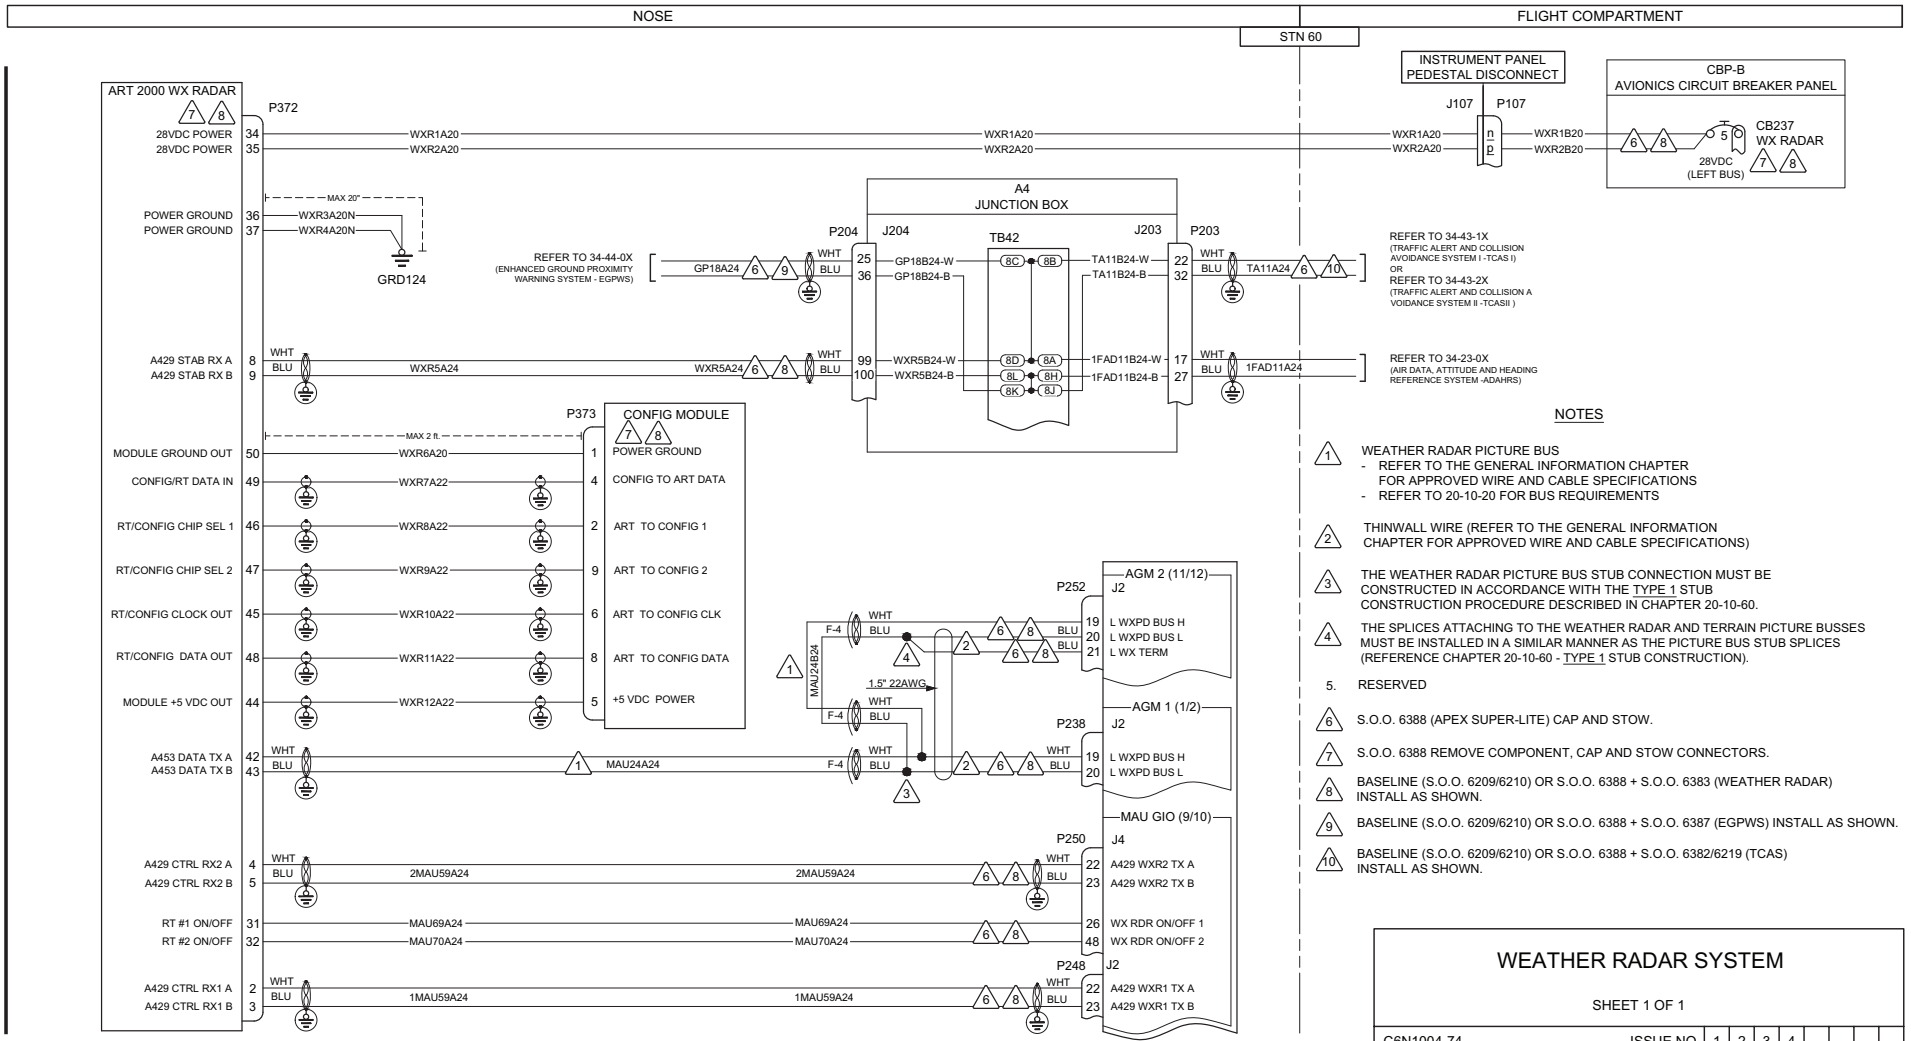

NOTES


1. WEATHER RADAR PICTURE BUS
   - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS
   - REFER TO 20-10-20 FOR BUS REQUIREMENTS
2. THINWALL WIRE (REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED WIRE AND CABLE SPECIFICATIONS)
3. THE WEATHER RADAR PICTURE BUS STUB CONNECTION MUST BE CONSTRUCTED IN ACCORDANCE WITH THE TYPE 1 STUB CONSTRUCTION PROCEDURE DESCRIBED IN CHAPTER 20-10-60.
4. THE SPLICES ATTACHING TO THE WEATHER RADAR AND TERRAIN PICTURE BUSSES MUST BE INSTALLED IN A SIMILAR MANNER AS THE PICTURE BUS STUB SPLICES (REFERENCE CHAPTER 20-10-60 - TYPE 1 STUB CONSTRUCTION).
5. RESERVED
6. S.O.O. 6388 (APEX SUPER-LITE) CAP AND STOW.
7. S.O.O. 6388 REMOVE COMPONENT, CAP AND STOW CONNECTORS.
8. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 + S.O.O. 6383 (WEATHER RADAR) INSTALL AS SHOWN.
9. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 + S.O.O. 6387 (EGPWS) INSTALL AS SHOWN.
10. BASELINE (S.O.O. 6209/6210) OR S.O.O. 6388 + S.O.O. 6382/6219 (TCAS) INSTALL AS SHOWN.

WEATHER RADAR SYSTEM

SHEET 1 OF 1

C6N1004-74	ISSUE NO.	1	2	3	4				

This Page Intentionally Left Blank

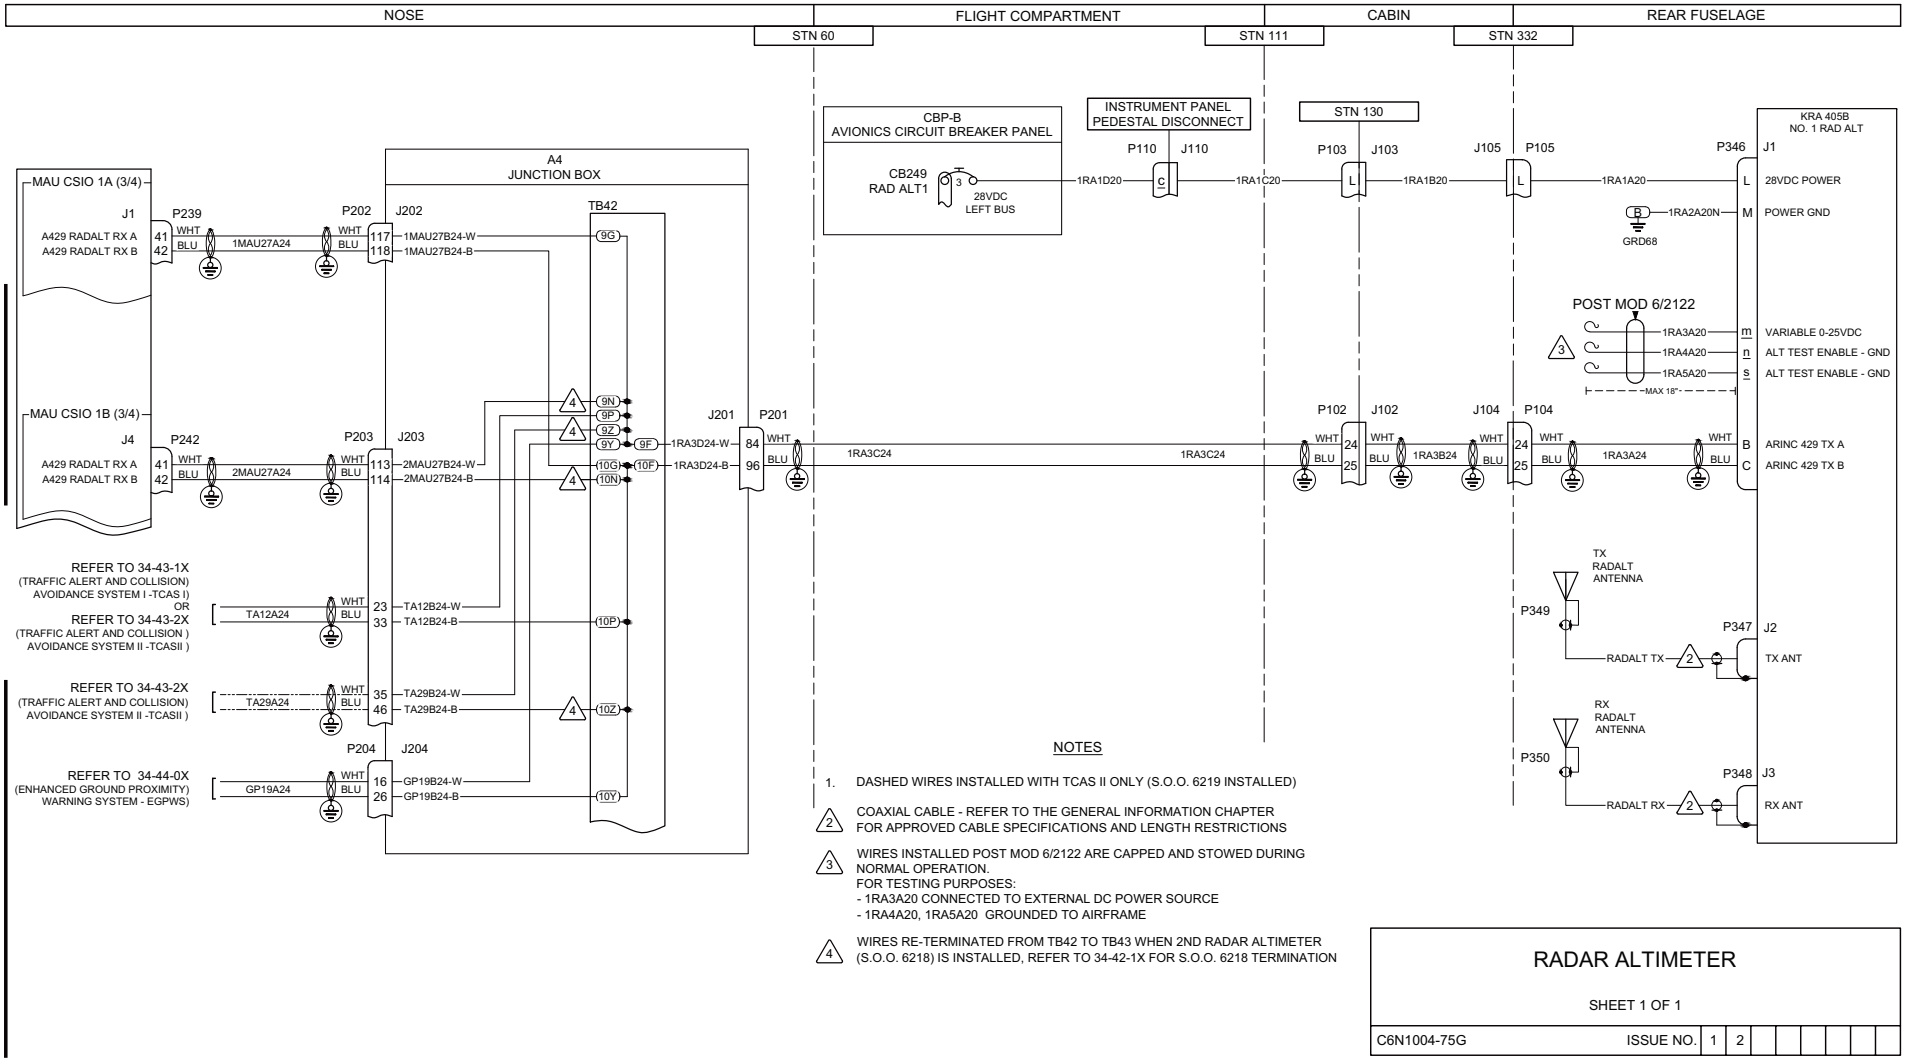

NOTES

1. DASHED WIRES INSTALLED WITH TCAS II ONLY (S.O.O. 6219 INSTALLED)

2. COAXIAL CABLE - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED CABLE SPECIFICATIONS AND LENGTH RESTRICTIONS

3. WIRES INSTALLED POST MOD 6/2122 ARE CAPPED AND STOWED DURING NORMAL OPERATION.
FOR TESTING PURPOSES:
- 1RA3A20 CONNECTED TO EXTERNAL DC POWER SOURCE
- 1RA4A20, 1RA5A20 GROUNDED TO AIRFRAME


4. WIRES RE-TERMINATED FROM TB42 TO TB43 WHEN 2ND RADAR ALTIMETER (S.O.O. 6218) IS INSTALLED, REFER TO 34-42-1X FOR S.O.O. 6218 TERMINATION

RADAR ALTIMETER

SHEET 1 OF 1

C6N1004-75G ISSUE NO. 1 2

This Page Intentionally Left Blank

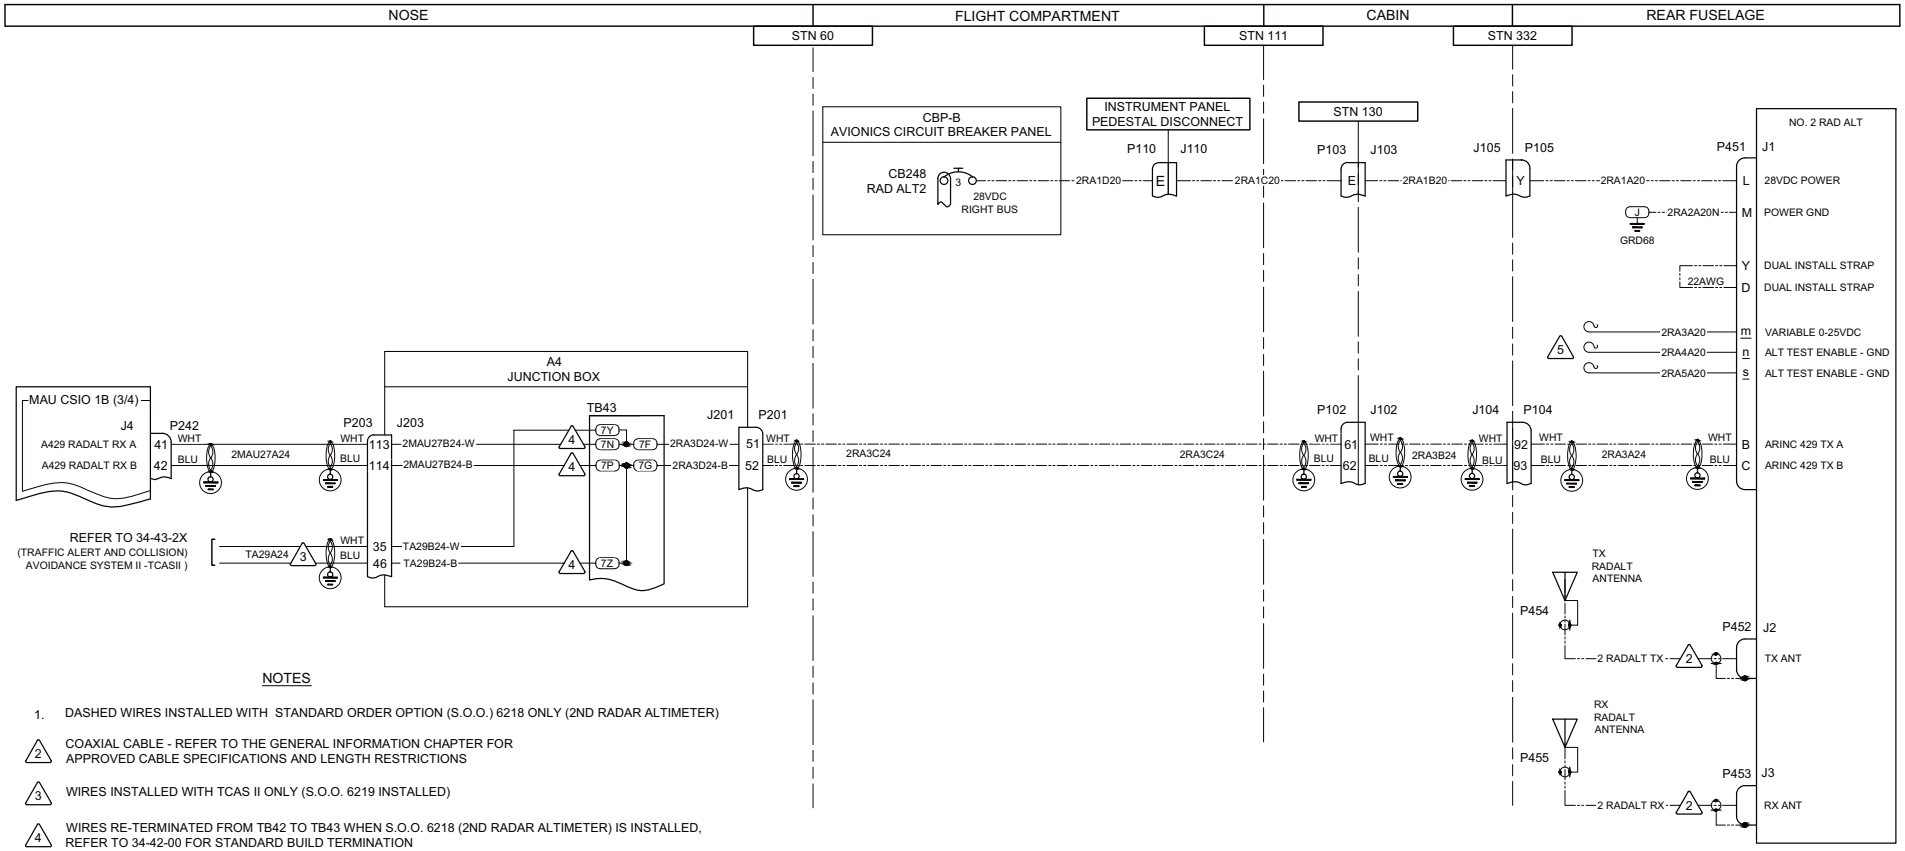

NOTES

1. DASHED WIRES INSTALLED WITH STANDARD ORDER OPTION (S.O.O.) 6218 ONLY (2ND RADAR ALTIMETER)

2. COAXIAL CABLE - REFER TO THE GENERAL INFORMATION CHAPTER FOR APPROVED CABLE SPECIFICATIONS AND LENGTH RESTRICTIONS

3. WIRES INSTALLED WITH TCAS II ONLY (S.O.O. 6219 INSTALLED)

4. WIRES RE-TERMINATED FROM TB42 TO TB43 WHEN S.O.O. 6218 (2ND RADAR ALTIMETER) IS INSTALLED, REFER TO 34-42-00 FOR STANDARD BUILD TERMINATION

5. CAPPED AND STOWED DURING NORMAL OPERATION.
FOR TESTING PURPOSES:
- 2RA3A20 CONNECTED TO EXTERNAL DC POWER SOURCE
- 2RA4A20, 2RA5A20 GROUNDED TO AIRFRAME

2ND RADAR ALTIMETER (S.O.O. 6218)

SHEET 1 OF 1

C6N1004-111 ISSUE NO. 1

This Page Intentionally Left Blank