Communications – General Data

1. General

The communications system comprise of two Very High Frequency Communication (VHF COM) systems, two VHF COM antenna's, and the pilot's and co-pilot's headset communication system. The VHF COM systems are integrated transceivers of the Multi-Mode Digital Radio (MMDR). Provisions have also been made for HF Communications system and for passenger address system, if installed (refer to 44-00-00, Cabin Systems – General Data).


The communications systems are supplied with 28 Volt DC from the aircraft electrical system through the circuit breakers refer to PSM 1-64-2W for electrical details.

2. Antenna

Location for the Communication antennas are listed in Table 1 — Antenna Locations.


Table 1 Antenna Locations

ITEM	ANTENNA	PRODUCT	FUNCTION	TYPE
1	VHF Upper Aft	Comant CI–108–1–L	Main VHF communications system – Provides air-to-air and/or air-to-ground voice (AM) in the VHF band	
2	VHF Forward	Comant CI–108–1–L	Main VHF communications system – Provides air-to-air and/or air-to-ground voice in the VHF band	
3	VHF Upper Aft	Comant CI–108–1–L	S.O.O. 6231 Alternate VHF communications system – Provides air-to-air and/or air-to-ground voice in the VHF band	
4	HF Radio with Coupler		S.O.O. 6215 HF communications system – Provides air-to-air and/or air-to-ground voice in the VHF band	
5	VHF-FM	Comant CI–295–200	S.O.O. 6296 VHF-FM – Provides voice communications in the 138.000 to 174.000 MHz frequency range of the VHF band.	

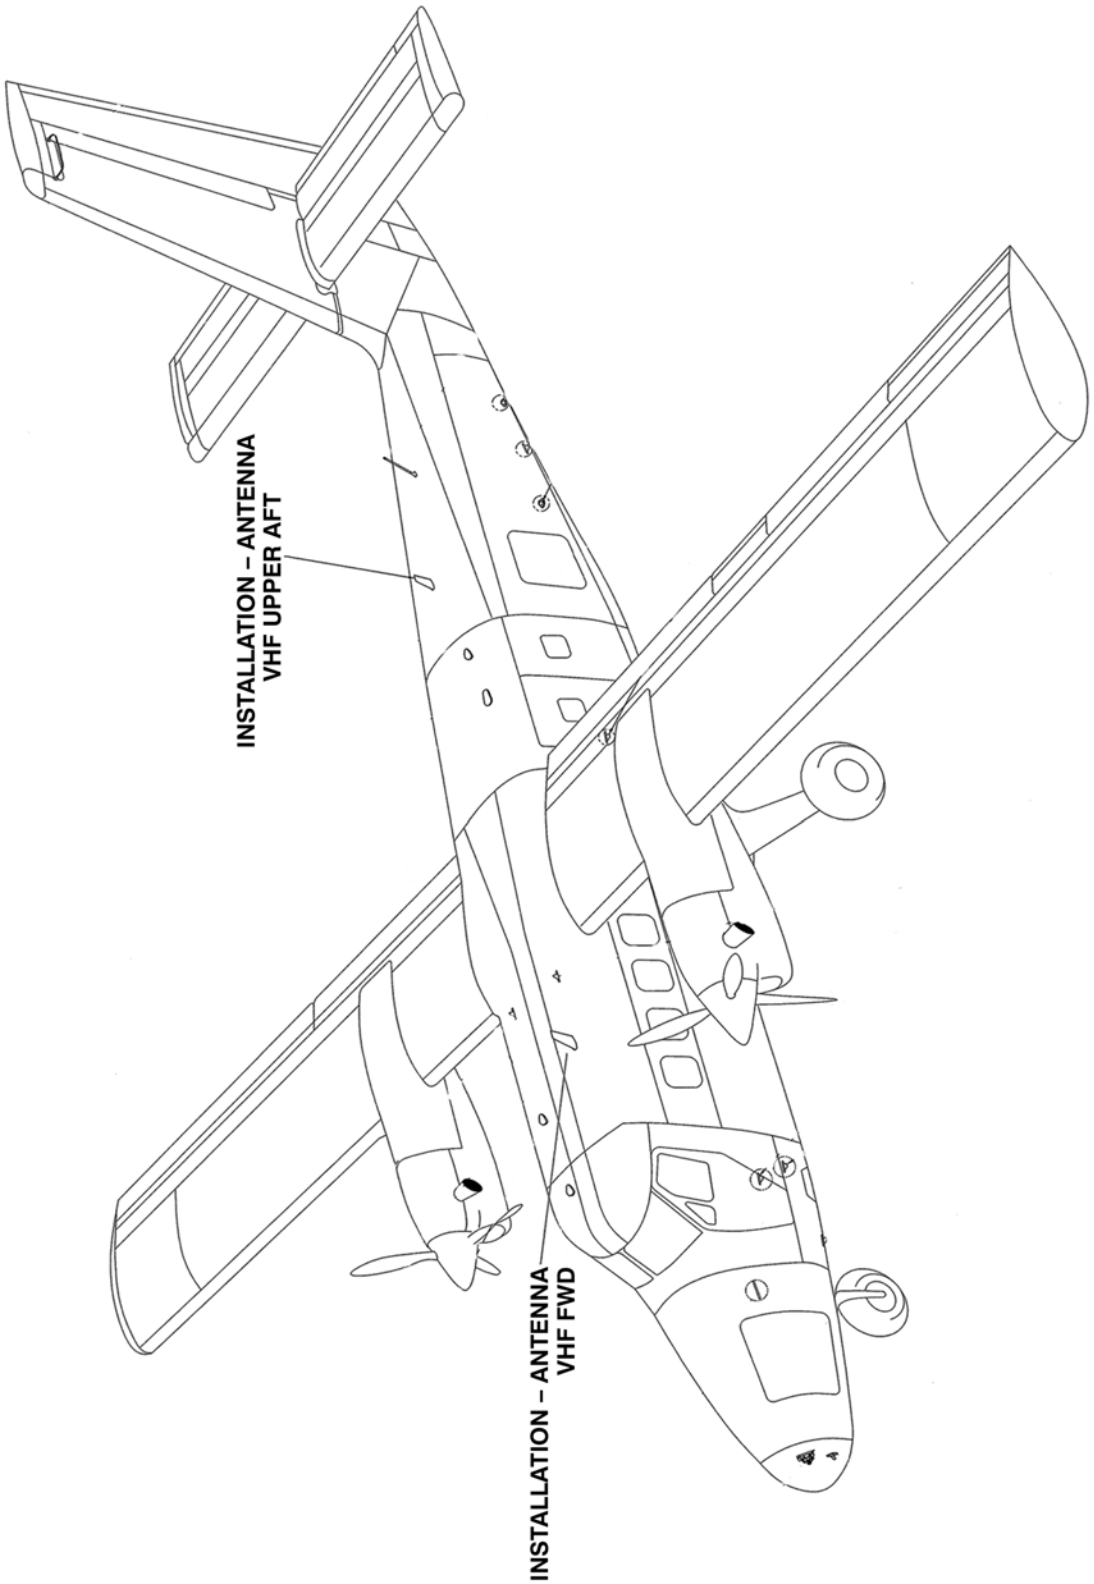

General Arrangement – Avionics Antennas
Figure 1

Print Date: 2025-09-12

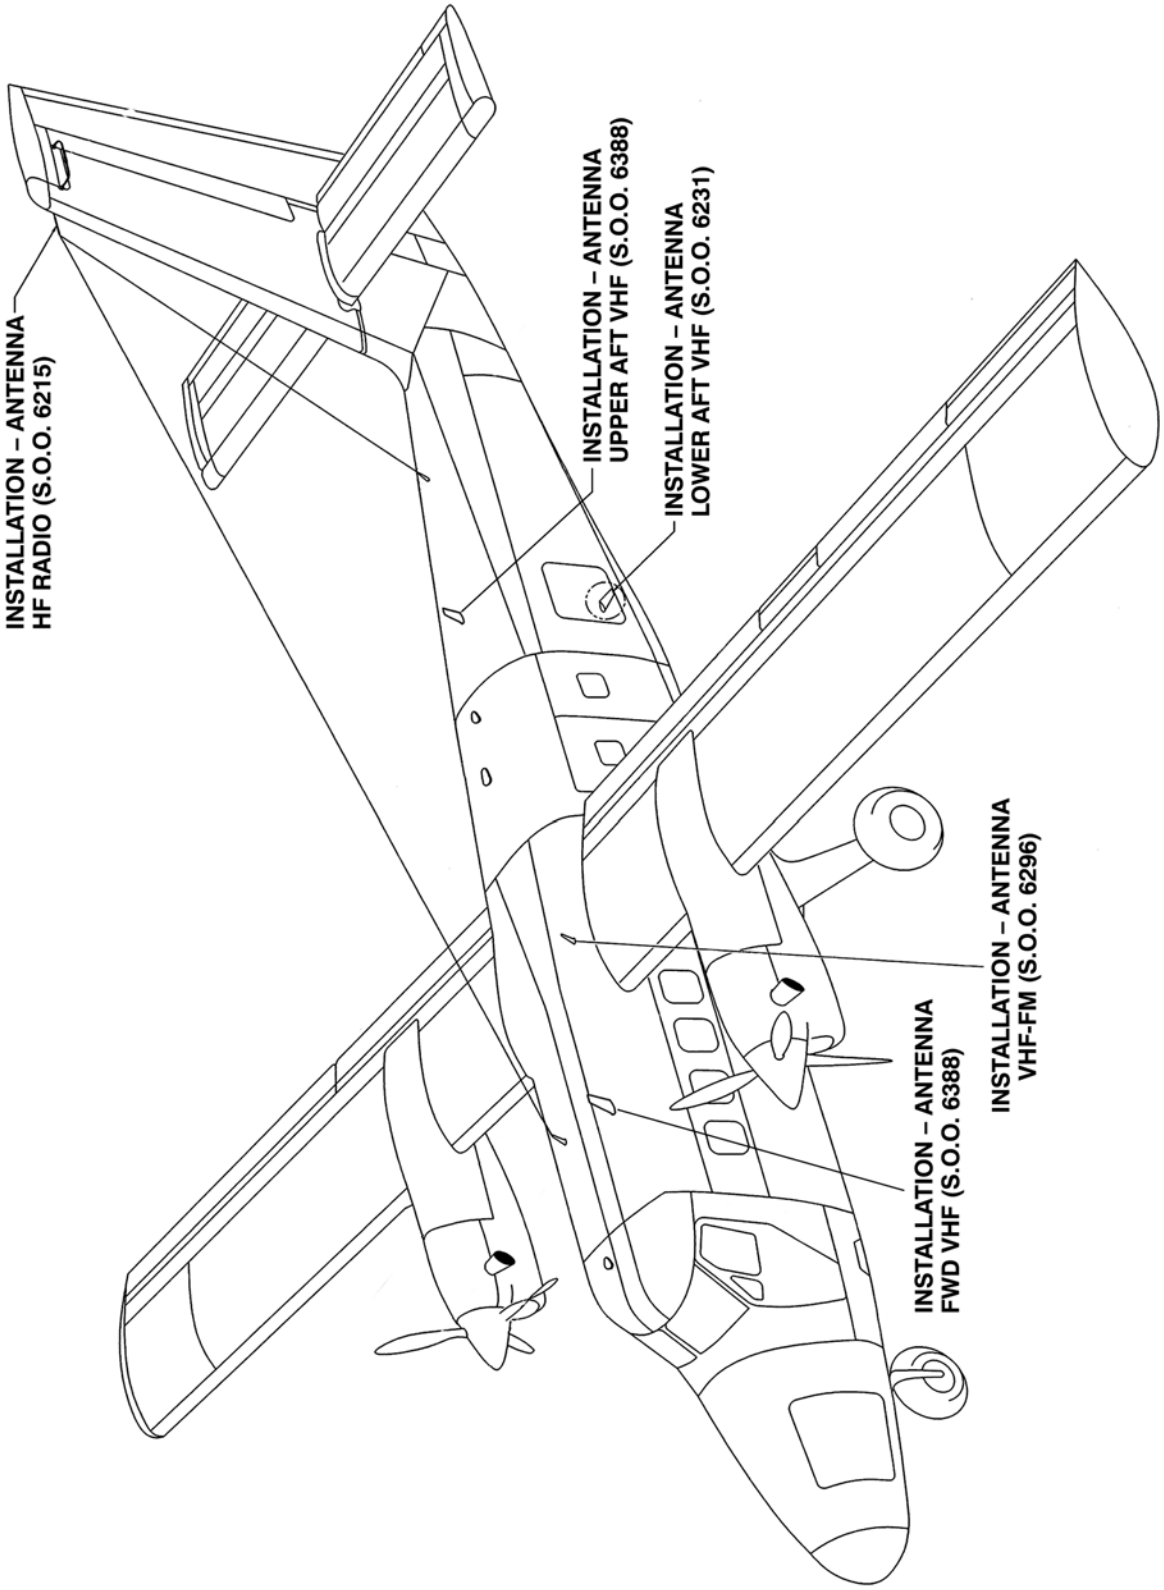

General Arrangement – Customer Option Antennas
Figure 2

Print Date: 2025-09-12

This Page Intentionally Left Blank