Cleaning – General Data

1. General

Directions are outlined for cleaning the engine, windshield, cabin windows, floor panels, upholstery, display screens and fuel gallery.

2. Engine Cleaning


WARNING ALL PERSONNEL AND EQUIPMENT MUST BE KEPT CLEAR OF PROPELLER WHEN CARRYING OUT ENGINE CLEANING.

A. Engine Compressor Wash

1) General

An engine compressor wash may be carried out with the engine motoring, depending on requirements. Motoring washes are done using a wash wand (refer to Pratt and Whitney Engine Maintenance Manual) at the engine air inlet screen.

All engine compressor washes must be carried out strictly in accordance with instructions given in the Pratt and Whitney Engine Maintenance Manual.

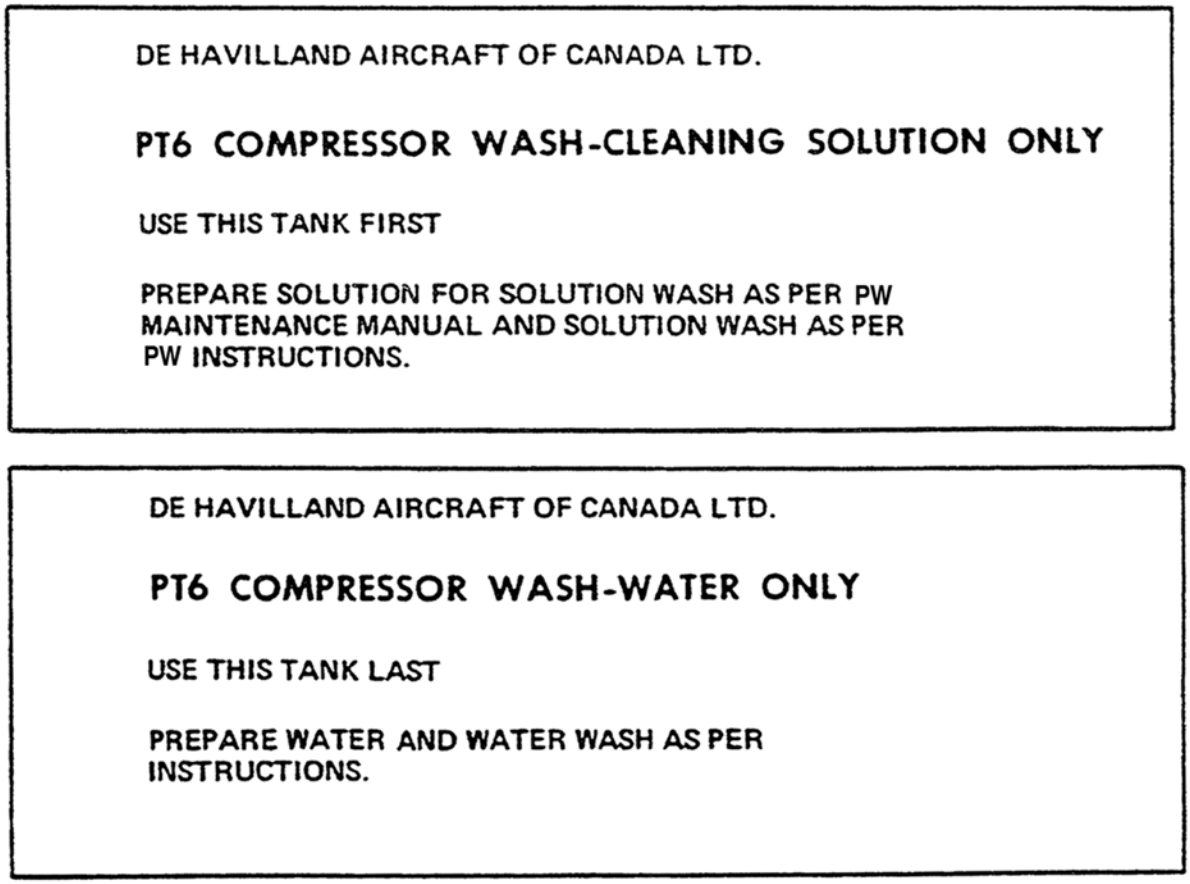

Instruction Labels – Engine Wash System Compression Tank Rig
Figure 1

2) Wash Procedures

a) Ensure engine is shutdown.

b) Fill compression tanks of engine wash rig (Mod 6/1507) as required for type of wash, in accordance with instructions on tank labels. (Refer to Figure 1).

c) Connect engine wash rig as follows:

1 Aircraft fitted spray ring connection is located at inboard side of engine nacelle (refer to Figure 2 for details).

2 For compressor wash with engine motoring, connect rig to wash wand and position wand at engine air inlet screen.

d) Start up or motor engine and proceed with appropriate engine compressor wash in accordance with instructions given in Pratt and Whitney Engine Maintenance Manual.


e) On completion of satisfactory compressor wash, shutdown engine or stop motoring, disconnect wash rig from spray ring or wash wand, and cap line connection in aircraft fitted spray ring. Remove engine compressor wash rig from vicinity of aircraft.

B. External Engine Wash

1) General

All external engine washes must be carried out strictly in accordance with instructions given in the Pratt and Whitney Engine Maintenance Manual.

Note After external engine wash, ensure there is no water accumulation in the nacelle structure including the nacelle engine mounts and vibration isolators.

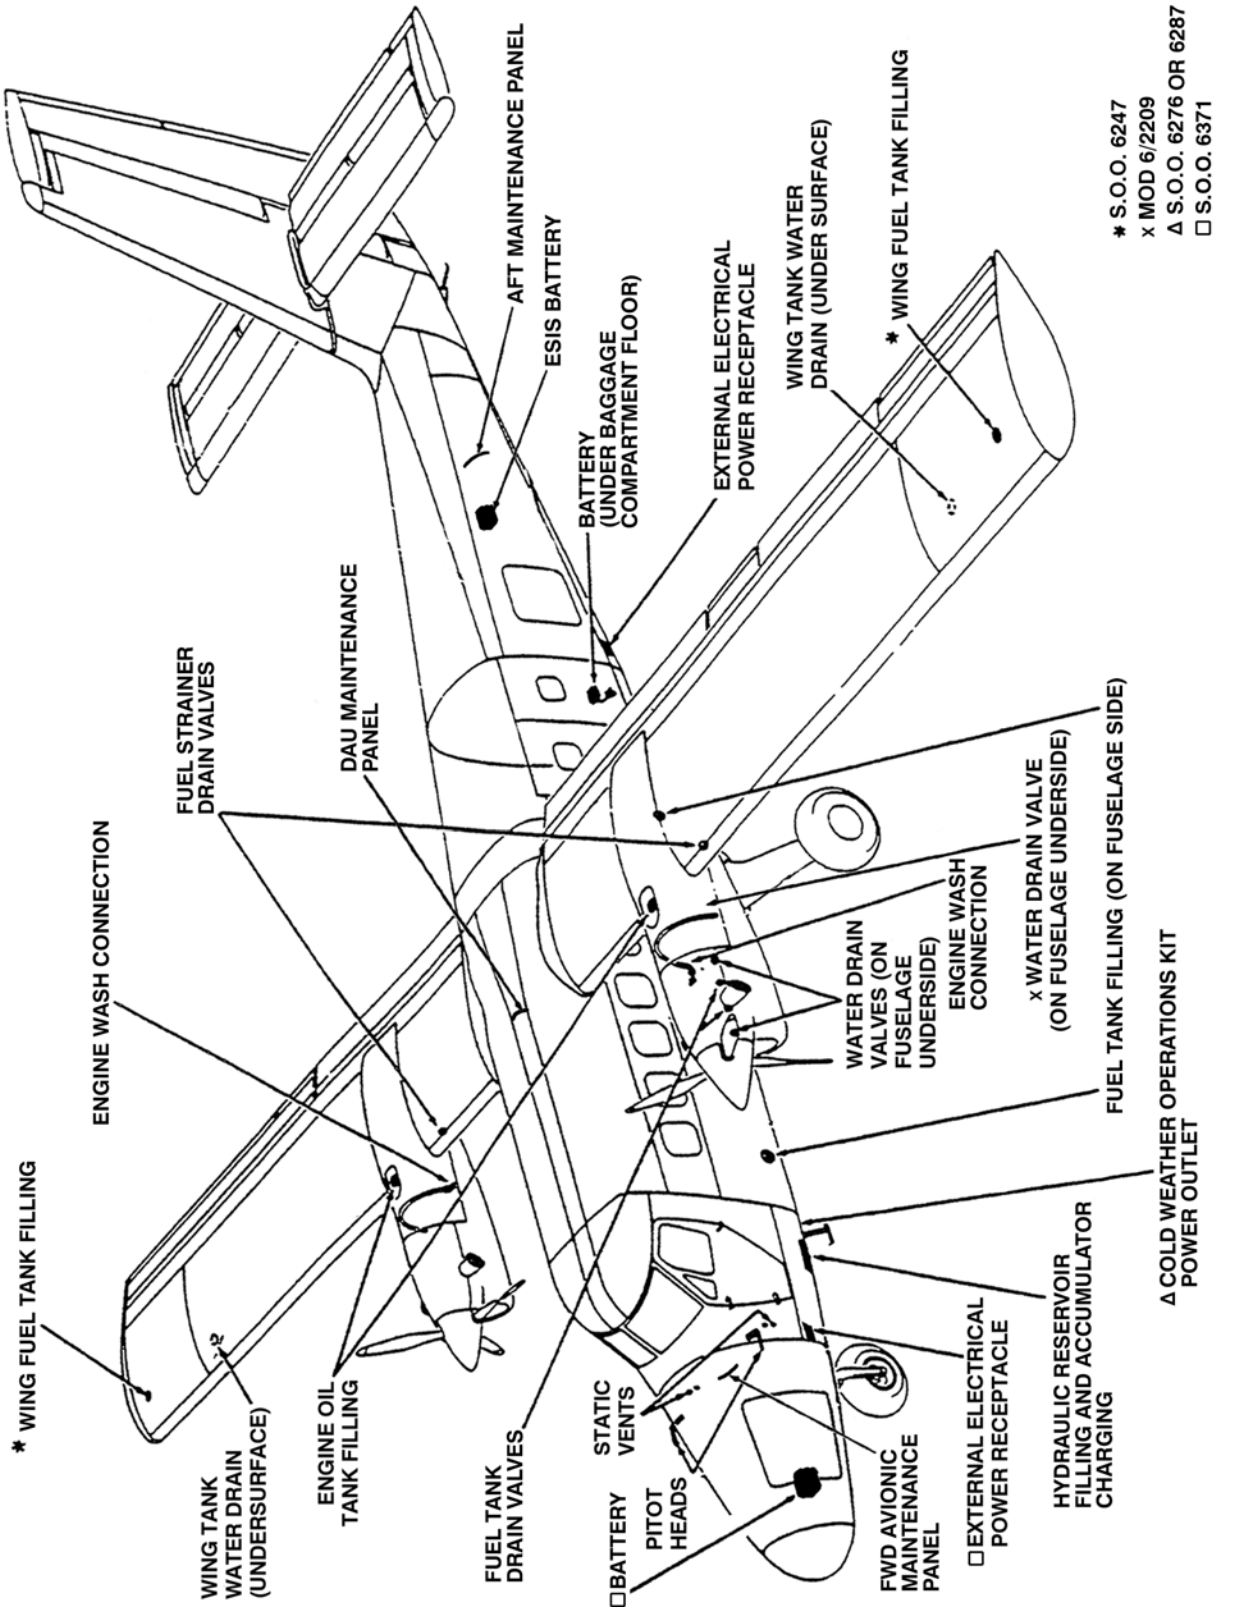

Servicing Diagram
Figure 2

Print Date: 2025-09-12

3. Cleaning Windshield and Cabin Windows

To clean windshield and cabin windows, use copious quantities of soap and water applied by sponge or rag. Any rubbing necessary to remove obstinate spots of dirt should be done with bare hands so that static electricity (which will attract dust) is not generated. After cleaning, polish with Anti-static Plastic Cleaner and finish with a clean, dry, soft cloth to a high polish.

4. Cleaning Floor Panels (Post Mod 6/2027)

CAUTION NEVER USE PAINT THINNERS, ACETONE, MEK OR OTHER SOLVENT BASED CHEMICALS TO CLEAN FLOOR PANELS OR MATS. OTHER CHEMICALS MAY DAMAGE THE FLOOR PANELS OR MATS. IF YOU ARE UNSURE, TRY IT ON A SMALL SECTION BEFORE APPLYING IT TO THE FLOOR PANEL OR MAT.

General cleaning of floor panels and mats should be carried out using normal detergent sprayed or wiped onto the surface and wiped off with a clean cloth. Use clean water and a clean cloth to remove remaining residue.

CAUTION USE ONLY NORMAL DETERGENT AND WATER TO CLEAN FLOOR MATS. OTHER CHEMICALS MAY DAMAGE THE FLOOR MATS.

On floor panels only, methylated spirits are also useful for some marks and stains. Also on floor panels only, remove stubborn or oily marks with Jet A-1 (kerosene) or mineral turpentine followed by normal detergent, water, and a clean cloth to remove any traces and smell.

5. Cleaning Coin Mat Floor Covers

A. Clean coin mat floor covering with warm water and mild commercial soap.

CAUTION DO NOT USE BLEACH OR HARSH CHEMICALS.

B. Dry thoroughly.

6. Cleaning Upholstery

A. Cleaning Polyvinyl Upholstery (Pre Mod 6/2281)

1) Easy Maintenance

a) All commercial cleaning agents and solvents can be used, including bleach.

2) Stain Removal

Almost all stains can be removed or improved if blotted up immediately, while still wet or fresh.

a) Use a white or light coloured paper towel, tissues, or any absorbent fabric and blot away at the stain.

b) Keep blotting and changing the absorbent material until the spill or coloured matter is no longer being removed.

c) If possible, leave an absorbent towel pressed against the spot for 5 to 10 minutes to slowly absorb any residue.

d) Repeat as needed and be patient.

3) Removal Methods

a) Pretest all solutions in an inconspicuous area by applying a few drops.

b) Hold a white towel against the wet area and count to ten.

c) Examine the towel to determine if there is any colour transfer or change in fabric colour.

d) Apply small amounts of the cleaning solution by pressing or padding the area with the absorbent towelling.

e) Wipe the area down and allow it to dry for at least six hours.

4) Special Tips

a) Scrape, vacuum or brush up any dried powdery residue (i.e. mud, talc, powders, etc.).

b) When using water, detergent or solvent, work from the outer edge of the stain towards the centre to avoid ring marks.

c) If using wet extraction or wet/dry vacuum, use overlapping strokes to avoid cleaning marks.

d) Do not over wet or over use cleaning solutions.

e) Contact professional cleaner to remove stains.

B. Cleaning Leather Upholstery (Post Mod 6/2281)

CAUTION DO NOT USE DETERGENTS, CITRUS CLEANERS OR SOLVENTS FOR CLEANING LEATHER.

1) Clean leather covers with commercial saddle soap.

C. Cleaning Fabric Upholstery (Post Mod 6/2281)

1) External surfaces and upholstery should be periodically checked and cleaned. Carefully follow instructions of cleaning product. The normal cleaning method for seat covers is to remove them from the seat and commercially dry clean them with perchlorethane (refer to the Manufacturer's Manual).

Note Prior to dry cleaning, mate hook attachment with opposing piece of pile.

Note Under normal conditions and controlled dry cleaning processes, cover assemblies hold their flammability resistance up to five cleaning cycles. This is not a definite limit since many factors can shorten or extend the flammability life of the cover assembly.

Note Use only nonionic detergents and turn covers inside out if laundering upholstery.

D. Cleaning Sheepskin Covers (S.O.O. 6268)

The sheepskin seat covers are constructed of both sheepskin and Douglass Leather. Each area must be cleaned in accordance with the following manufacturers recommendations.

CAUTION DO NOT MACHINE WASH COVERS UNDER ANY CIRCUMSTANCES.

1) Sheepskin

Basic cleaning should require only brushing and vacuuming. Severe heat can damage sheepskin, resulting in shrinking and hardening of pelts.

Note Do not use alkaline products to clean sheepskin.

a) For mild cleaning:

1 Sponge clean with water and a mild detergent.

2 Comb the wool while wet and air dry skins away from artificial or excessive heat.

3 Skins may crimp after washing. If a straight hair appearance is preferred, brush fleece with a pet brush.

b) For deeper cleaning:

1 Hand scrub with warm water not exceeding 110°F (90°C).

2 Use a small amount of water for each area.

Note Do not soak the covers.

3 Use only pure, mild soap.

Note Do not use Woolite.

4 Comb the wool while wet and air dry skins away from artificial or excessive heat.

5 Skins may crimp after washing. If a straight hair appearance is preferred, brush fleece with a pet brush.

2) Douglass Leather

Leather is resistant to soil and moisture. Basic care should involve no more than regular dusting. For topical spot cleaning, Leather Cleaner Wipes are available from the manufacturer.

Douglass Leather Cleaning Products:

- Leather Cleaner Wipes – A simple, fast, effective way to remove topical soil, these are excellent for spot cleaning. Available from the manufacturer.
- D.I.P. Stick – A powerful and concentrated cleaner specifically for ink or lipstick stain removal. The D.I.P. Stick is compact and easy to use.

Note Do not use detergents, saddle soap, oils or waxes.

a) Basic cleaning:

1 Use a solution of lukewarm water and a pure, mild soap.

2 Dampen (don't wet) a soft cloth or sponge with solution and apply in circular motions.

3 Wipe dry with a soft, clean cloth.

4 For ink or lipstick stain removal, use Douglass D.I.P. Stick.

E. Cleaning Stretchers (S.O.O. 6208)

1) Support Assemblies and Stretcher Frame

a) Remove dirt with a dry, non-abrasive hard-bristled brush.

b) Wipe with a moist towel.

Note Do not immerse in water.

c) Dry thoroughly before storage or use.

2) Stretcher Fabric

a) Clean fabric with warm water and mild commercial soap.

CAUTION **DO NOT USE BLEACH OR HARSH CHEMICALS.**

b) Dry thoroughly before storage or use.

7. Cleaning the Display Screens and Bezel Buttons

CAUTION **DO NOT USE PAPER MATERIALS TO CLEAN THE SCREEN, THIS MAY CAUSE DAMAGE TO THE SCREEN.**

CARE MUST BE TAKEN WHEN CLEANING SCREEN AND BEZEL BUTTONS, DO NOT PUSH ON SCREEN OR BEZEL BUTTONS, THIS MAY CAUSE DAMAGE.

Note Remove all jewelry before cleaning screen, this may cause scratches to display screen.

A. Cleaning the Display Screens

Required Materials and Equipment:

- Silk cloth or brush
- Precision wipe
- Substrate cleaner
- Isopropyl alcohol

1) Ensure the aircraft electrical power is OFF (refer to 24-00-00, Electrical Power – General Data).

2) To remove finger prints and non grease type marks, breath on marked area and gently wipe area with clean cloth.

3) To remove oil or grease marks:

a) Dampen a precision wipe with substrate cleaner.

b) Gently wipe screen until marked area is clean.

c) Repeat if required.

B. Cleaning the Bezel Buttons

1) Ensure the aircraft electrical power is OFF (refer to 24-00-00, Electrical Power – General Data).

2) Use a clean non-abrasive lint-free cotton cloth dampened with a multi-purpose detergent **containing no alcohol**.

3) Gently wipe bezel button surface until clean.

4) Repeat if required.

8. Cleaning Fuel Gallery Electrical Connections

A. Ensure the aircraft electrical power is OFF. (Refer to 24-00-00, Electrical Power – General Data).

B. Clean the electrical connectors and surrounding area with Isopropyl alcohol, using a brush H–B–681 or toothbrush A–A–59.

C. Remove extra solvent and residue with cleaning cloth CCC–C–46 (Type I, Class 4).

9. Cleaning STA 332 Bulkhead Cargo Net

Required Materials and Equipment:

- Mild Detergent or Dish Soap
- Soft Scrub Brush

A. Cleaning Procedure

CAUTION DO NOT USE BLEACH OR HARSH CHEMICALS.

1) Remove cargo netting from aircraft.

2) Wash cargo net with mild detergent and warm water.

3) Gently scrub the cargo net as required to remove dirt/stains.

4) Rinse well with fresh warm water.

5) Allow to air dry thoroughly before storage or use.