Lubrication – General Data

1. General

Lubrication points, methods, and frequency of application are given in Lubrication Diagram, Figure 1. Extensive use of sealed bearings and dry-film lubricant, applied during manufacture, keeps the need for external lubrication to a minimum. Consequently, daily and intermediate lubrication is unnecessary, and periodic application is indicated by a triangle, the frequency of which is denoted by the figure on the block at the base of the triangle. The specification and equivalent types of lubrication recommended for use at each point is given in Table 1 — Lubricants, and is used in conjunction with the frequency figure in Figure 1. Before applying lubricant, wipe off any dirt and moisture from the point with a clean, lint-free cloth, lightly moistened with dry cleaning solvent. Avoid excessive use of lubricant when applying by hand to prevent spillage. Carefully clean up spillage immediately.

Table 1 Lubricants

SYMBOL	A	B	C	D	E
Type of Lubricant (Note 1)	Multi-purpose Grease (Note 2)	General Purpose Lubricating Oil	Silicone Grease	General Purpose Grease	Hartzell Approved Grease (per label on propeller) (Note 5)
PRODUCTS & SPECIFICATIONS					
NYCO Aviation Products		NYCOLUBE 7870 (MIL–PRF–7870) (–54°C to +121°C) Mineral based oil			NYCO Grease GN 3058 (AMS 3058) (–54°C to +175°C) Synthetic oil based with Lithium (Note 5)
SHELL Aviation Products	AeroShell Grease 7 (MIL–PRF–23827 Type II) (–73°C to +149°C) Clay and synthetic ester oil based (Note 3) AeroShell Grease 22 (MIL–PRF–81322) (–65°C to +204°C) Synthetic hydrocarbon oil base	AeroShell Fluid 3 (MIL–PRF–7870) (–54°C to +121°C) Mineral based oil		AeroShell Grease 22 (MIL–PRF–81322) (–65°C to +204°C) Synthetic hydrocarbon oil base	AeroShell Grease 6 (MIL–PRF–24139) (–40°C to +121°C) Mineral oil based (Note 5)
Other MFG Aviation Products	Exxon Mobil Mobil Aviation Grease SHC 100 (internal spec) (–54°C to +177°C) Synthetic hydrocarbon oil based with Lithium (Note 4)		DOW & NOVAGARD DC4 & G624 (MIL–S–8660 / SAE–AS8660) (–54°C to +204°C)		

Note


1 Do not mix grease from different manufacturers, specifications or types onto the same component. The properties of one grease can decrease the lubrication performance of the other grease. This could possibly cause unsatisfactory lubrication and failure of the component.

2 Greases shown under Symbol A have a synthetic base and as such are not compatible with greases having a mineral base.

3 Do not mix MIL–PRF–23827 Type II greases with MIL–PRF–23827 Type I (soap-based) greases.


4 Do not use Mobilith SHC 100 as this is a consumer grade grease that visually resembles Mobil SHC 100 but is not approved for aviation use.

5 Each propeller shall be greased as per the propeller label. Do not mix NYCO GN 3058 lithium thickened grease with AeroShell 6 mineral oil thickened grease. Mixed grease product has inferior properties and shall cause premature propeller failure. For detailed information on approved grease types, refer to Hartzell Propeller Inc. Manual 202A, Volume 7, Approved Lubricants section.

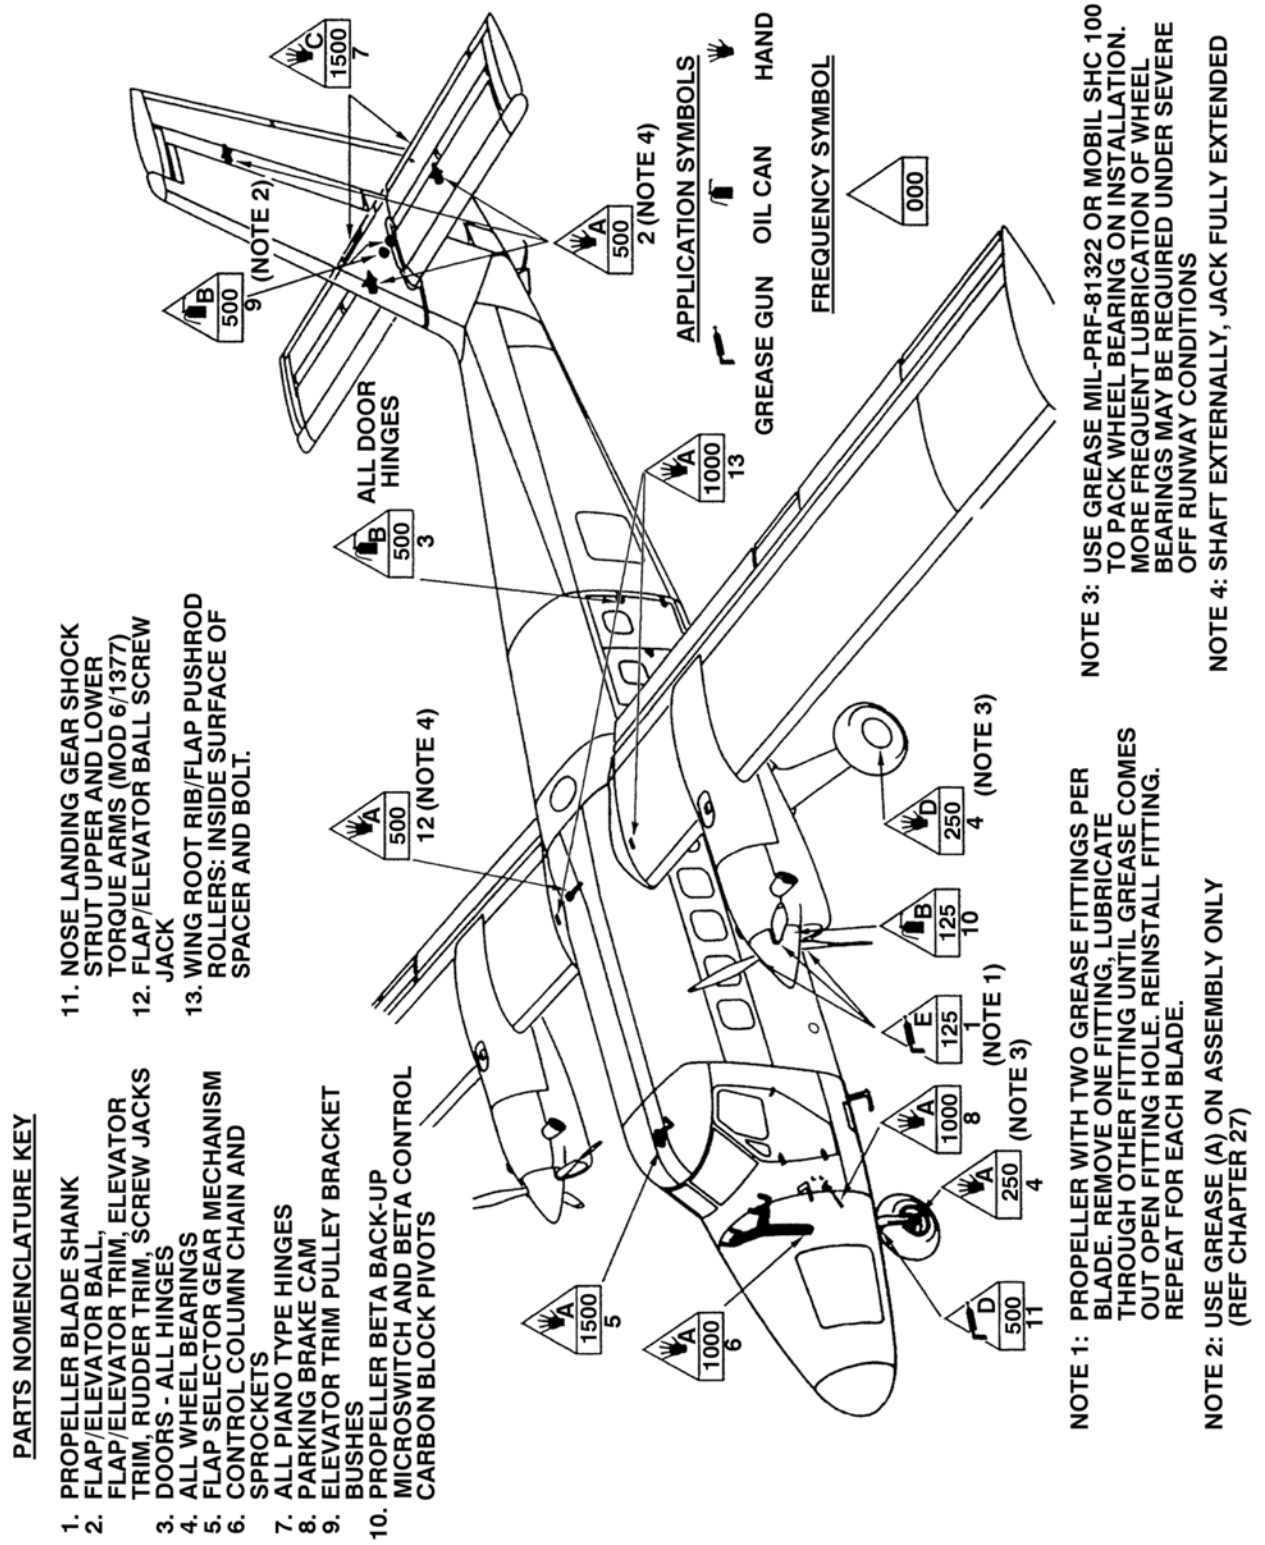


Lubrication Diagram
Figure 1

Print Date: 2025-09-12

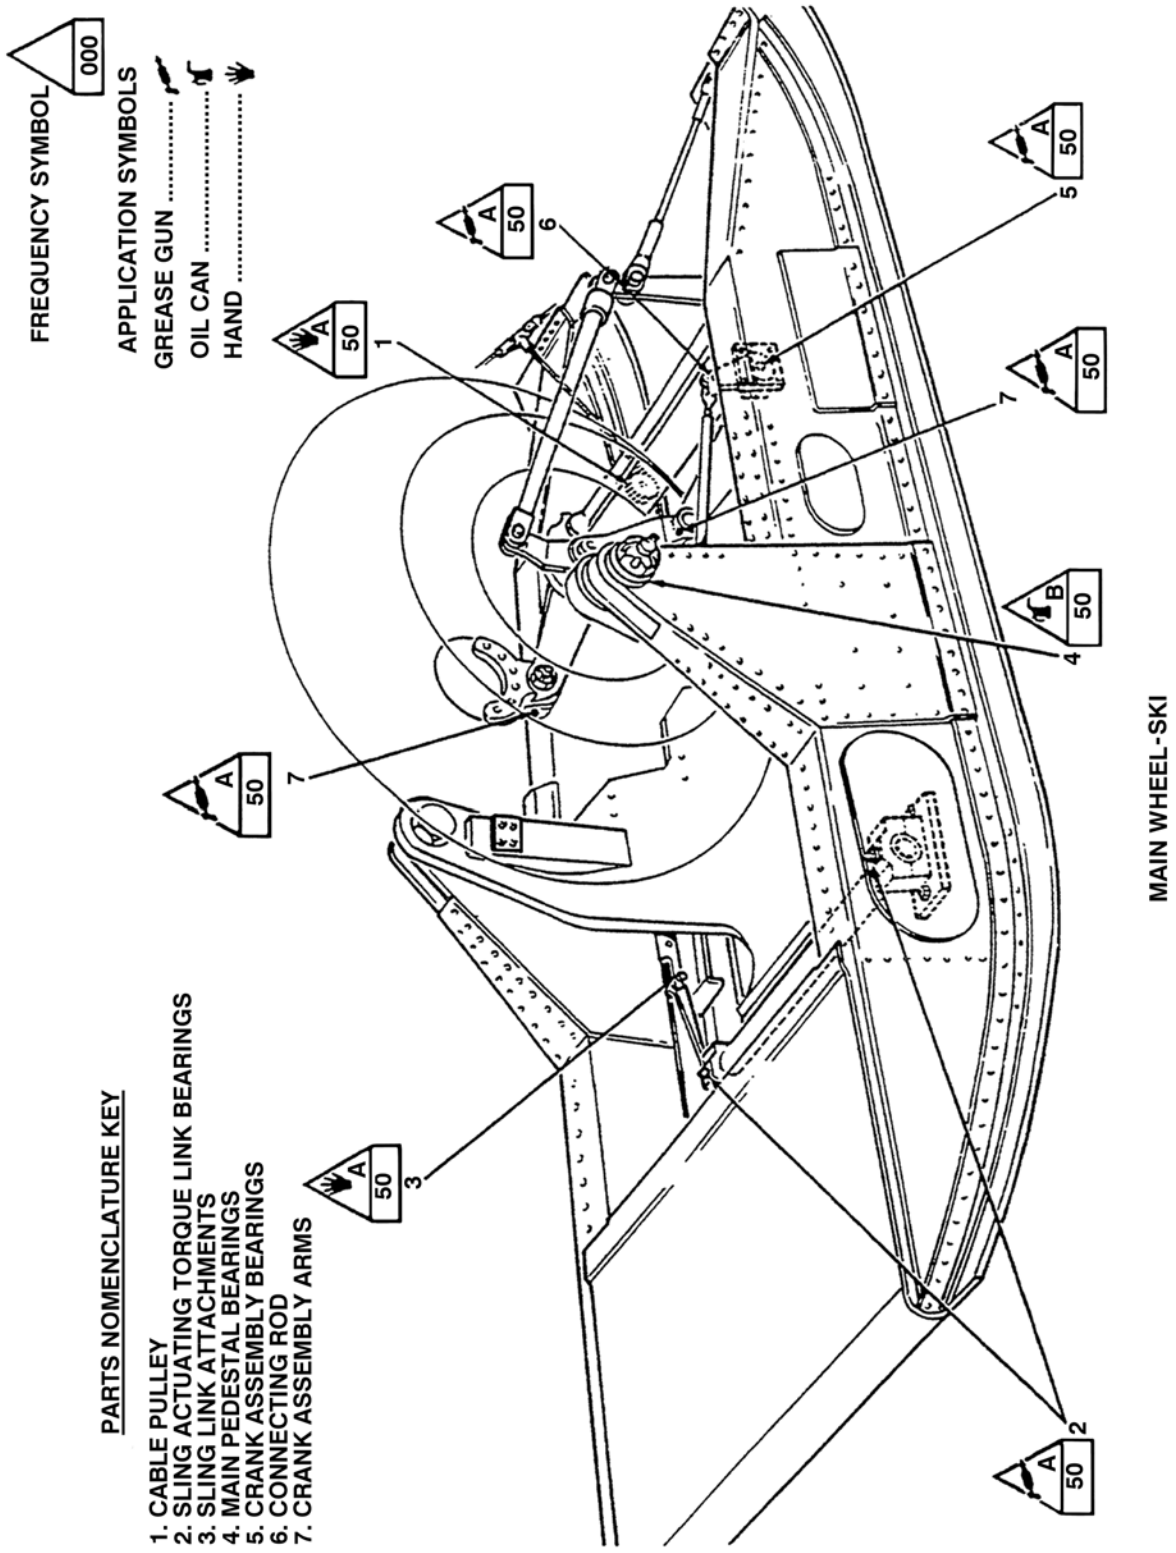

Lubrication Diagram - Wheel-Skis
Figure 2 (Sheet 1 of 2)

Print Date: 2025-09-12

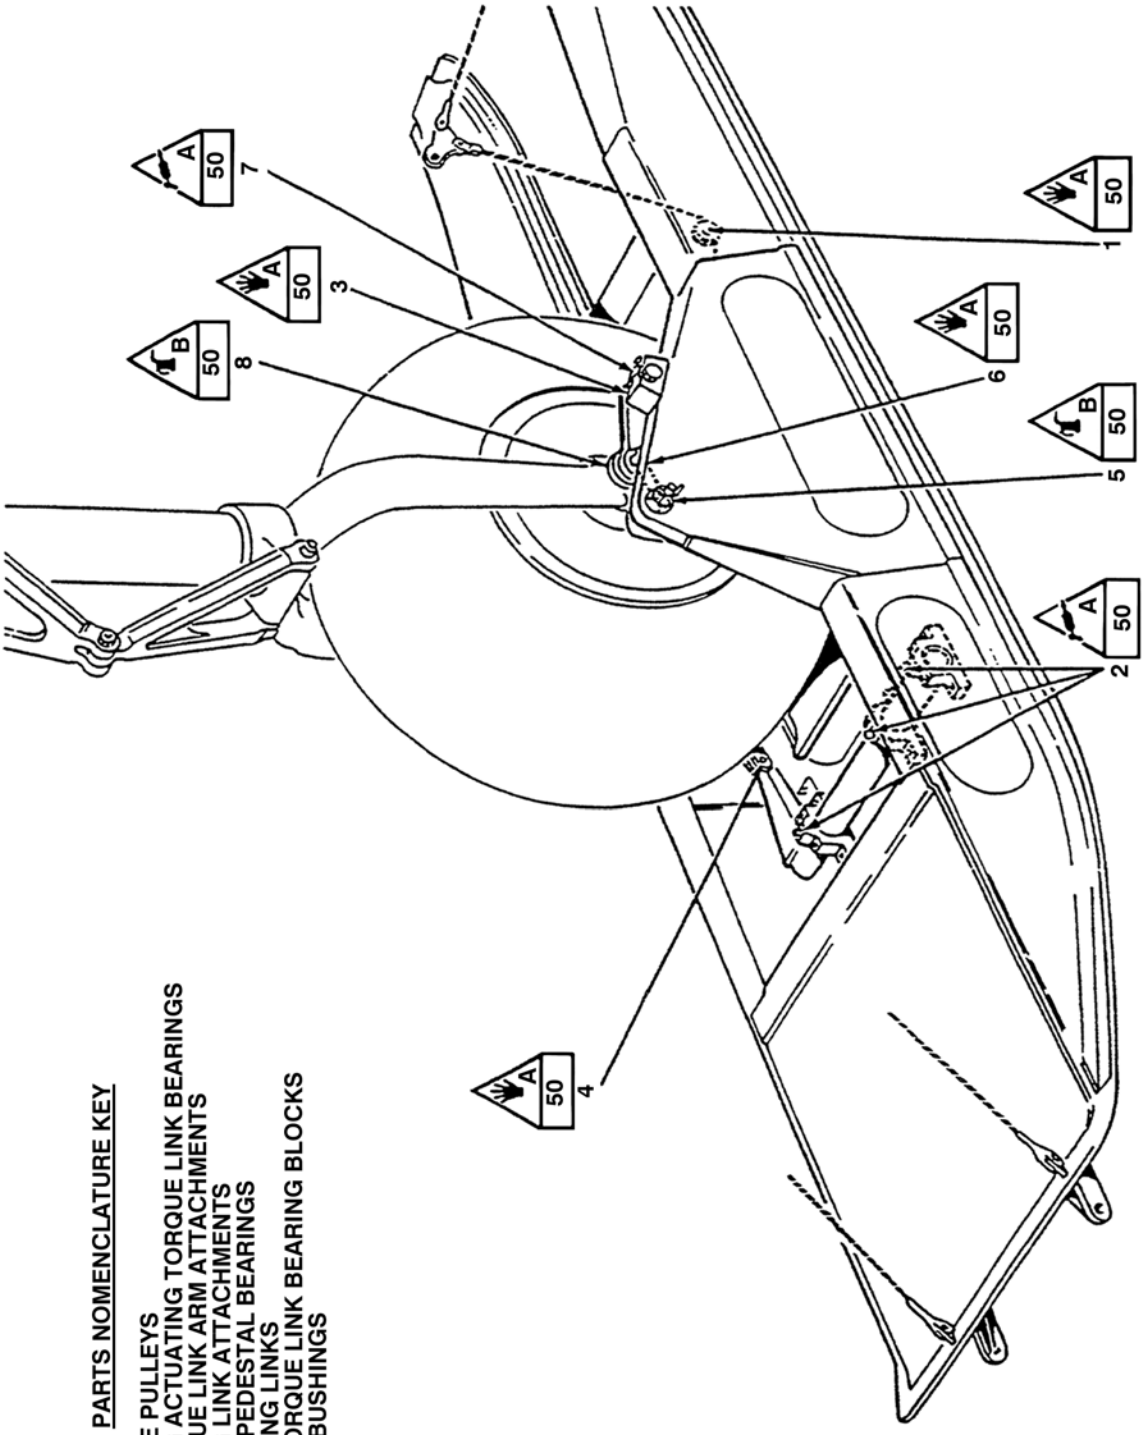

PARTS NOMENCLATURE KEY

1. CABLE PULLEYS
2. SLING ACTUATING TORQUE LINK BEARINGS
3. TORQUE LINK ARM ATTACHMENTS
4. SLING LINK ATTACHMENTS
5. MAIN PEDESTAL BEARINGS
6. LIMITING LINKS
7. SKI TORQUE LINK BEARING BLOCKS
8. AXLE BUSHINGS

NOSE WHEEL-SKI

Lubrication Diagram - Wheel-Skis
Figure 2 (Sheet 2 of 2)

Print Date: 2025-09-12

This Page Intentionally Left Blank