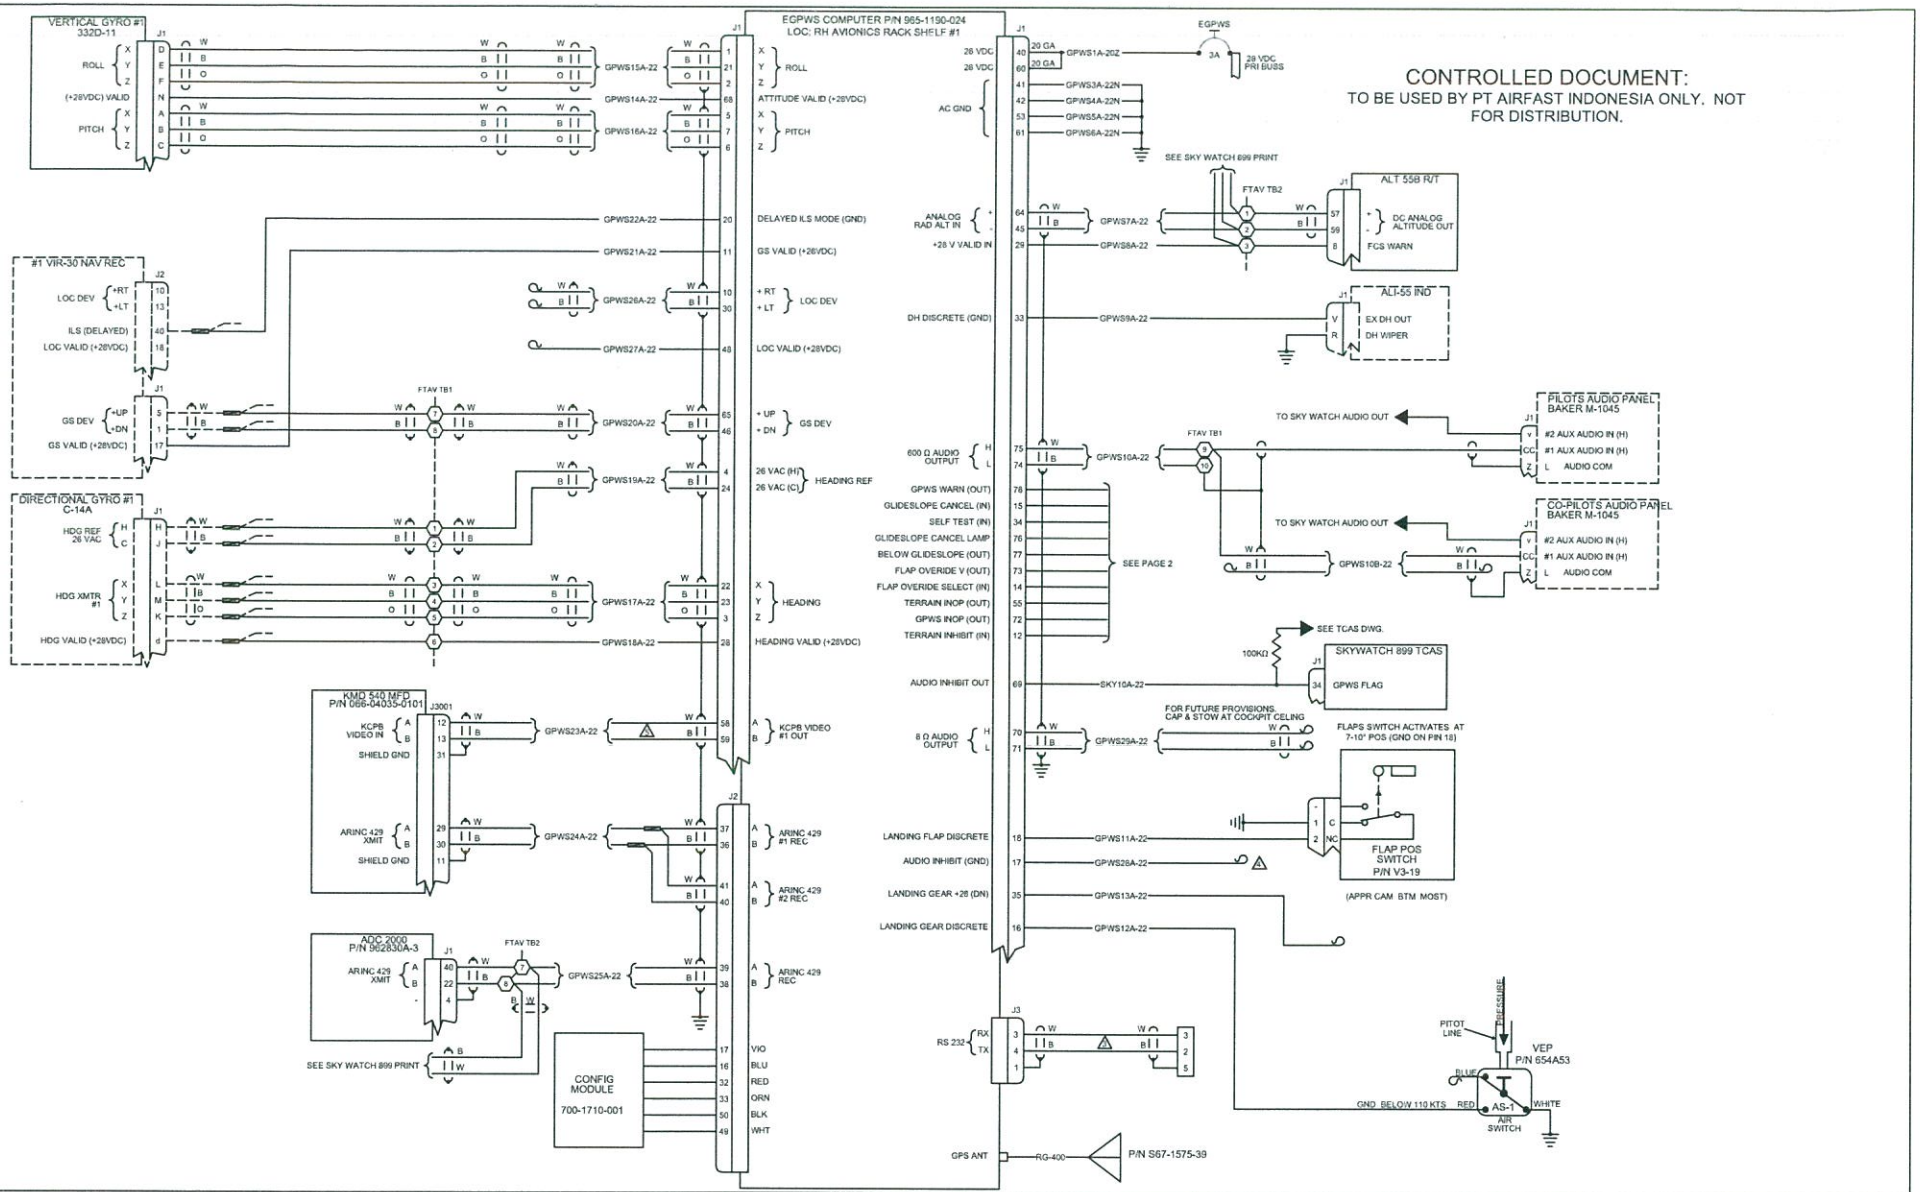


CONTROLLED DOCUMENT:
TO BE USED BY PT AIRFAST INDONESIA ONLY. NOT FOR DISTRIBUTION.

NOTES:


1. DASHED LINES DENOTES EXISTING EQUIPMENT AND WIRING.
2. ALL SINGLE WIRE IS MIL-W-22759/16-22 AND ALL SHIELDED WIRE IS MIL-DTL-27500-22TG2T14 OR 22TG3T14 UNLESS OTHERWISE SPECIFIED.
3. CONFIGURATION HARNESS NOT INSTALLED ON AIRCRAFT, USED ONLY FOR INITIAL SETUP.
4. IF STALL WARNING IS INSTALLED IN AIRCRAFT ROUTE THIS WIRE TO THE STALL WARNING COMPUTER, IF NOT CAP AND STOW NEAR EGPWS COMPUTER.
5. USE M17/176-00002 SPECIAL CABLE.

FIELDTECH AVIONICS & INSTRUMENTS, INC.

DHC-6 TWIN OTTER (SN 689)

MARK VI EGPWS INTERFACE

DRAWN BY: MIKE KEITH	CHECKED BY: Chris K	DWG NO. 600-118233-001	REV:
DATE: 4/18/10	APPROVED BY: Tom Psenak	SHEET 1 OF 2	

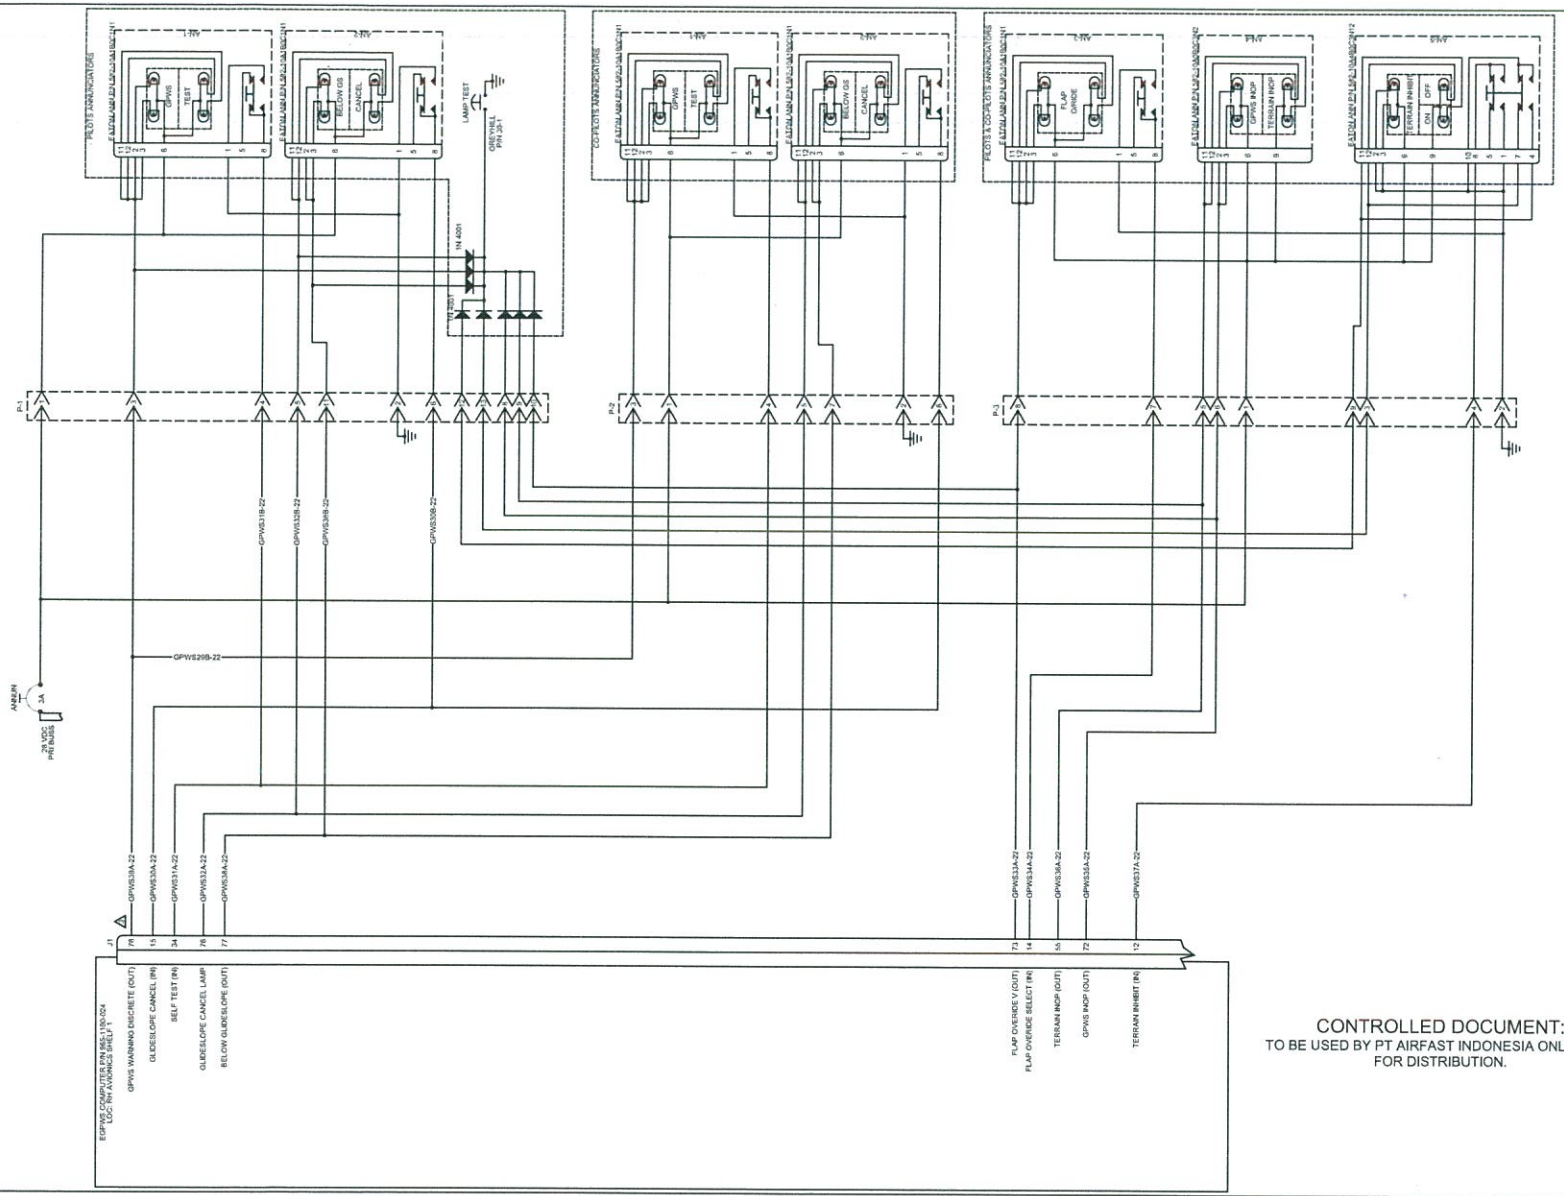

CONTROLLED DOCUMENT:
TO BE USED BY PT AIRFAST INDONESIA ONLY. NOT FOR DISTRIBUTION.

NOTES:

1. DASHED LINES DENOTES EXISTING EQUIPMENT AND WIRING.
2. ALL SINGLE WIRE IS MIL-W-22759/16-22 AND ALL SHIELDED WIRE IS MIL-DTL-27500-22TG2T14 OR 22TG3T14 UNLESS OTHERWISE SPECIFIED.
3. 15 PIN D-SUB DISCONNECT WITH 2 FOOT PIGTAIL AT ANNUNICATOR END.

FIELDTECH AVIONICS & INSTRUMENTS, INC.


DHC-6 TWIN OTTER (SN 689)

MARK VI EGPWS ANNUNICATORS

DRAWN BY: MIKE KEITH	Checked By:: Chris K	DWG NO. 600-118233-001	REV:
DATE: 4/18/10	APPROVED BY: Tom Peenak	SHEET 2 OF 2	

CONTROLLED DOCUMENT:

TO BE USED BY PT AIRFAST INDONESIA ONLY. NOT FOR DISTRIBUTION.

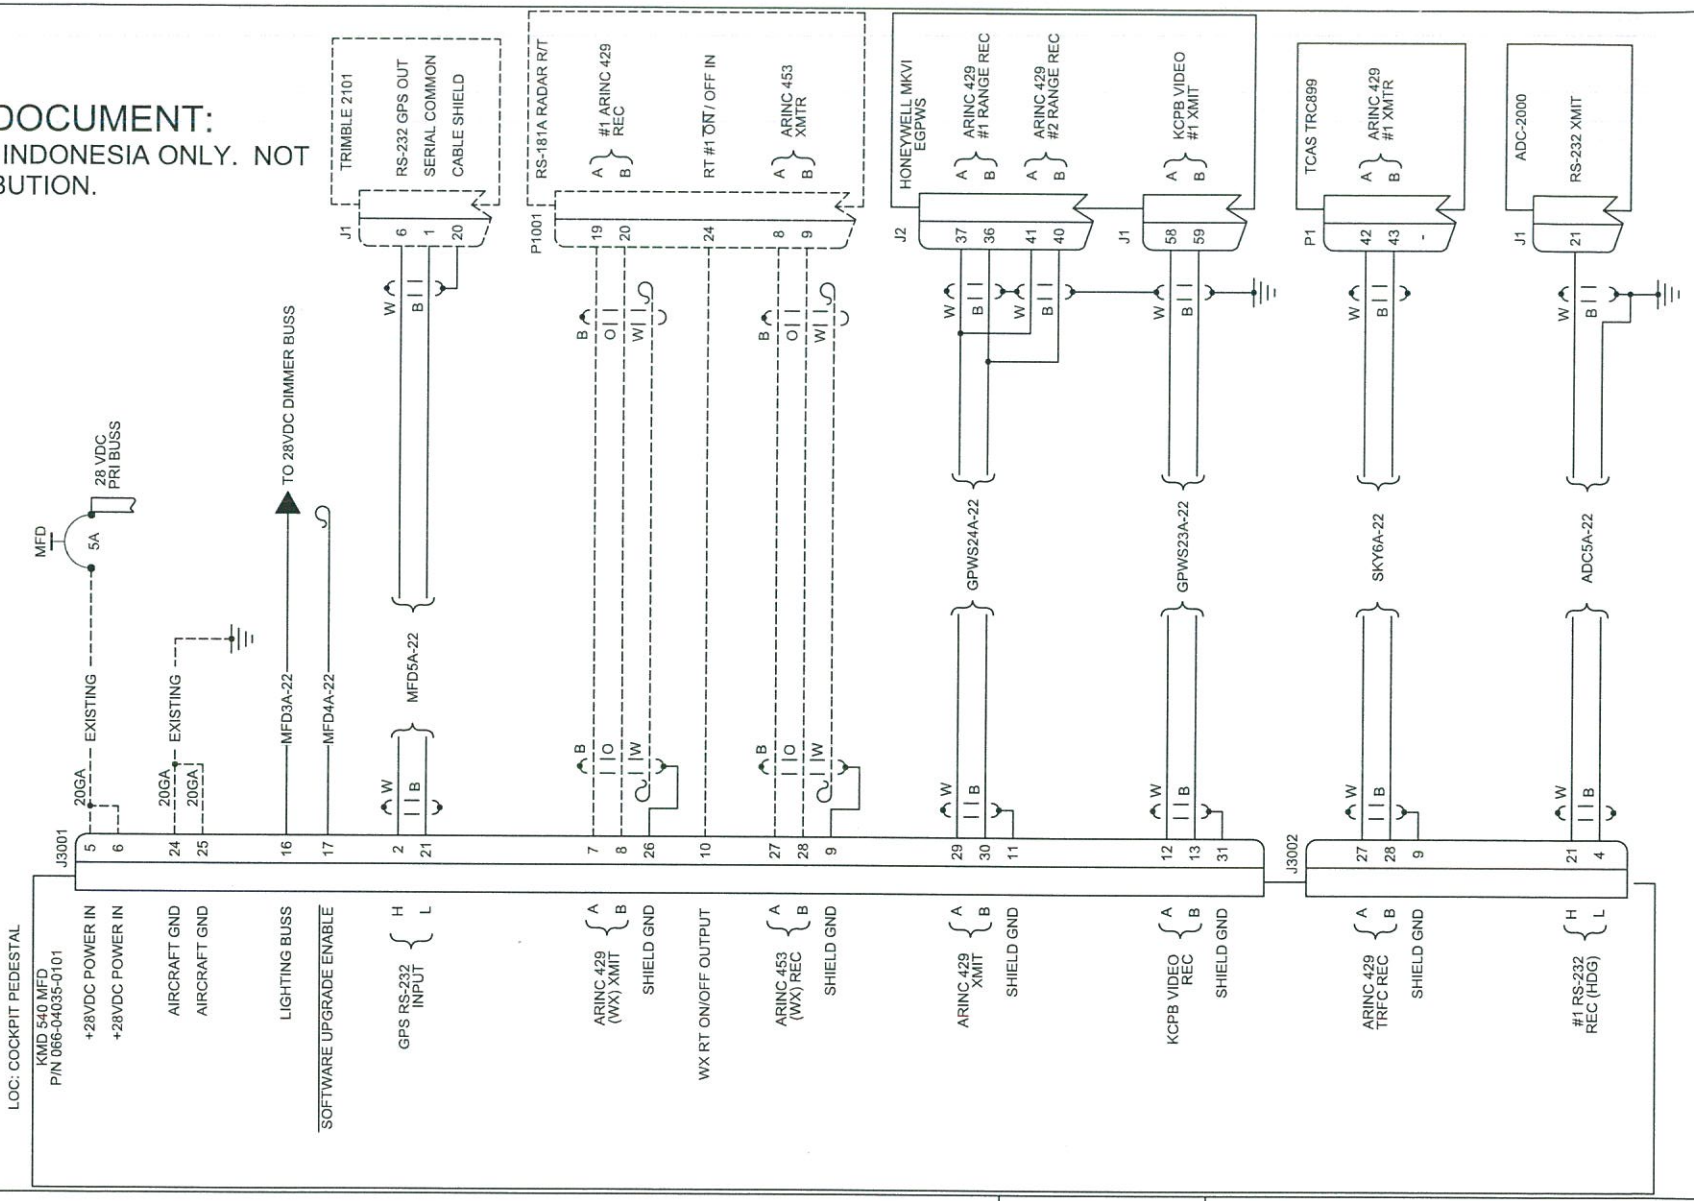

NOTES:


1. DASHED LINES DENOTES EXISTING EQUIPMENT AND WIRING.
2. ALL SINGLE WIRE IS MIL-W-22759/16-22 AND ALL SHIELDED WIRE IS MIL-DTL-27500-22TG2T14 OR 22TG3T14 UNLESS OTHERWISE SPECIFIED.

FIELDTECH AVIONICS & INSTRUMENTS, INC.

DHC-6 TWIN OTTER (SN 689)

KMD-540 MFD INTERFACE

DRAWN BY: MIKE KEITH	Checked By: Chris K	DWG NO. 600-118233-003	
DATE: 4/18/10	APPROVED BY: Tom Psenak	SHEET 1 OF1	

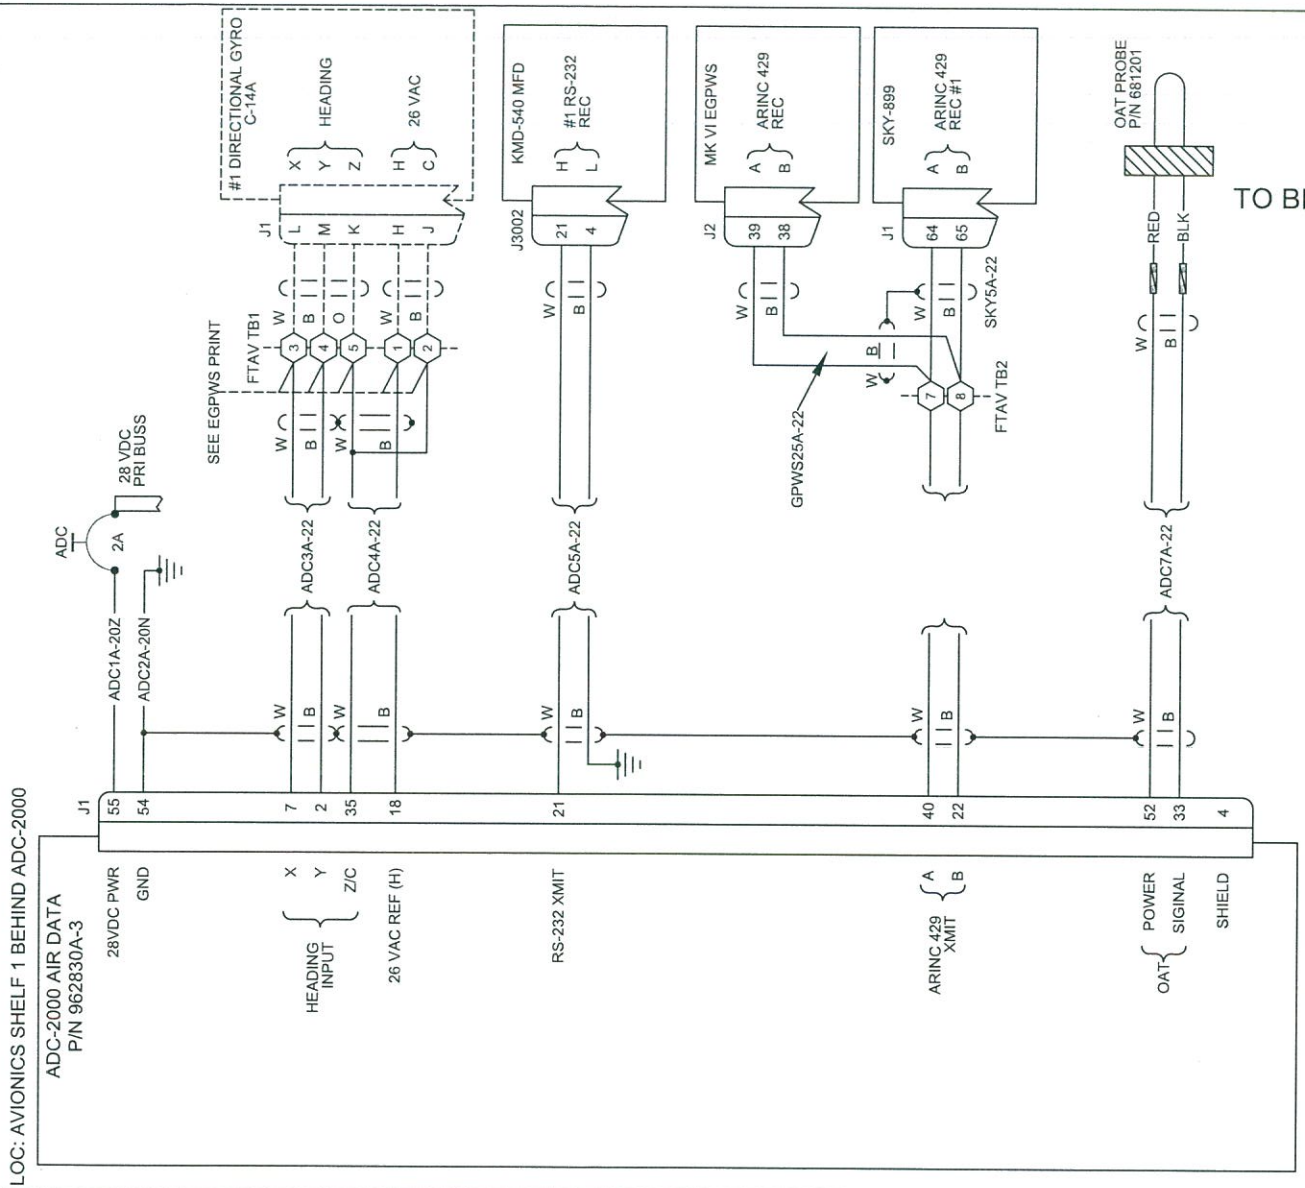

CONTROLLED DOCUMENT:


TO BE USED BY PT AIRFAST INDONESIA ONLY. NOT FOR DISTRIBUTION.

NOTES:

1. DASHED LINES DENOTES EXISTING EQUIPMENT AND WIRING.
2. ALL SINGLE WIRE IS MIL-W-22759/16-22 AND ALL SHIELDED WIRE IS MIL-DTL-27500-22TG2T14 OR 22TG3T14 UNLESS OTHERWISE SPECIFIED.
3. USE SHADIN CONFIGURATION PROGRAM (ADSETUPF) TO SET GPS OUTPUT TO BENDIX C.
4. SET ARINC SWITCH ON ADC COMPUTER TO "B".

FIELDTECH AVIONICS & INSTRUMENTS, INC.

DHC-6 TWIN OTTER (SN 689)			
ADC-2000 AIR DATA COMPUTER			
DRAWN BY: MIKE KEITH	Checked By: Chris K	DWG NO. 600-118233-004	A
DATE: 4/18/10	APPROVED BY: Tom Psenak	SHEET 1 OF1	

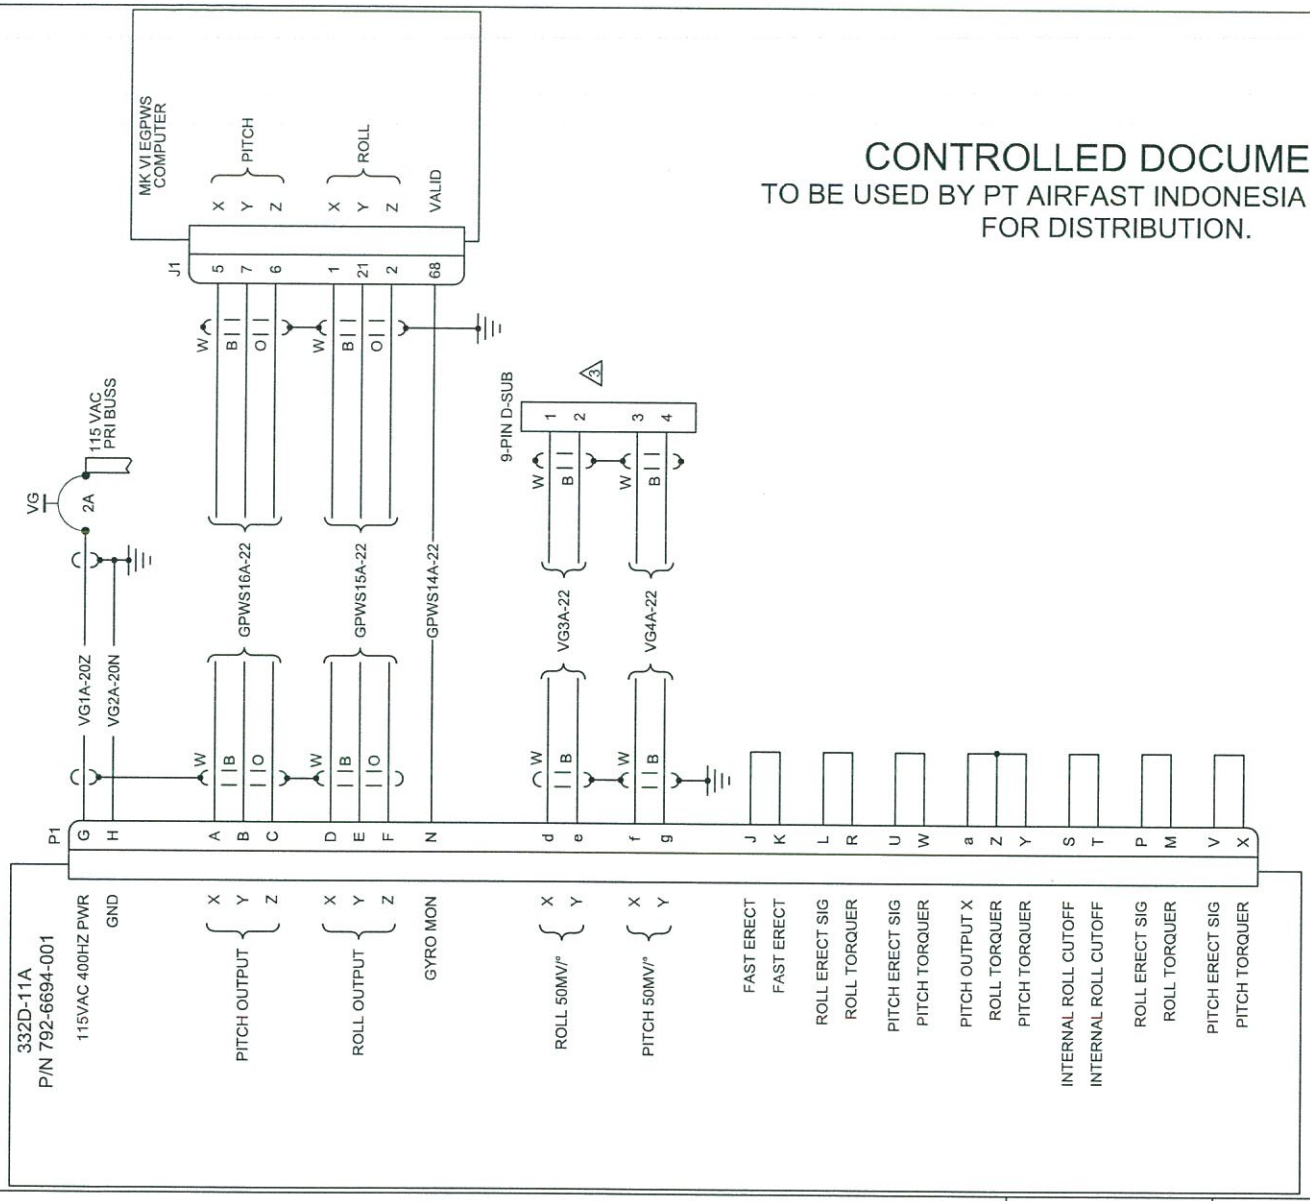

CONTROLLED DOCUMENT:

TO BE USED BY PT AIRFAST INDONESIA ONLY. NOT FOR DISTRIBUTION.

NOTES:


1. DASHED LINES DENOTES EXISTING EQUIPMENT AND WIRING.
2. ALL SINGLE WIRE IS MIL-W-22759/16-22 AND ALL SHIELDED WIRE IS MIL-DTL-27500-22TG2T14 OR 22TG3T14 UNLESS OTHERWISE SPECIFIED.
3. STOW PLUG NEAR VG AND MARK RADAR STAB.

FIELDTECH AVIONICS & INSTRUMENTS, INC.

DHC-6 TWIN OTTER (SN 689)

332D-11A VG INTERFACE

DRAWN BY: MIKE KEITH	Checked BY: Chris K	DWG NO. 600-118233-005	REV:
DATE: 4/18/10	APPROVED BY: Tom Psenak	SHEET 1 OF1	

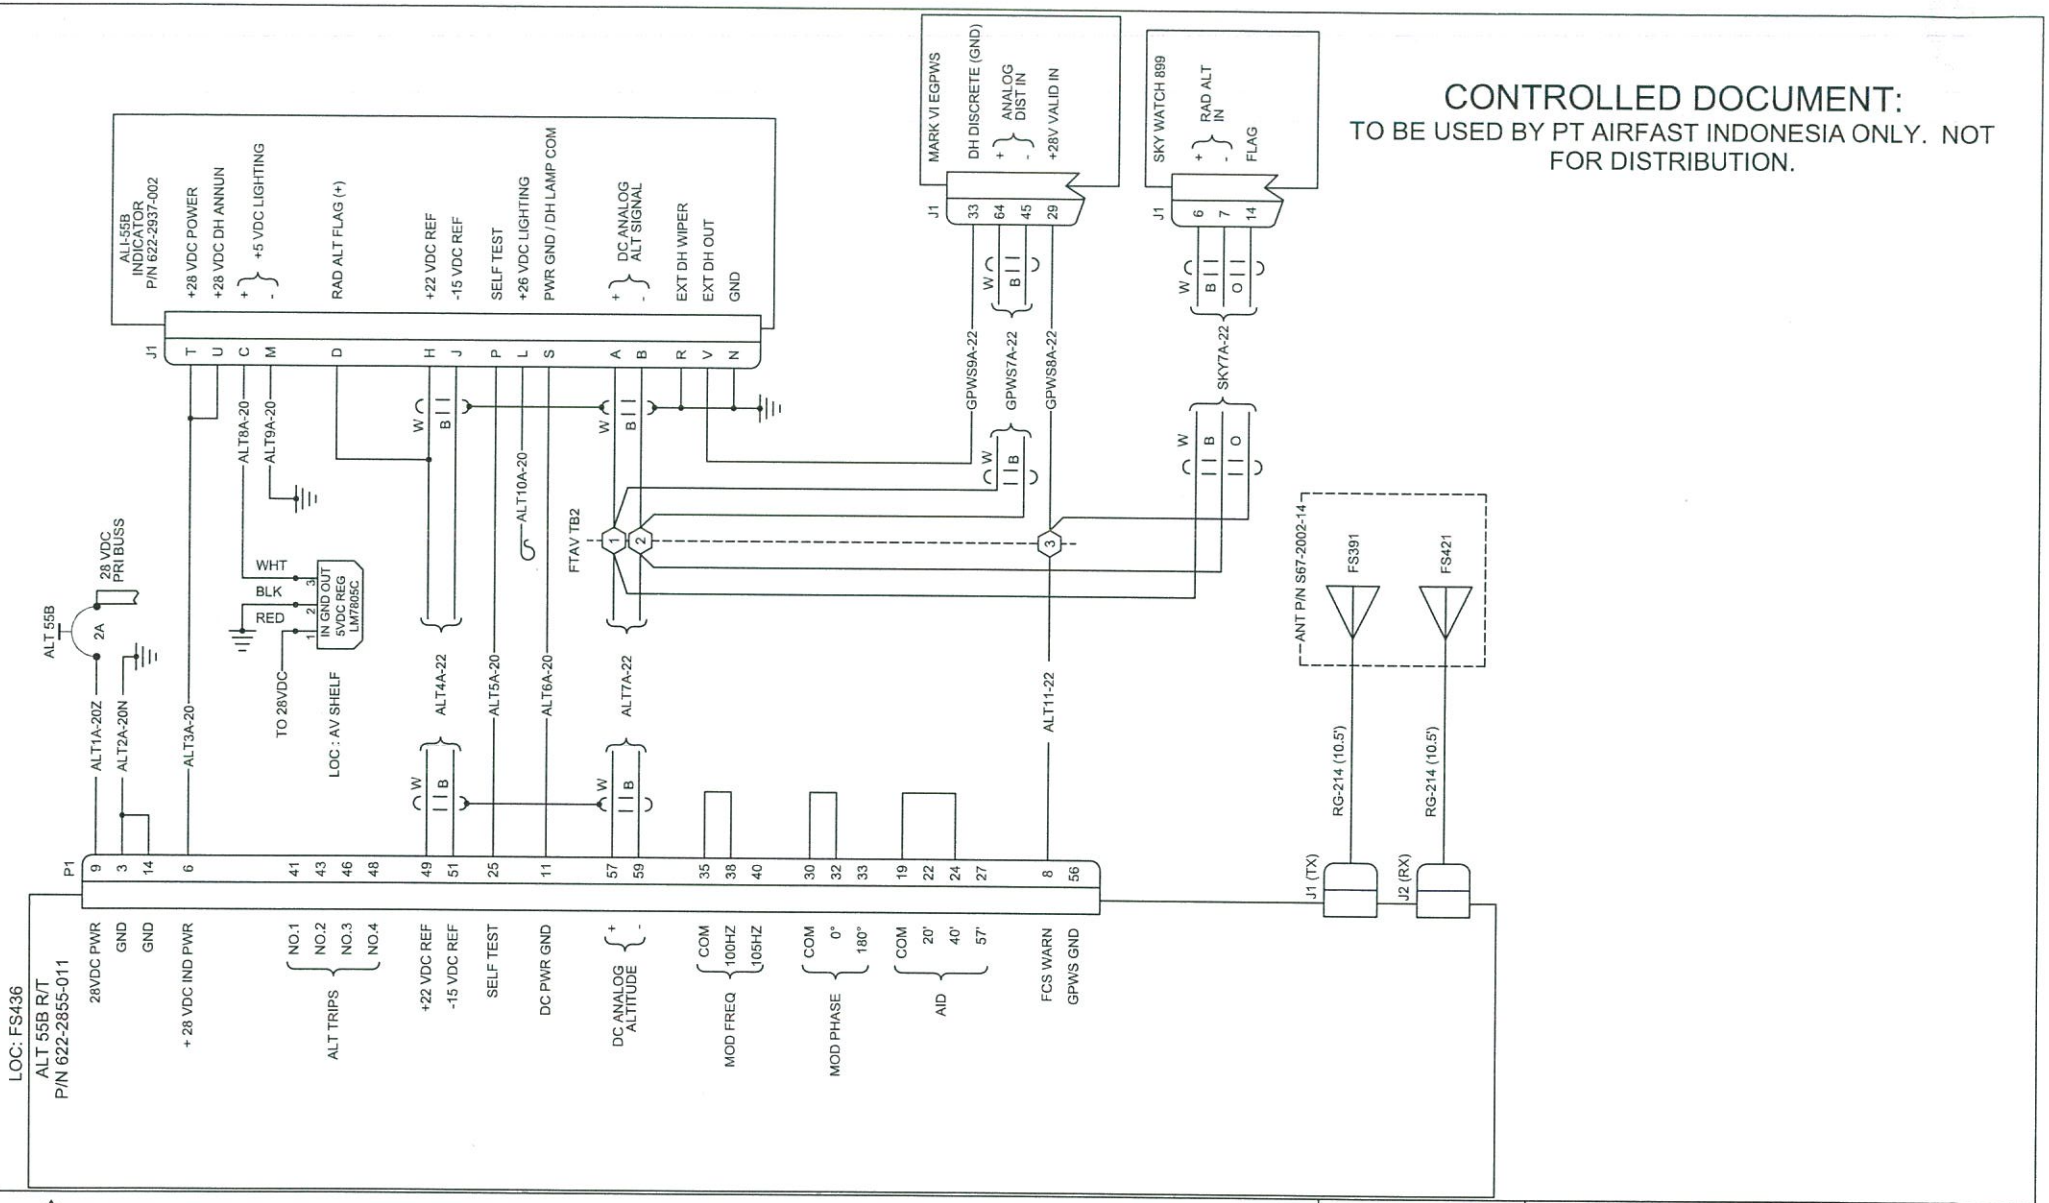

NOTES:

1. DASHED LINES DENOTES EXISTING EQUIPMENT AND WIRING.
2. ALL SINGLE WIRE IS MIL-W-22759/16-22 AND ALL SHIELDED WIRE IS MIL-DTL-27500-22TG2T14 OR 22TG3T14 UNLESS OTHERWISE SPECIFIED.

FIELDTECH AVIONICS & INSTRUMENTS, INC.

DHC-6 TWIN OTTER (SN 689)

ALT-55B ALI-55 RAD ALT INTERFACE

DRAWN BY: MIKE KEITH	Checked By: Chris K	DWG NO. 600-118233-006	A
DATE: 4/18/10	APPROVED BY: Tom Psenak	SHEET 1 OF1	