Application of Bonding Jumpers – General data

1. General

This standard specifies the procedures and requirements for a typical installation of bonding hardware.


2. Application of Bonding Jumpers

A. Install the bonding connections as directly as possible without applying strain to the bonding jumpers or welded lugs. Refer to Figure 1.


B. Install bonding jumpers so that the wire does not come into contact with surrounding structure, equipment, fuel pipes or other bonding jumpers. Refer to Figure 2. If contact is unavoidable a CSP 476 bonding jumper complete with insulating sleeve must be used.

C. If possible, locate bonding connections in protected areas in order to avoid contact with electrical wiring and control boxes or inference with moveable components of the aircraft.

D. When installing a loop type clamp on a tubular member, take care not to crimp or indent the tube.

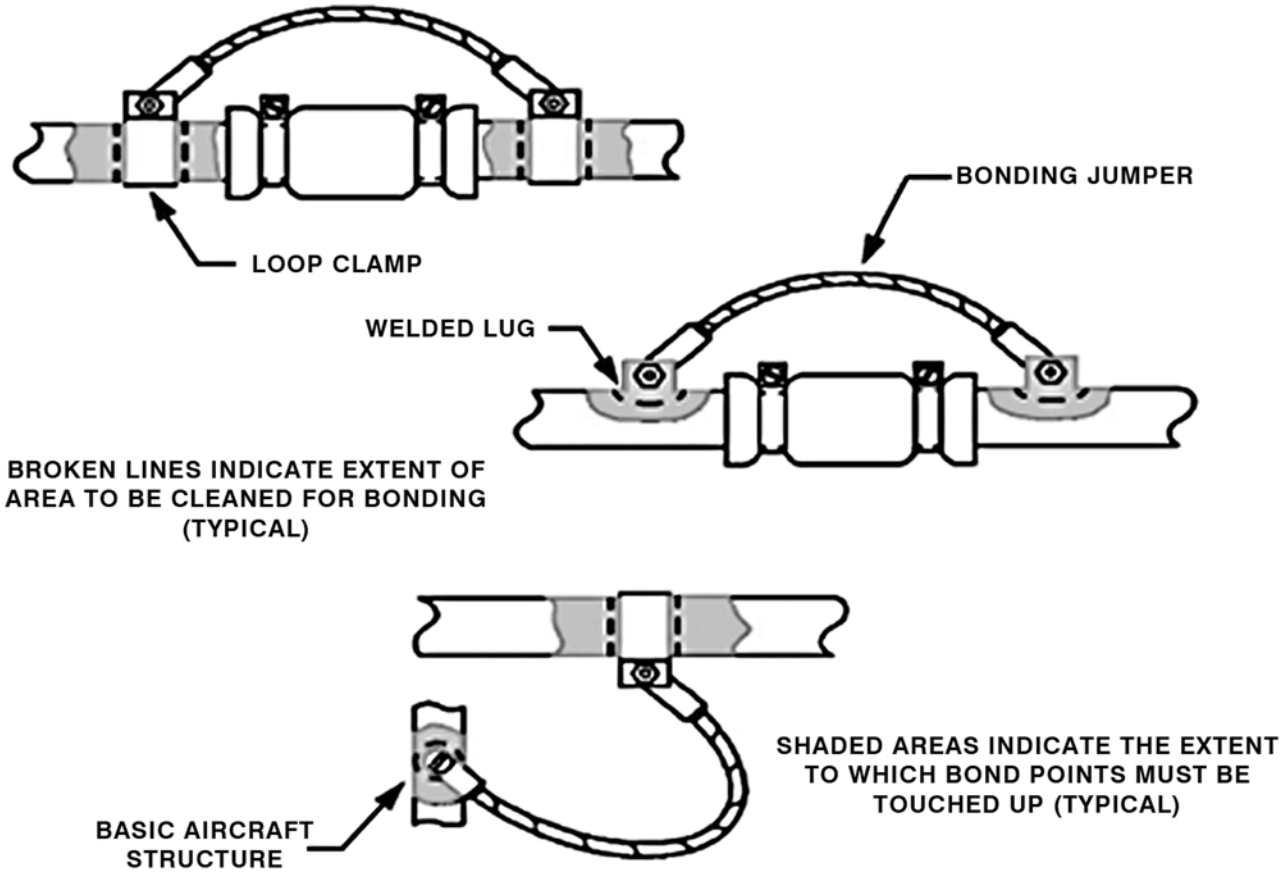

Typical Application of Bonding Jumpers
Figure 1

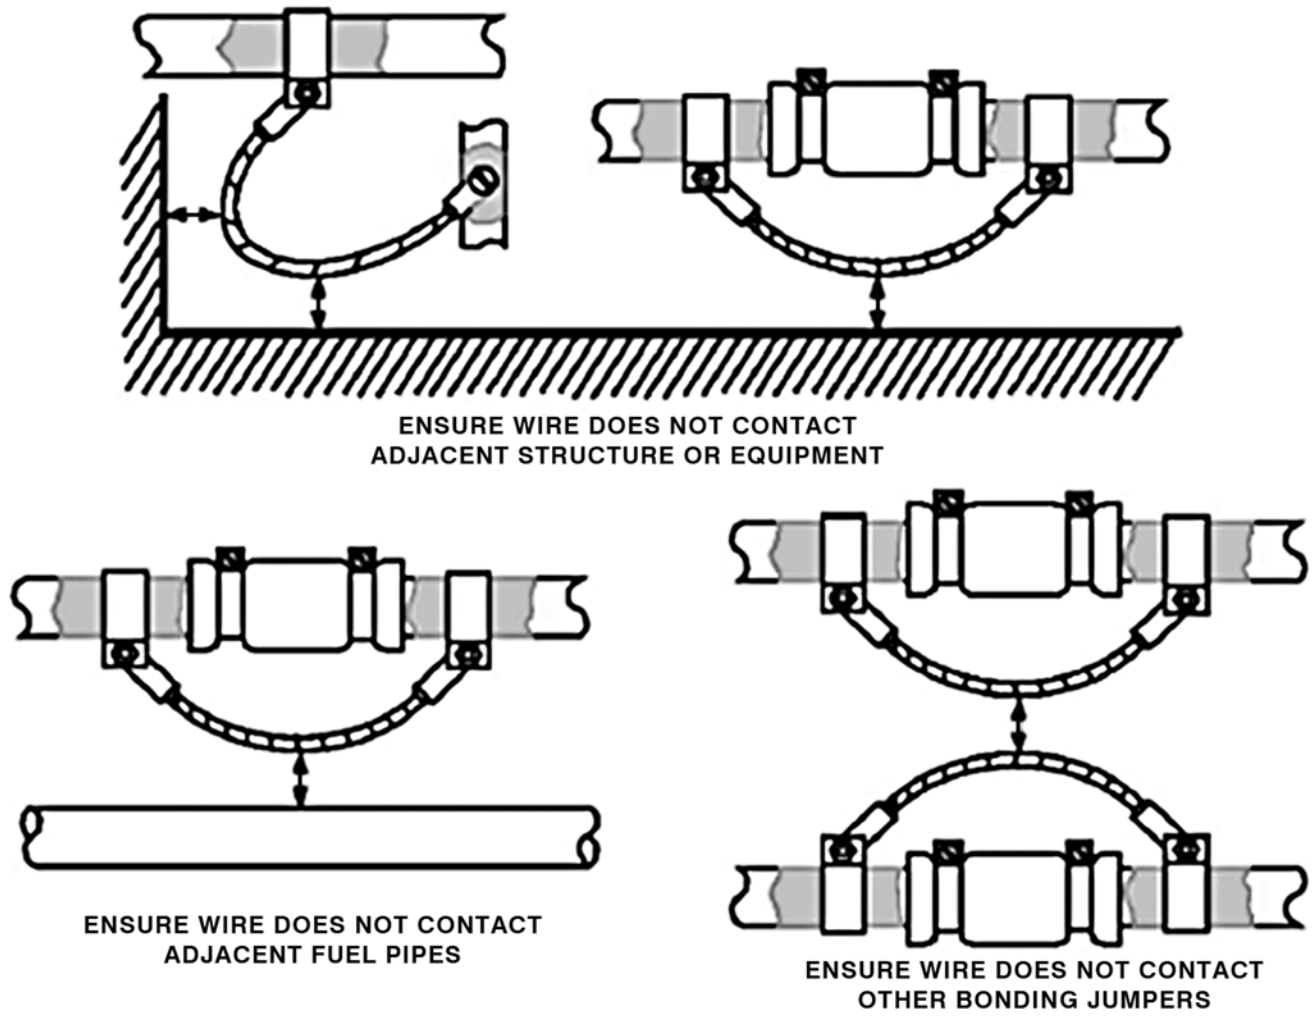

Typical Bonding Jumper Clearance Requirements
Figure 2