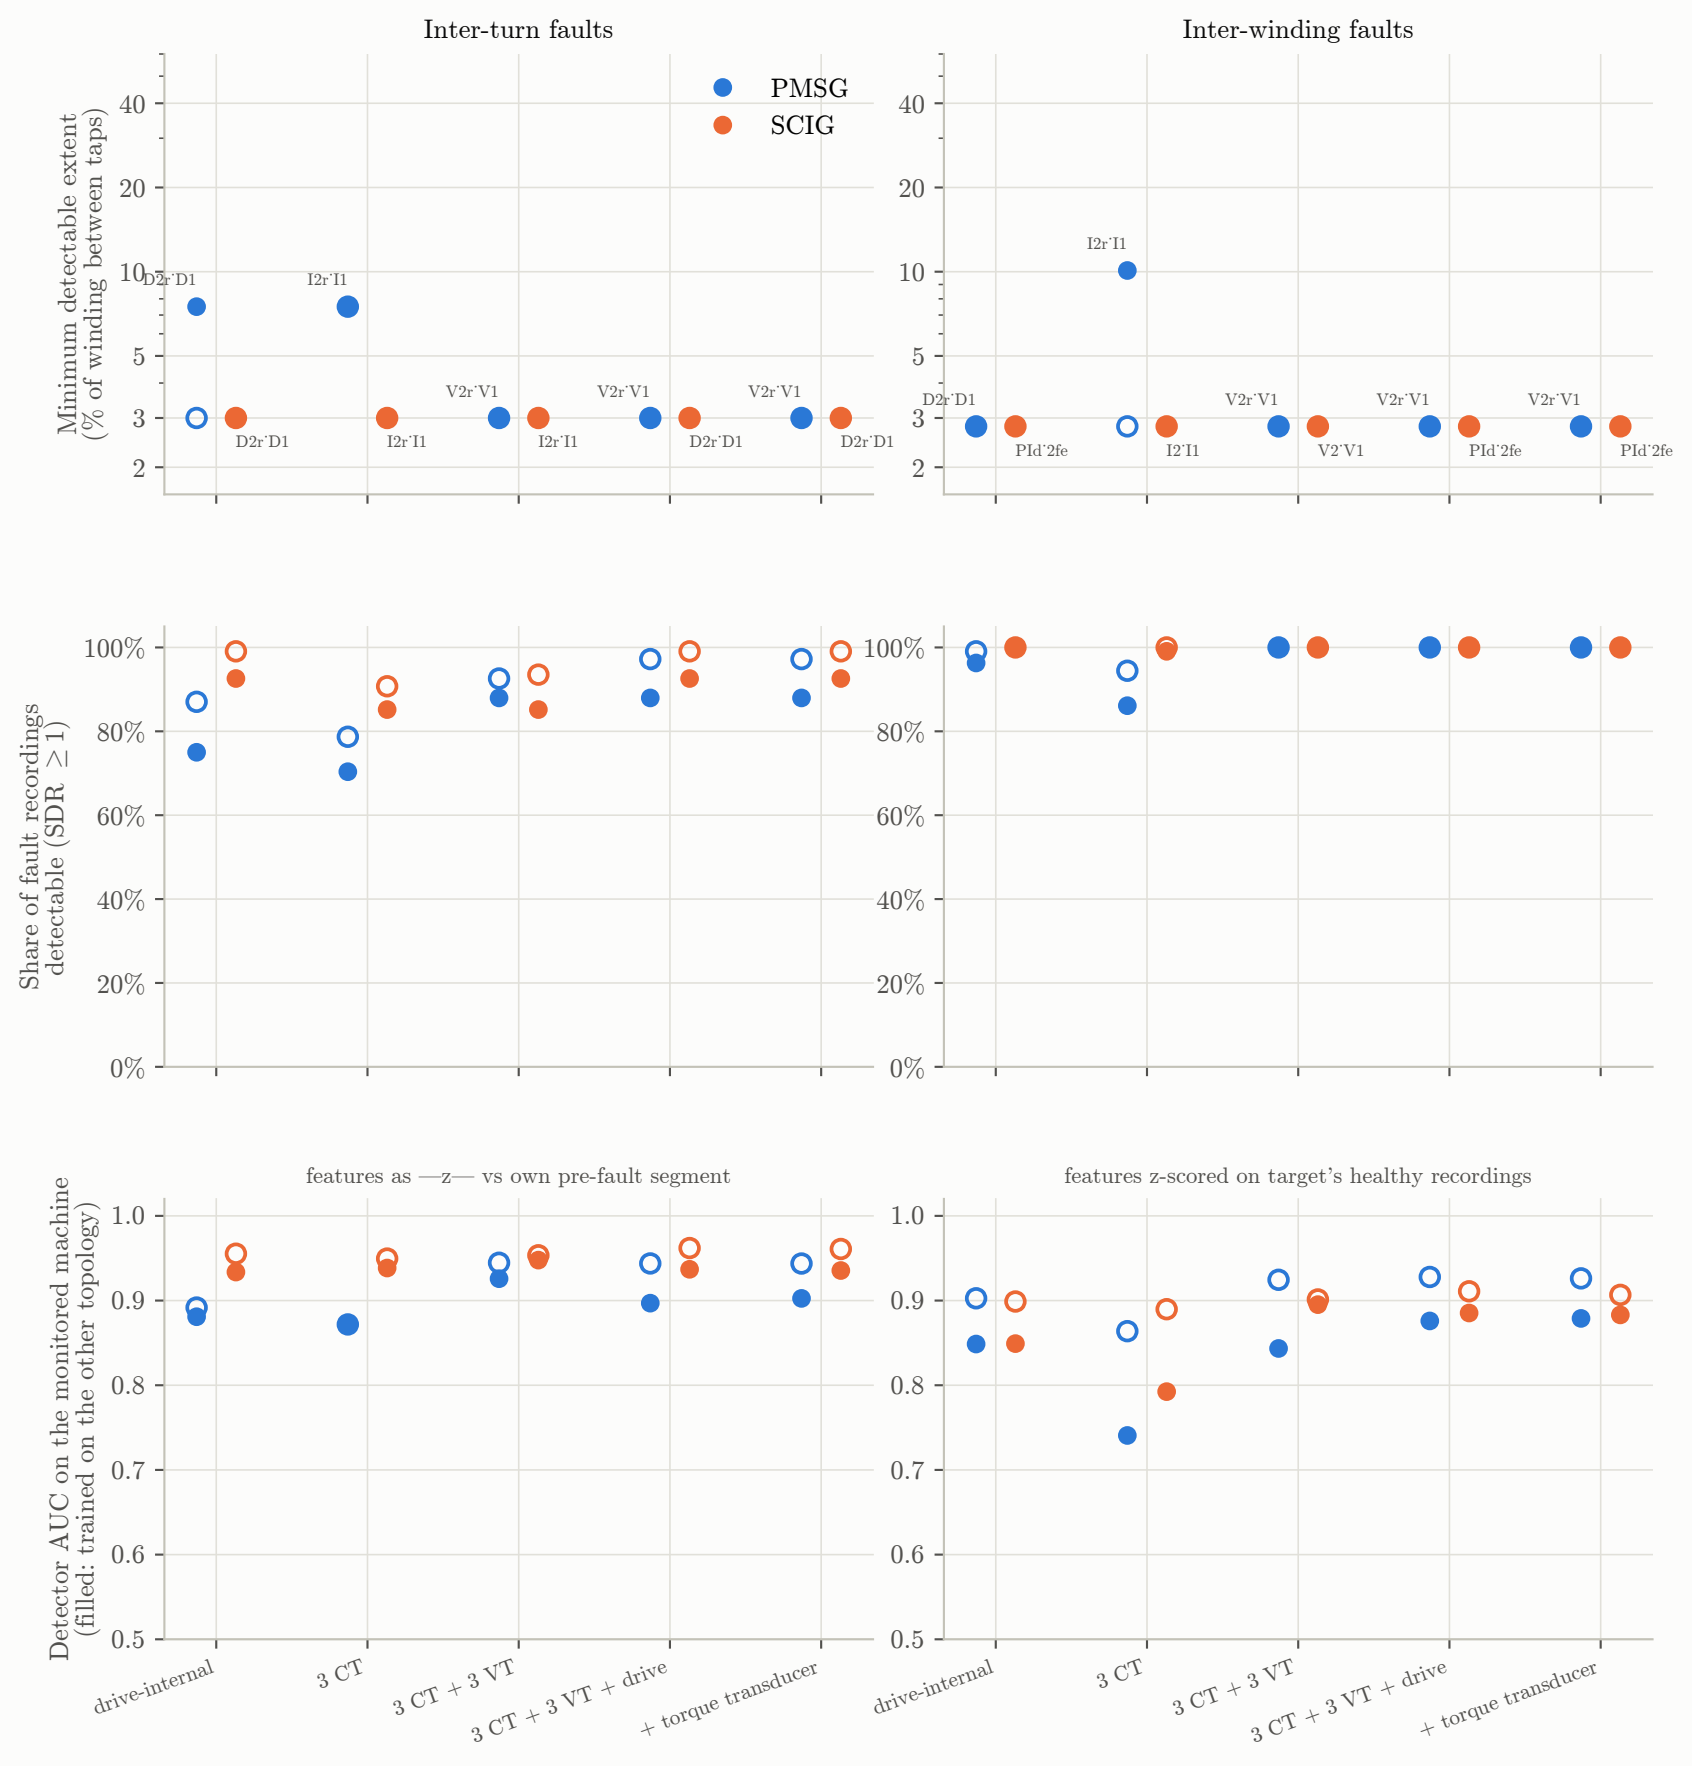
Inter-turn faults
Inter-winding faults
PMSG
SCIG
Minimum detectable extent
(% of winding between taps)
Share of fault recordings
detectable (SDR ≥ 1)
features as —z— vs own pre-fault segment
features z-scored on target's healthy recordings
Detector AUC on the monitored machine
(filled: trained on the other topology)
D2r-D1
I2r-I1
V2r-V1
PId-2fe
V2-V1
I2-I1
drive-internal
3 CT
3 CT + 3 VT
3 CT + 3 VT + drive
+ torque transducer