Runge-Kutta-Chebyshev methods

Hoang Trung Hieu

2020

1 Motivations

In practice, we may face up with some types of problem which may not very stiff, of large dimension. For example,parabolic heat equation or the advection-diffusion-reaction equation(is described below)

$$u_t + au_x = \epsilon u_{xx} + \lambda u(1-u)$$
$$u_x(0,t) = 0, \quad t > 0,$$
$$u(1,t) = \frac{1}{2}(1 + \sin(\omega t)), \quad t > 0$$
$$u(x,0) = v(x), \quad 0 < x < 1$$

where $a, \epsilon, \lambda, \omega$ is advection velocity, diffusion coefficient, source term coefficient and frequency, respectively.

We are expected to develop an explicit method whose absolute stability region lies on the negative real axis as long as possible and we do not concern about the outside of the real axis. In general, when we deal with stiff systems of ODEs:

$$u'(t) = f(t, u(t)), \quad 0 < t \leq T, \quad u(0) = u_0 \text{ is given}$$

The Runge-Kutta-Chebyshev(RKC) is an $s-$stage Runge-Kutta(RK) method designed for explicit integration of modestly stiff systems of ODEs. It satisfies two conditions:

(i) The eigenvalue spectrum of the Jacobian matrix $\partial f(t,u)/\partial U$ should lie in a narrow strip along the negative axis of the complex plane.

(ii) The Jacobian matrix should not digress too much from a normal matrix.

If the Jacobian matrix is symmetric and negative definite then two criteria hold.

2 First-order RKC methods

Our goal is to find a stability polynomial $R(z)$ such that it has the constant coefficient 0, first degree coefficient 1 and $R(z) \leq 1$ for as far as possible as we go

out on the negative real axis. The two first conditions come from the consistency and first order accurary requirement. So, $R(0) = 1$ and $R'(0) = 1$. The last one seems like originate from trigonometry-formed polynomials. And the Chebyshev polynomials related to cosine functions satisfies the all conditions.

Let us denote $T_s(x)$ be the Chebyshev polynomials of degree s and are defined by the recursion below:

$$T_0(x) = 1, T_1(x) = x, T_s(x) = 2xT_{s-1}(x) - T_{s-2}(x)$$

Or it can be defined in the interval $[-1, 1]$ as $T_s(x) = \cos(s \arccos x)$ and for x is outside this interval we can define in term of the hyperbolic cosine $T_s(x) = \cosh(s \cosh^{-1} x)$. The Chebyshev polynomial $T_s(x)$ equioscillates $s + 1$ times in the interval $[-1, 1]$ (see Figure[1])
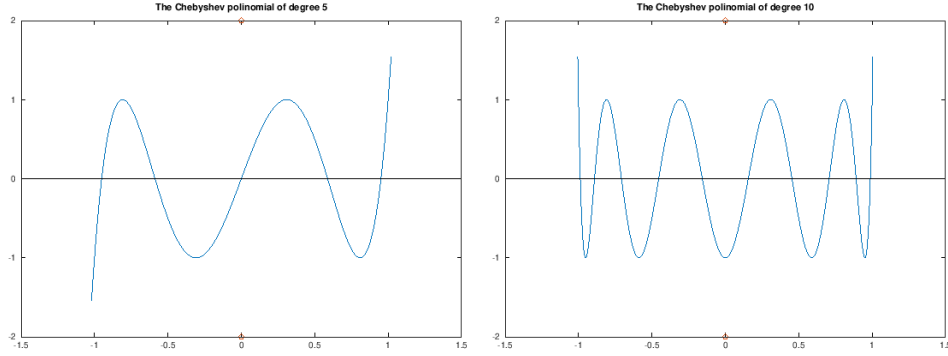
Figure[1].The Chebyshev polinomials of degree 5 and 10

Note that if $-1 \le x \le 1$ iff the absolute value of $T_s(x)$ is not bigger than 1. It requires to shift the function on the left 1. The optimal stability polynomial is a shifted Chebyshev polynomial and has a form $R_s(z) = T_s(1 + \omega z)$.

Theorem 1. *For any explicit, consistent Runge-Kutta method we have stable interval is not exceed $2s^2$. The optimal stability polynomial is the shifted Chebyshev polynomial of the first kind*

$$R_s(z) = T_s\left(1 + \frac{z}{s^2}\right)$$

The proof of this theorem was provided by Marko in 1892 and Van Der Houwen in 1996.

Let observe the coefficients of $R_s(z)$:

$$a_0 = a_1 = 1; a_i = \frac{1 - (i-1)^2/s^2}{i(2i-1)} a_{i-1}$$

where a_i be i-th degree coefficient of $R_s(z)$. It can be calculated because of power series form of Chebyshev polynomials

$$T_s(x) = \sum_{i=0}^{s} \frac{(-s)_i(s)_i}{(1/2)_i i!} \left(\frac{1-x}{2}\right)^i$$

2

where $(x)_i = x(x+1)\cdots(x+i-1)$ for $x \in \mathbb{R}$

For s is big enough and take the limit of z to 0 then we get

$$R_s(z) = \cos(\sqrt{-2z}) \approx e^z - \frac{1}{3}z^2 + O(z^3),$$

it means the leading error coefficient is $1/3$.

Chebyshev polynomials	Shifted Chebyshev polynomials
$T_1(x) = x$	$R_1(z) = 1 + z$
$T_2(x) = 2x^2 - 1$	$R_2(z) = 1 + z + \frac{1}{8}z^2$
$T_3(x) = 4x^3 - 3x$	$R_3(z) = 1 + z + \frac{4}{27}z^2 + \frac{4}{729}z^3$
$T_4(x) = 8x^4 - 8x^2 + 1$	$R_4(z) = 1 + z + \frac{5}{32}z^2 + \frac{1}{128}z^3 + \frac{1}{8192}z^4$
$T_5(x) = 16x^5 - 20x^3 + 5x$	$R_5(z) = 1 + z + \frac{4}{25}z^2 + \frac{28}{3125}z^3 + \frac{16}{78125}z^4 + \frac{16}{9765625}z^5$

In Figure[2], we plot the absolute stability region of first-order RKC methods.The stability intervals contain interior points where $|R(z)| = 1$. So these methods are applicable to only problems with real eigenvalues(such as MOL discretizations of the heat equations).
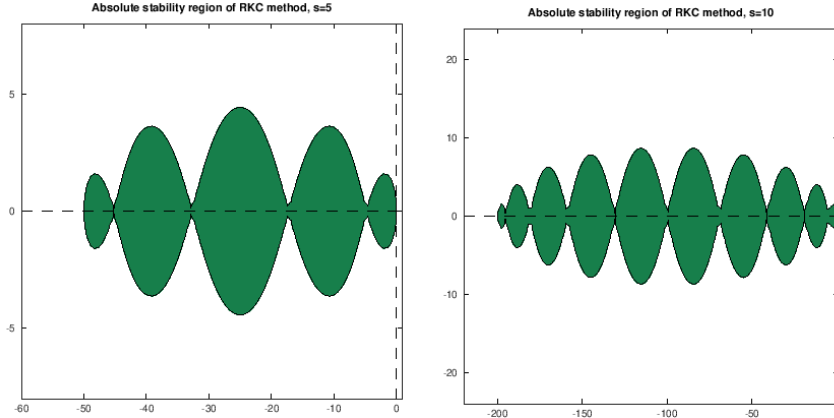
Figure[2].The absolute stability region of the first-order RKC methods with $s = 5$(left) and $s = 10$(right)

3   Second-order RKC methods

As to computational practice, the second-order consistency is more efficient than the first-order. We are looking for a stability polynomial forming $1 + z + \frac{1}{2}z^2 + ...$, since it should be a second order approximation to e^z. A suitable polynomial in analytical form is:

$$B_s(z) = \frac{2}{3} + \frac{1}{3s^2} + \left(\frac{1}{3} - \frac{1}{3s^2}\right)T_s\left(1 + \frac{3z}{s^2 - 1}\right)$$

If we consider z in the real number and s is even then

$$|B_s(z)| \leq 1 \Leftrightarrow -1 - \frac{4s^2 + 2}{s^2 - 1} \leq T_s\left(1 + \frac{3z}{s^2 - 1}\right) \leq 1 \Leftrightarrow -\frac{2}{3}(s^2 - 1) \leq z \leq 0.$$

In case n is odd, the length of stability bound is slightly larger. (see Figure[3]) If we expand B_z, we will get:

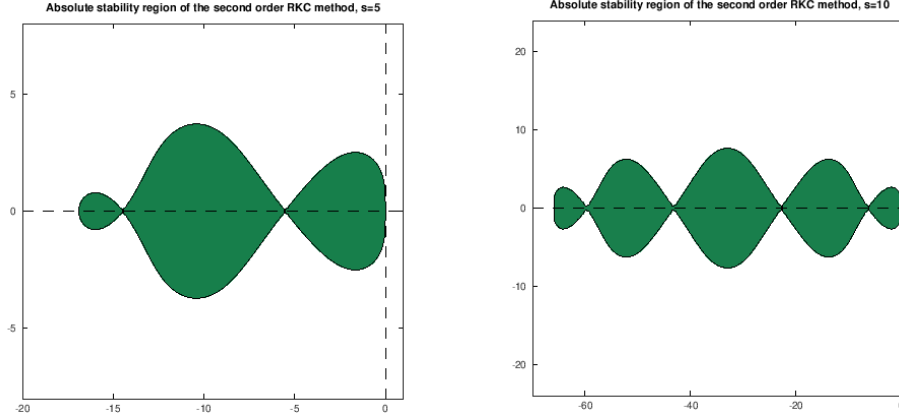$$B_s(z) = 1 + z + \frac{1}{2}z^2 + \frac{-4 + s^2}{10(-1 + s^2)}z^3.$$

Or the coefficient of B_z canm be written as

$$a_0 = a_1 = 1, \quad a_2 = \frac{1}{2}, \quad a_i = \frac{3(1 - (i-1)^2/s^2)}{i(2i - 1)(1 - 1/s^2)}a_{i-1} \quad i > 3.$$

For example, $B_5(z) = 1 + z + \frac{1}{2}z^2 + \frac{7}{80}z^3 + \frac{1}{160}z^4 + \frac{1}{6400}z^5$

$B_6(z) = 1 + z + \frac{1}{2}z^2 + \frac{16}{175}z^3 + \frac{324}{42875}z^4 + \frac{432}{1500625}z^5 + \frac{216}{52521875}z^6$

Take $z \to 0$ and for large s,

$$B_s(z) = \frac{2}{3} + \frac{1}{3}\cos(\sqrt{-6z}) = e^z - \frac{1}{15}z^3 + O(z^4)$$

.That implies the leading error coefficient is $1/15$.

Figure[3].The absolute stability region of the second-order RKC methods with $s = 5$(left) and $s = 10$(right)

In general, the optimal bound for second-order RKC methods is approximately $0.82s^2$, so the polynomial above generates about 80% of the optimal bound.

Remark. The stability polynomial has the optimal bound does not mean it has a optimal small error constant. The second-order RKC method having optimal bound is:

$$\frac{2}{2 - z} - \frac{z}{2 - z}T_s(\cos\frac{\pi}{2} + \frac{z}{2}(1 - \cos\frac{\pi}{s}))$$

4

with stability boundary $\dfrac{2}{\tan^2(\pi/2s)} \approx 0.81s^2$

Remark. For higher-order methods,Riha proved the existence of such optimal polynomials for any order $p \geq 1$ and degree $s \geq p$. The optimal bound for third-order is about $0.49s^2$, for forth-order is nearly $0.34s^2$ and it can be estimated up to 11-th-order.

4 Damped RKC methods

As we mentioned, if we use undamped RKC methods then only the problems which has the eigenvalues of Jacobian matrix are all real can be applied. Hence, it is generally preferable to perturb the polynomial $R_s(z)$ a bit so the absolute of $(R(z))$ is bounded slightly below 1 on the real axis.. This is done by using the shifted Chebyshev polynomial

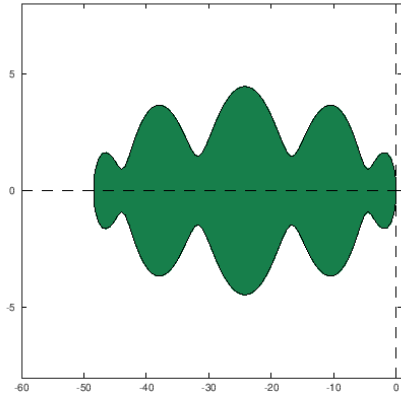$$R_s(z) = \frac{T_s(w_0 + w_1 z)}{T_s(w_0)} \quad , \quad w_1 = \frac{T_s(w_0)}{T_s'(w_0)} \quad , w_0 > 1$$

And we choose $w_0 = 1 + \dfrac{\epsilon}{s^2}$ is so called damping parameter and in practice ϵ usually equals to 0.05.

At the point $z = 1$, $T_s'(1) = s^2, T_s''(1) = \frac{1}{3}s^2(s^2 - 1)$. Using the Taylor-expansion we have $T_s(w_0) \approx 1 + \epsilon$, that implies $R_s(z)$ ranges nearly in the interval $\left[-\dfrac{1}{1+\epsilon}; \dfrac{1}{1+\epsilon}\right]$. Choosing w_1 bases on the first-order consistency. We should choose w_1 such that $R_s'(0) = 1$. The stability boundary is
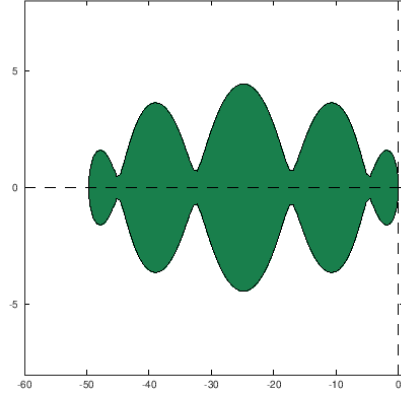
$$\frac{2w_0 T_s'(w_0)}{T_s(w_0)} \approx \left(2 - \frac{4}{3}\epsilon\right) s^2$$

A suitable damping is 5% since the deviation around interior points will increase a bit without a major decrease of stability boundary. In Figure[4.1], we compare the RKC of degree 5 methods with different damping parameters $\epsilon = 0.05$ and $\epsilon = 0.01$
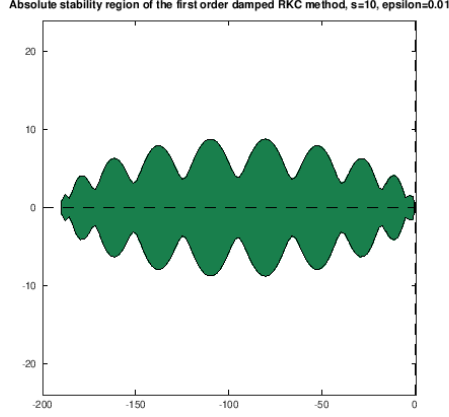
Figure[4.1].The absolute stability region of the damped first-order RKC methods with $s = 5, \epsilon = 0.05$(left) and $s = 5, \epsilon = 0.01$(right)

Figure[4.2].The absolute stability region of the damped first-order RKC methods with $s = 10, \epsilon = 0.05$

Similar to the first-order, the second-order RKC methods are damped:

$$B_s(z) = 1 + \frac{T''s(w_0)}{(T'_s(w_0))^2}(T_s(w_0 + w_1 z) - T_s(w_0)) \quad , \quad w_1 = \frac{T'_s(w_0)}{T''_s(w_0)}$$

Let us explain why we could find $B_s(z)$. Suppose $B_s(z)$ has the form $a + b\dfrac{T_s(w_0 + w_1 z)}{T_s(w_0)}$. We are developing the second-order methods, so it requires $B_s(0) = 1, B'_s(0) = 1, B''_s(0) = 1$. That implies

$$\begin{cases} a + b = 1 \\ b\dfrac{w_1 T'_s(w_0)}{T_s(w_0))} = 1 \\ b\dfrac{w_1^2 T''_s(w_0)}{T_s(w_0))} = 1 \end{cases} \Rightarrow \begin{cases} w_1 = \dfrac{T'_s(w_0)}{T''_s(w_0)} \\ b = \dfrac{T_s(w_0)T''_s(w_0)}{(T'_s(w_0))^2} \\ a = 1 - \dfrac{T_s(w_0)T''_s(w_0)}{(T'_s(w_0))^2} \end{cases}$$

The length of boundary can be approximated to

$$\frac{(w_0 + 1)T''_s(w_0)}{T'_s(w_0)} \approx \frac{2(T''_s(1) + \epsilon T'''_s(1))}{T'_s(1) + \epsilon T''_s(1)} \approx \frac{2}{3}(s^2 - 1)(1 - \frac{2}{15}\epsilon)$$

Here we use $T''_s(1) = \frac{1}{3}s^2(s^2 - 1)$ and $T'''_s(1) = \frac{1}{15}s^2(s^2 - 1)(s^2 - 4)$.
If we are expected that the interior of the stability interval get 5% damping, we need to choose the damping parameter $\epsilon \approx 0.15$. The stability boundary will reduced 2% compared to undamped case.
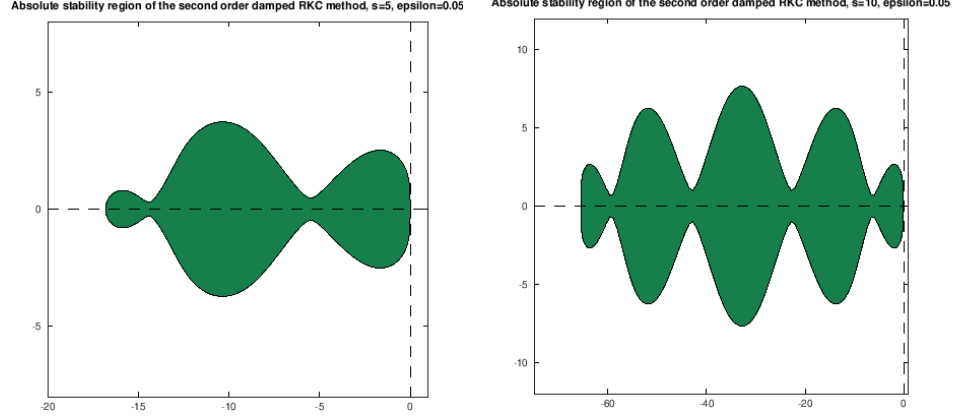
Figure[5].The absolute stability region of the damped second-order RKC methods with $s = 5, \epsilon = 0.05$(left) and $s = 10, \epsilon = 0.05$(right)

5   General kernel representation of RKC methods

For explicit RK methods, the formula can be written generally as :

$$
\begin{aligned}
y_{n0} &= y_n \\
y_{n1} &= y_n + h\alpha_{10}f(t_n + c_0h, y_{n0})) + r_1 \\
y_{n2} &= y_n + h(\alpha_{20}f(t_n + c_0h, y_{n0}) + \alpha_{21}f(t_n + c_1h, y_{n1}) + r_2 \\
&\ \ \vdots \\
y_{nj} &= y_n + h\sum_{k=0}^{j-1}\alpha_{kj}f(t_n + c_jh, y_{nj}) + r_j, \quad j = 1,\cdots,s. \\
y_{n+1} &= y_{ns}
\end{aligned}
$$

where r_j are local perturbations representing for example round-off errors.
We consider the general stability polynomials are of the form

$$R_j(z) = a_j + b_jT_j(w_0 + w_1z), \quad a_j = 1 - b_jT_j(w_0)$$

where w_0, w_1 and b_s are given, b_j with $1 \le j < s$ are unidentified. $R_j(z)$ can be comprehended as the approximations at the point $x_0 + c_jh$
Set $R_0(z) = a_0 + b_0 \equiv 1$. Note that

$$R_j(z) - 1 = b_j(T_j(w_0 + w_1z) - T_j(w_0))$$

Using the recursive relationship of the Chebyshev polynomial we get

$$R_j(z) - 1 = \mu_j(R_{j-1}(z) - 1) + \nu_j(R_{j-2}(z) - 1) + \tilde{\mu}_jz(R_{j-1}(z) - a_{j-1})$$

7

where $\tilde{\mu}_1 = b_1 w_1$, $\quad \mu_j = \dfrac{2b_j w_0}{b_{j-1}}$, $\quad \nu_j = \dfrac{-b_j}{b_{j-2}}$, $\quad \tilde{\mu}_j = \dfrac{2b_j w_1}{b_{j-1}}$

From these formulas we can infer the RKC integration formulas for the nonlinear problem $w'(t) = f(t, w(t))$ by connecting R_j with the intermediate approximation y_{nj} and the occurrence of z with a function evaluation

$y_{n0} = y_n$

$y_{n1} = y_n + h\mu_1 f(t_n + c_0 h, y_{n0}))$

$\vdots$

$y_{nj} = (1 - \mu_i - \nu_j)y_n + \mu_j y_{n,j-1} + \nu_j y_{n,j-2}$
$\qquad + h\left(\tilde{\mu}_j f(t_n + c_{j-1}h, y_{n,j-1}) + \tilde{\gamma}_j f(t_n + c_0 h, y_{n0})\right) \text{ where} j = 2, \cdots, s$

$y_{n+1} = y_{ns}$

where $\tilde{\mu}_1 = b_1 w_1$, $\quad \mu_j = \dfrac{2b_j w_0}{b_{j-1}}$, $\quad \nu_j = \dfrac{-b_j}{b_{j-2}}$, $\quad \tilde{\mu}_j = \dfrac{2b_j w_1}{b_{j-1}}$, $\quad \tilde{\gamma}_j = -a_{j-1}\tilde{\mu}_j$

Question: How to choose the value of b_j and c_j?

- In case of the damped first-order RKC methods, we should choose b_j such that

$$R_j(z) = \frac{T_j(w_0 + w_1 z)}{T_j(w_0)} \quad , \quad w_1 = \frac{T_s(w_0)}{T_s'(w_0)} \quad , w_0 = 1 + \frac{\epsilon}{s^2}$$

The parameters b_j are chosen to guarantee the first-order of the method. The parameters c_j was defined as the linear coefficient of $R_j(z)$, namely $R_j(z) = 1 + c_j z + O(z^2) = 1 + b_j w_1 T_j'(w_0)z + O(z^2)$.So ,

$$b_j = \frac{1}{T_j(w_0)}, \quad c_j = \frac{T_s(w_0)T_j'(w_0)}{T_s'(w_0)T_j(w_0)} \quad (1 \le j \le s - 1), \quad c_s = 1$$

- As to the damped second-order RKC methods,

$$R_j(z) = 1 + b_j w_1 T_j'(w_0)z + \frac{1}{2}b_j w_1^2 T_j''(w_0)z^2 + O(z^3)$$

By second-order approximation of $x_0 + c_j h$ we get

$$R_j(0) = 1, \quad R_j'(0) = c_j, \quad R_j''(0) = c_j^2$$

Similar to the first-order method, we get

$$b_j = \frac{T_j''(w_0)}{(T_j'(w_0))^2}, \quad c_j = \frac{T_s'(w_0)T_j''(w_0)}{T_s''(w_0)T_j'(w_0)}$$

6   Numerical Experiments

6.1   Test problem

Let us consider the initial value problem

$$x''(t) = -\frac{1}{4}x(t), \quad t \in [0, 4\pi]$$

$N = 2^i$	$i = 10$	$i = 11$	$i = 12$	$i = 13$	$i = 14$
Error (RKC5)	1.3692e-2	6.8231e-3	3.4059e-3	1.7015e-3	8.5039e-4
Error (RKC10)	1.3480e-2	6.7179e-3	3.3534e-3	1.6753e-3	8.3731e-4
Error (EE)	2.0450e-2	1.0174e-2	5.0747e-3	2.5342e-3	1.2663e-3

Table 1: Errors for explicit 1st-order RKC method ($s = 5, 10$) and EE

$N = 2^i$	$i = 10$	$i = 11$	$i = 12$	$i = 13$	$i = 14$
Error (RKC5)	1.7356e-5	4.3377e-6	1.0843e-6	2.7104e-7	6.7758e-8
Error (RKC10)	1.5229e-5	3.8060e-6	9.5136e-7	2.3782e-7	5.9453e-8
Error (RK2)	3.7001e-5	9.2462e-6	2.3111e-6	5.7770e-7	1.4442e-7

Table 2: Errors for explicit 2nd-order RKC method ($s = 5, 10$) and RK2

with the initial conditions: $x(0) = 0; x'(0) = 1$.

The exact solution for this problem is $x(t) = \cos(\frac{x}{2})$. We implement the first-order and second-order damped RKC program with $s = 5$ stages and $s = 10$ stages , $\epsilon = 0.05$ damping parameter. Comparing to exact solution with the number of interval $N = 2^i$, $i = 10, \ldots, 14$, we see that the RKC methods run more accurate than the RK methods with same order and it also points out that increasing the number of stage decrease the error abit, see Table[1][2]. (Errors are comprehended in maximum norm).

6.2   Semi-discretizated heat problem

Let us consider semi-discretizated heat problem with perturbation:

$$u_t = u_{xx} + u, \quad x \in [0, 1], \quad t \in [0, 1/2]$$

with initial condition $u(0, x) = \sin(\pi x)$ and boundary conditions $u(t, 0) = u(t, 1) = 0$.

The exact solution is $u(t, x) = e^{(1-\pi^2)t} \sin(\pi x)$. We create in the $x-$axis N new points and define $x_i = \frac{i}{N+1}$ and the distance between two consecutive points is $h = \frac{1}{N+1}$. Applying the approximation with the second partial derivative

$$u_t(t, x_i) = \frac{u(t, x_{i+1}) - 2u(t, x_i) + u(t, x_{i-1})}{h^2} + u(t, x_i)$$

We denote $u(t, x_i) = u_i(t)$ and $U(t) = (u_0(t), \ldots, u_{N+1}(t))^T$. Since $u(t, 0) = u(t, 1) = 0$, we get

$$U'(t) = \begin{pmatrix} 0 & 0 & 0 & & & & & 0 \\ 0 & 1-\frac{2}{h^2} & \frac{1}{h^2} & & & & & 0 \\ 0 & \frac{1}{h^2} & 1-\frac{2}{h^2} & \frac{1}{h^2} & & & & \\ & & & \ddots & & & & \\ & & & & \frac{1}{h^2} & 1-\frac{2}{h^2} & \frac{1}{h^2} & 0 \\ 0 & & & & & \frac{1}{h^2} & 1-\frac{2}{h^2} & 0 \\ 0 & & & & & & 0 & 0 \end{pmatrix} U(t)$$

and $U(0) = (u_0(0), \ldots, u_{N+1}(0))^T = (\sin 0, \sin(\pi \Delta x), \ldots, \sin \pi)^T$
We can rewrite the equation as:

$$U'(t) = \left(\frac{1}{h^2} \text{tridiag}(1, -2, 1) + I_{N-1} \right) U(t)$$

where we omit the first and last compenents of $U(t)$, tridiag is a tridiagonal matrix with the three stencils.
In the lecture we showed that the largest eigenvalue of $\text{tridiag}(1, -2, 1)$ is

$$\frac{4}{h^2} \cos^2 \left(\frac{\pi h}{2} \right) \approx \frac{-4}{h^2}$$

We now use a time stepping scheme to discretize the problem in time. We take time steps size k. For for convenience, we choose $h = k$. To compute the total number of time steps, we also take into account the number of stages required, which is obtained by

$$s = \sqrt{\frac{\varrho(A)k}{\sigma}}$$

where $\varrho(A)$ is the spectral radius of the MOL discretization matrix of the heat equation, and σ is a positive scalar. For the first order RKC schemes, the literature [4] suggests $\sigma = 1.9$, and for the second order RKC schemes, $\sigma = 0.653$. In particular, $\varrho(A) \approx \left| -4/h^2 \right|$, $k = h$ then

$$s = \frac{2}{\sqrt{\sigma h}}$$

For small values of h, the RKC schemes will generally require much fewer time steps than the Forward Euler scheme.
In Table[3], we calculate the errors between exact solution and numerical solution using different RKC multi-stage methods. The time interval equals $x-$axis interval N is chosen as the optimal choice such that $s \approx 2/\sqrt{\sigma h}$. Figure[6] is the plot of these solutions.
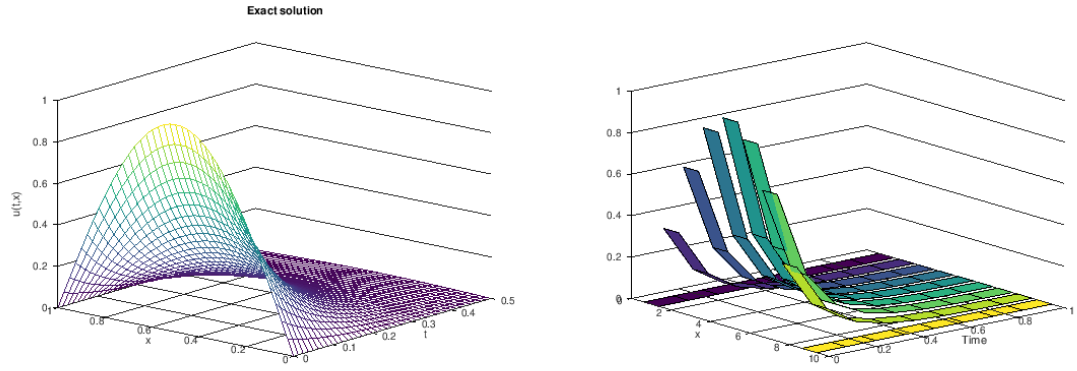
Exact solution

Figure[6.1].The exact solution of the heat problem and numerical solution
solved by RKC 10 stages, $N = 8$
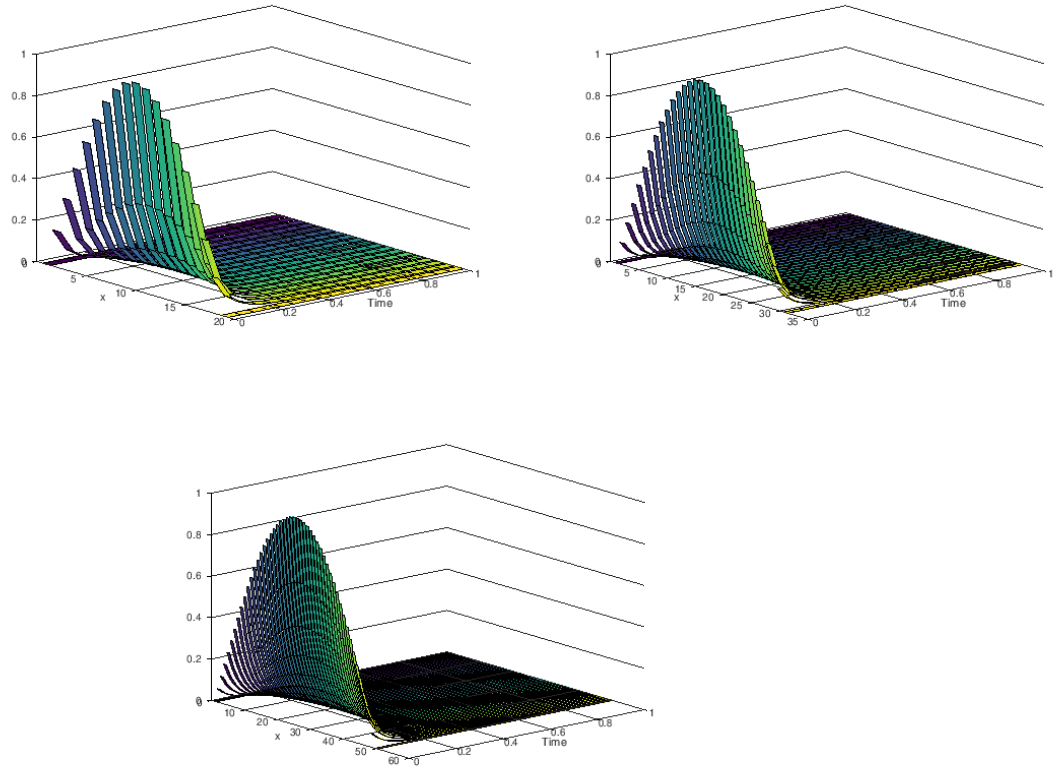
Figure[6.2].Numerical solution solved by RKC methods, $s = 15, N = 18$,
$s = 19, N = 30$ and $s = 25, N = 50$

11

The number of stage and interval	Error (inf norm)
$s = 10, N = 8$	0.67001
$s = 15, N = 18$	0.38906
$s = 19, N = 30$	0.25595
$s = 25, N = 50$	0.16549

Table 3: Errors between exact solution and numerical solution using different RKC multi-stage methods

6.3 Diffusion problem

The diffusion problem is the following

$$\frac{\partial u}{\partial t} = A + u^2 v - (B+1)u + \alpha \frac{\partial^2 u}{\partial x^2}$$

$$\frac{\partial v}{\partial t} = Bu - u^2 v + \alpha \frac{\partial^2 v}{\partial x^2}$$

$$0 \le x \le 1, \quad 0 \le t \le 10$$

where $A = 1, B = 3, \alpha = 1/50$ and boundary conditions

$$u(0,t) = u(1,t) = 1, \quad v(0,t) = v(1,t) = 3$$
$$u(x,0) = 1 + \sin(2\pi x), \quad v(x,0) = 3$$

Replacing the second partial derivative terms by the approximation $u''(x) = \lim_{h \to 0} \frac{u(x+h) - 2u(x) + u(x-h)}{h^2}$. In particular, split the $x-$axis into N points and define $x_i = \frac{i}{N+1}$ and the uniform differences between two consecutive points is $\Delta x = \frac{1}{N+1}$.

$$u_i' = 1 + u_i^2 v_i - 4u_i + \frac{\alpha}{(\Delta x)^2}(u_{i-1} - 2u_i + u_{i+1})$$

$$v_i' = 3u_i - u_i^2 v_i + \frac{\alpha}{(\Delta x)^2}(v_{i-1} - 2v_i + v_{i+1})$$

$$u_0(t) = u_{N+1}(t) = 1, \quad v_0(t) = v_{N+1}(t) = 3$$
$$u_i(0) = 1 + \sin(2\pi x_i), \quad v_i(0) = 3$$

The Jacobian matrix is $2N \times 2N$ matrix

$$\begin{pmatrix} \text{diag}(2u_i v_i - 4) & \text{diag}(u_i^2) \\ \text{diag}(3 - 2u_i v_i) & \text{diag}(-u_i^2) \end{pmatrix} + \frac{\alpha}{(\Delta x)^2} \begin{pmatrix} K & 0 \\ 0 & K \end{pmatrix}$$

where

$$K = \begin{pmatrix} -2 & 1 & & & & \\ 1 & -2 & 1 & & & \\ & 1 & \ddots & \ddots & & \\ & & & \ddots & -2 & 1 \\ & & & & 1 & -2 \end{pmatrix}$$

The eigenvalues of K is $\lambda_k(K) = -4 \left(\sin \dfrac{\pi k}{2N+2} \right)^2$. Then Jacobian matrix's eigenvalues lie in a trip neighbouring the interval $[-4\alpha(N+1)^2, 0]$. That's why the RKC methods can be applied for this problem.

We illustrate the numerical solution solved by using RKC10 method with 101 time inteval and $\Delta x = 1/50$. (See Figure [7])
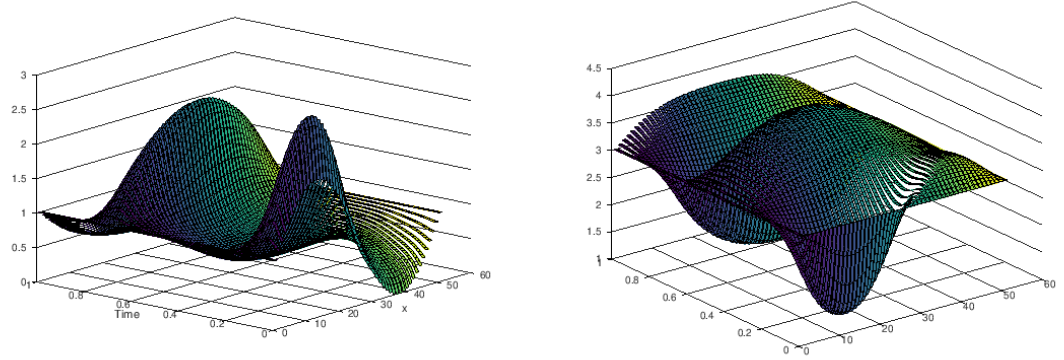
Figure[7].Numerical solution of diffusion problem $u(t,x)$ (left) and $v(t,x)$ (right)

Codes

All codes was uploaded at https://github.com/hthtb22/rkc-elte.

References

[1] E.Hairer, (1996) *G.Wanner Solving Ordinary Differential Equations II - stiff and differential-algebraic problems*, Springer,15-39

[2] Randall and J. LeVeque, (2007), *Finite Difference Methods for Ordinary and Partial Differential Equations*,SIAM, 175-179

[3] Hundsdorfer, W. and Verwer, J. (2003). *Numerical Solution of Time-Dependent Advection-Diffusion-Reaction Equations*. Springer Series in Computational Mathematics, 419–445.

[4] J. G. Verwer, W. H. Hunsdorfer, and B. P. Sommeijer. *Convergence properties of the Runge-Kutta-Chebyshev method.* Numer. Math., 57:157-178, 1990.

[5] Zhang Limei, (2010),*The Second-order Explicit RKC Method*, CMCE conference.