

1

Wideband
deployable
antenna



3




Fully integrated RFSoc
receiver

- ✓ ADC
- ✓ Spectrometer
- ✓ VNA for calibration
- ✓ Basic onboard processor

2

Low Noise Amplifier
and calibrators

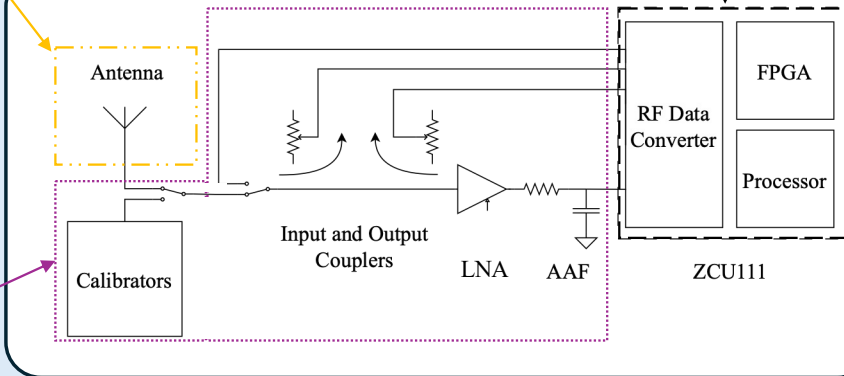

CosmoCube payload diagram

Main payload specifications

6-m wideband dipole
Single polarization
Deployable structure
Low achromatic losses

“Dicke” switch calibrator
15 calibrators
Switches – IL < 0.5 dB
Switches – Iso > 60 dB
Low Noise Amplifier with
 $S_{11} < -30$ dB

ADC + Spectrometer
8 – 46 [100] MHz
14 bits ADC
10 KHz narrow channels
100 KHz wide channels
SFDR > 70dBc
VNA
1 channel VNA function
 $|\Delta S_{11}| < 0.05$ dB