

Chapter 4

Network Layer

A S M Touhidul Hasan, Ph.D.
Assistant Professor,
Department of CSE, UAP

Chapter 4: Outline of Lecture 16

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

Hierarchical routing

our routing study thus far - idealization

- ❖ all routers identical
- ❖ network “flat”

... *not* true in practice

scale: with 600 million destinations:

- ❖ can't store all dest's in routing tables!
- ❖ routing table exchange would swamp links!

administrative autonomy

- ❖ internet = network of networks
- ❖ each network admin may want to control routing in its own network

Hierarchical routing


- ❖ aggregate routers into regions, “autonomous systems” (AS)
- ❖ routers in same AS run same routing protocol
 - “intra-AS” routing protocol
 - routers in different AS can run different intra-AS routing protocol

gateway router:

- ❖ at “edge” of its own AS
- ❖ has link to router in another AS


Example: choosing among multiple ASes

- ❖ now suppose AS1 learns from inter-AS protocol that subnet **x** is reachable from AS3 *and* from AS2.
- ❖ to configure forwarding table, router 1d must determine which gateway it should forward packets towards for dest **x**
 - this is also job of inter-AS routing protocol!

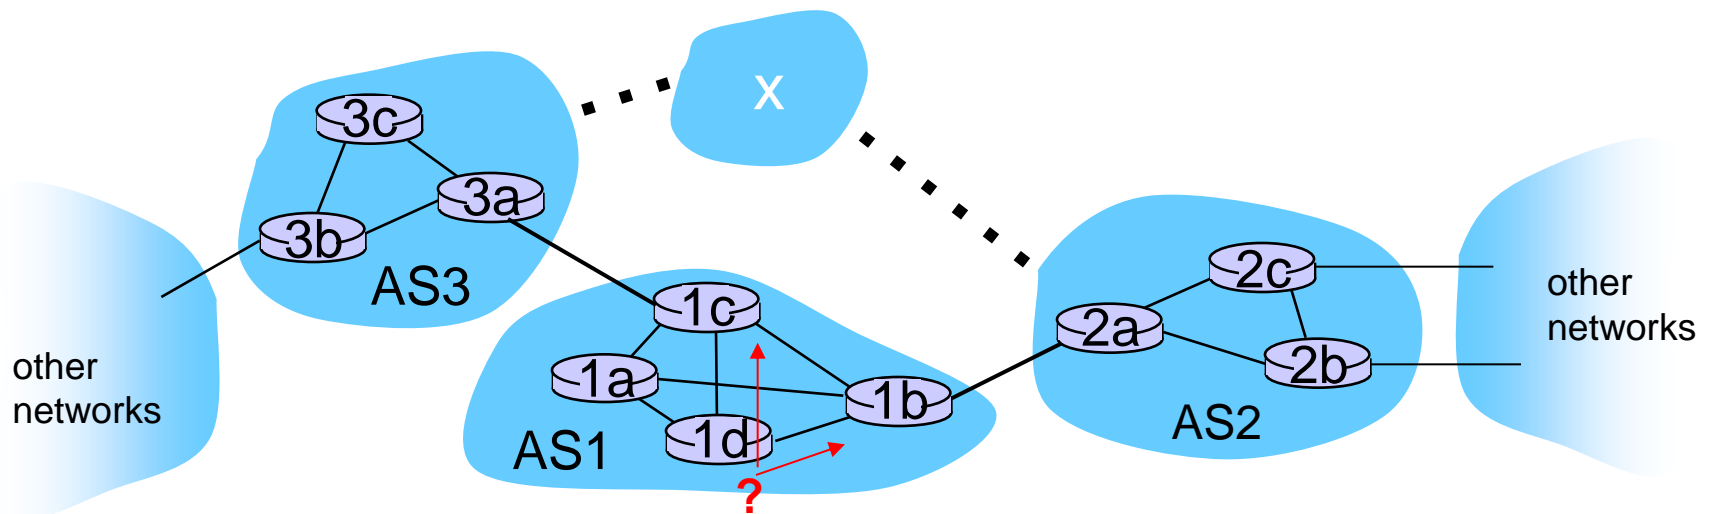

Example: choosing among multiple ASes

- ❖ now suppose AS1 learns from inter-AS protocol that subnet **x** is reachable from AS3 *and* from AS2.
- ❖ to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest **x**
 - this is also job of inter-AS routing protocol!
- ❖ **hot potato routing: send** packet towards closest of two routers.

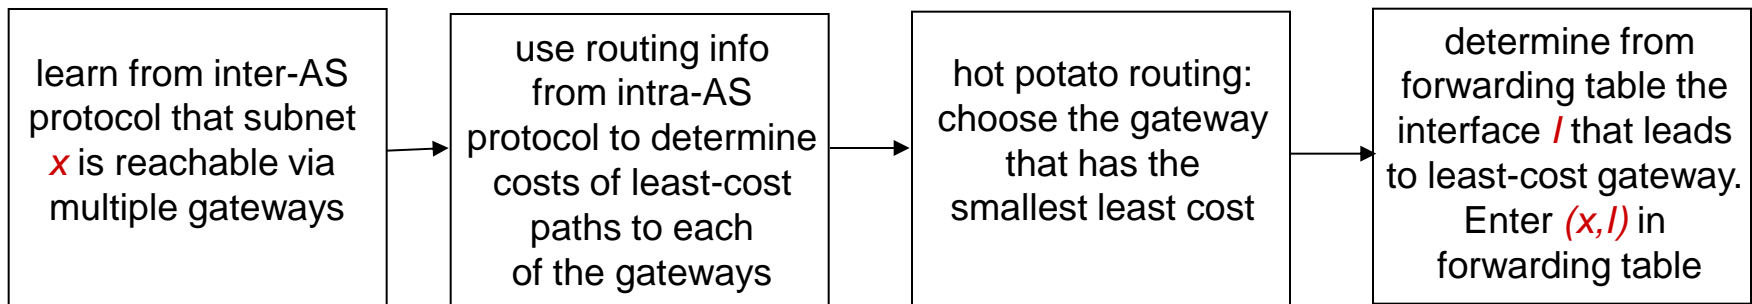

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP


4.7 broadcast and multicast routing

Intra-AS Routing

- ❖ also known as *interior gateway protocols (IGP)*
- ❖ most common intra-AS routing protocols:
 - RIP: Routing Information Protocol
 - OSPF: Open Shortest Path First
 - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)


- ❖ included in BSD-UNIX distribution in 1982
- ❖ distance vector algorithm
 - distance metric: # hops (max = 15 hops), each link has cost 1
 - DVs exchanged with neighbors every 30 sec in response message (aka **advertisement**)
 - each advertisement: list of up to 25 destination **subnets** (in IP addressing sense)

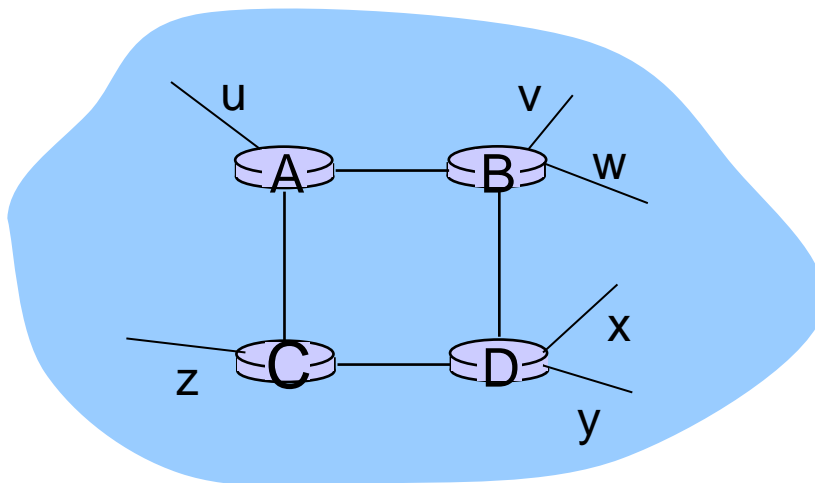

from router A to destination **subnets**:

<u>subnet</u>	<u>hops</u>
u	1
v	2
w	2
x	3
y	3
z	2

RIP: example

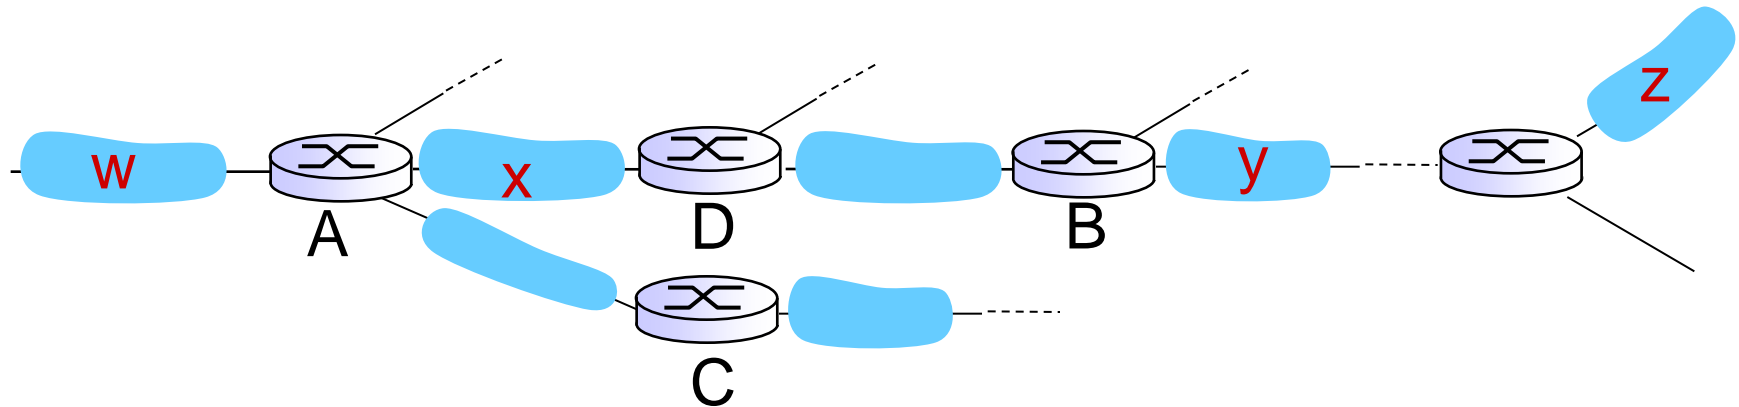


routing table in router D

destination subnet	next router	# hops to dest
W	A	2
y	B	2
z	B	7
x	--	1
....

RIP: example

A-to-D advertisement

dest	next	hops
W	-	1
X	-	1
Z	C	4
...

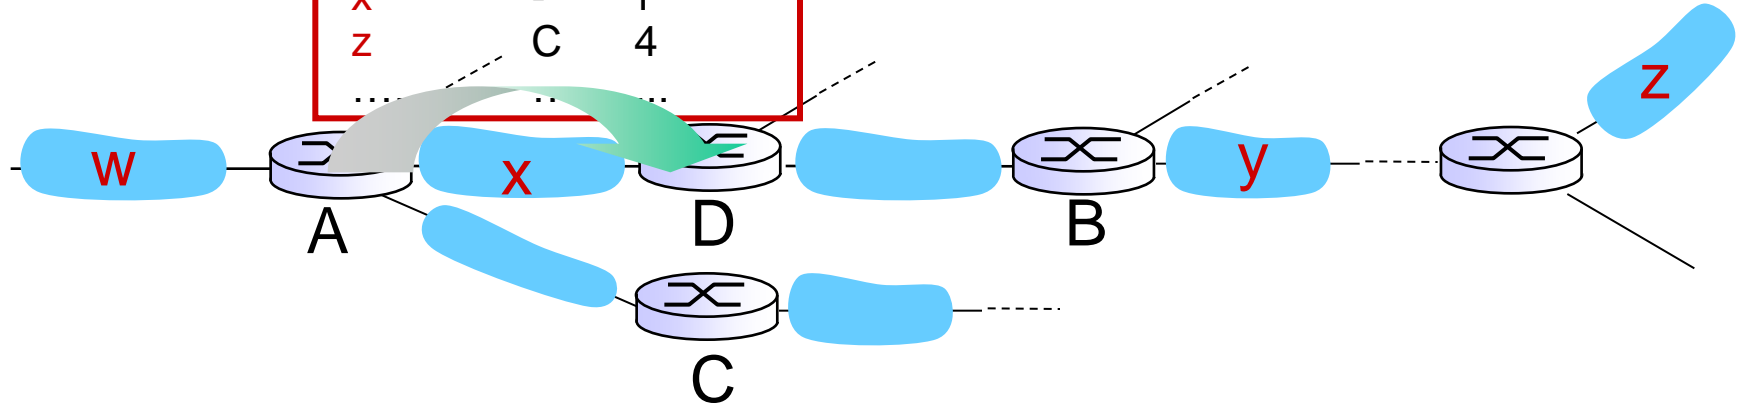

routing table in router D

destination subnet	next router	# hops to dest
W	A	2
y	B	2
Z	B → A	7 → 5
X	--	1
....


RIP: link failure, recovery

if no advertisement heard after 180 sec -->
neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

RIP table processing

- ❖ RIP routing tables managed by *application-level* process called route-d (daemon)
- ❖ advertisements sent in UDP packets, periodically repeated

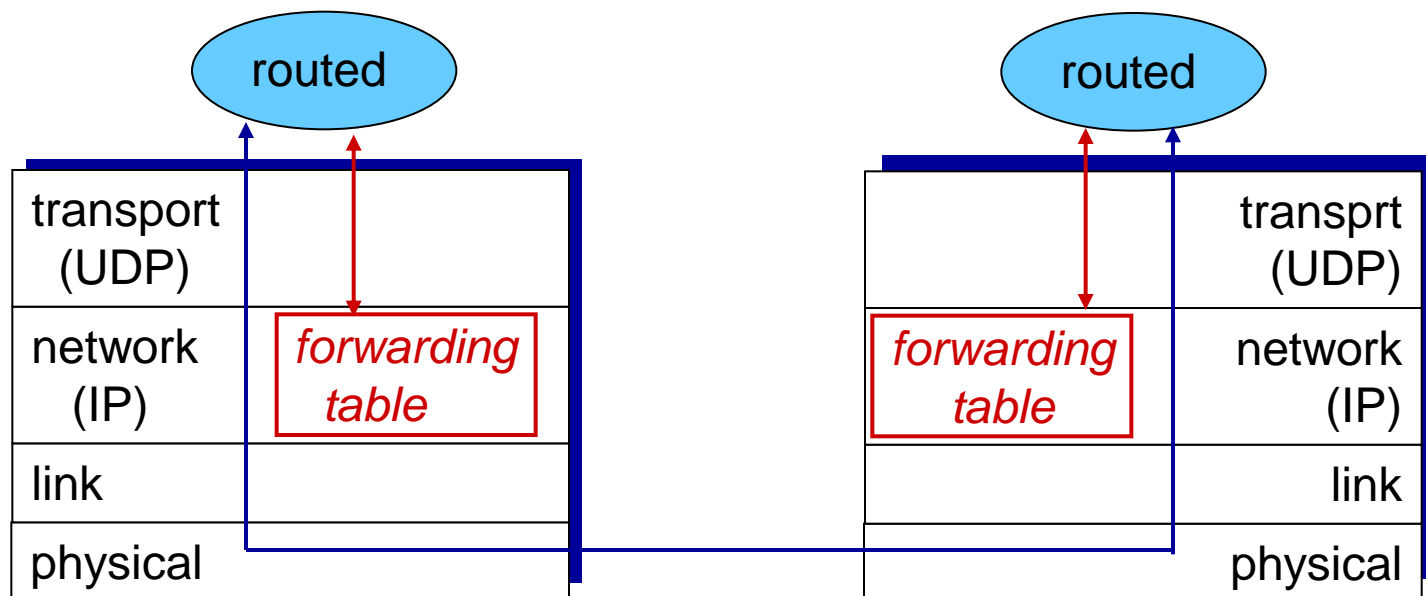


OSPF (Open Shortest Path First)

- ❖ “open”: publicly available
- ❖ uses link state algorithm
 - LS packet dissemination
 - topology map at each node
 - route computation using Dijkstra’s algorithm
- ❖ OSPF advertisement carries one entry per neighbor
- ❖ advertisements flooded to *entire* AS
 - carried in OSPF messages directly over IP (rather than TCP or UDP)
- ❖ *IS-IS routing* protocol: nearly identical to OSPF

OSPF “advanced” features (not in RIP)

- ❖ **security**: all OSPF messages authenticated (to prevent malicious intrusion)
- ❖ **multiple** same-cost **paths** allowed (only one path in RIP)
- ❖ for each link, multiple cost metrics for different **TOS** (e.g., satellite link cost set “low” for best effort ToS; high for real time ToS)
- ❖ integrated uni- and **multicast** support:
 - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- ❖ **hierarchical** OSPF in large domains.

Hierarchical OSPF

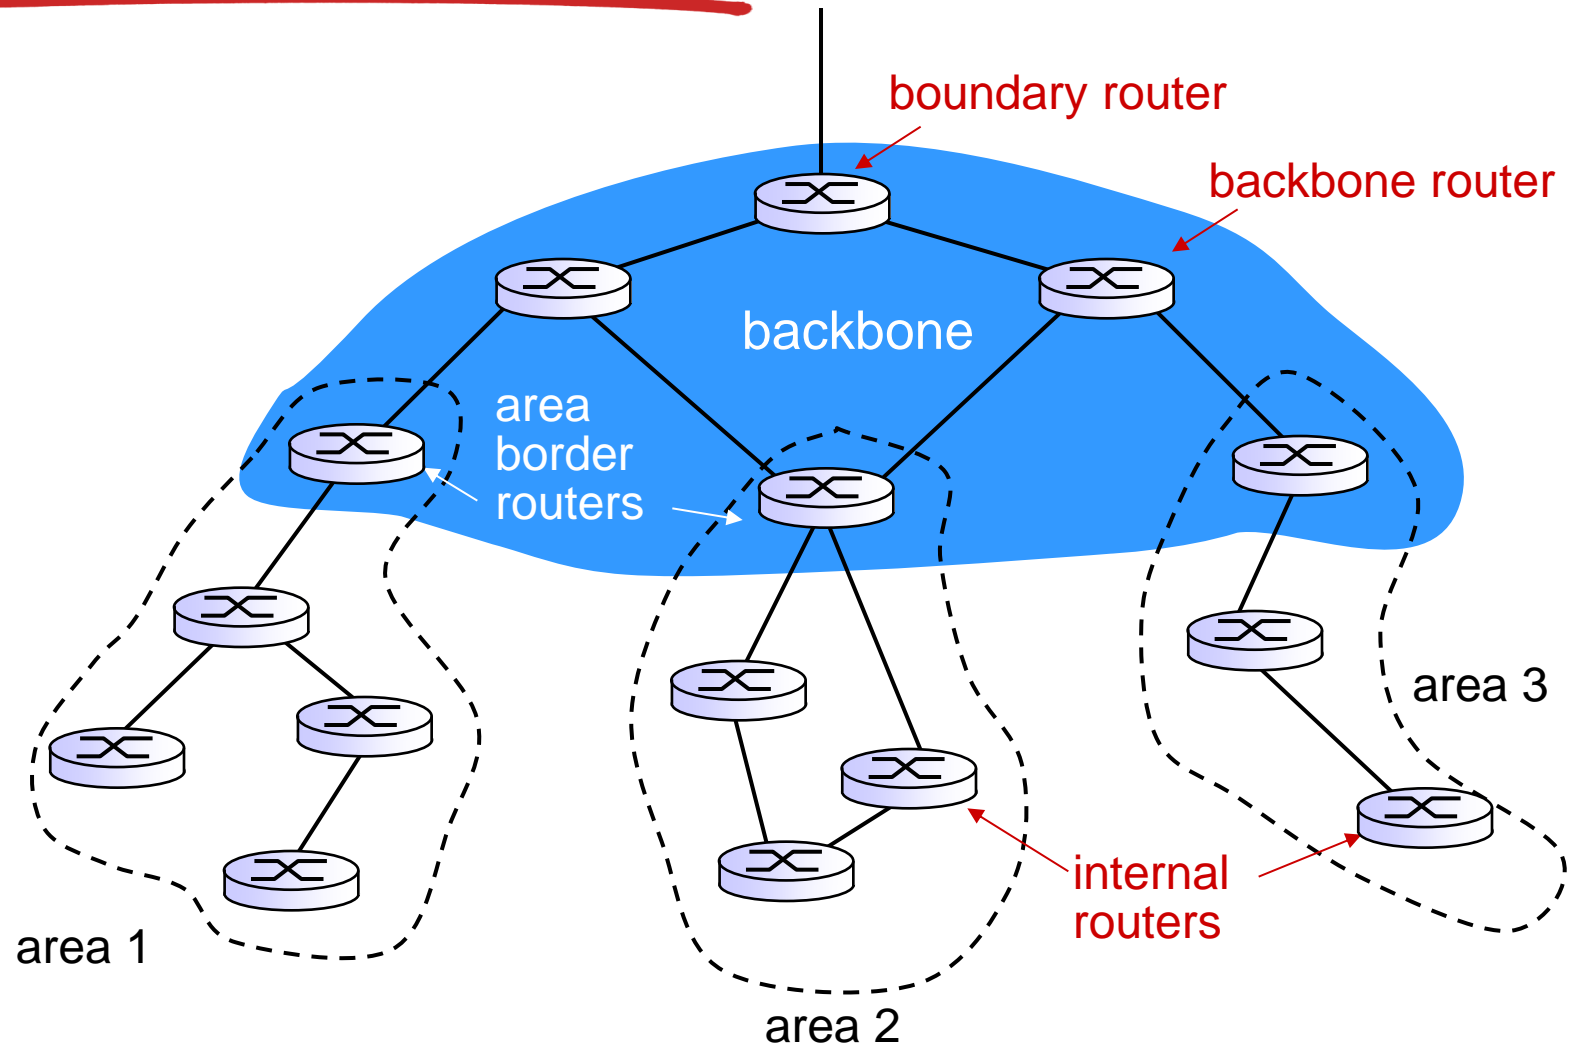

Hierarchical OSPF


- ❖ *two-level hierarchy*: local area, backbone.
 - link-state advertisements only in area
 - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- ❖ *area border routers*: “summarize” distances to nets in own area, advertise to other Area Border routers.
- ❖ *backbone routers*: run OSPF routing limited to backbone.
- ❖ *boundary routers*: connect to other AS' s.

Internet inter-AS routing: BGP

- ❖ **BGP (Border Gateway Protocol):** *the de facto inter-domain routing protocol*
 - “glue that holds the Internet together”
- ❖ BGP provides each AS a means to:
 - **eBGP:** obtain subnet reachability information from neighboring ASs.
 - **iBGP:** propagate reachability information to all AS-internal routers.
 - determine “good” routes to other networks based on reachability information and policy.
- ❖ allows subnet to advertise its existence to rest of Internet: “*1 am here*”


BGP basics

- ❖ **BGP session:** two BGP routers (“peers”) exchange BGP messages:
 - advertising *paths* to different destination network prefixes (“path vector” protocol)
 - exchanged over semi-permanent TCP connections
- ❖ when AS3 advertises a prefix to AS1:
 - AS3 *promises* it will forward datagrams towards that prefix
 - AS3 can aggregate prefixes in its advertisement

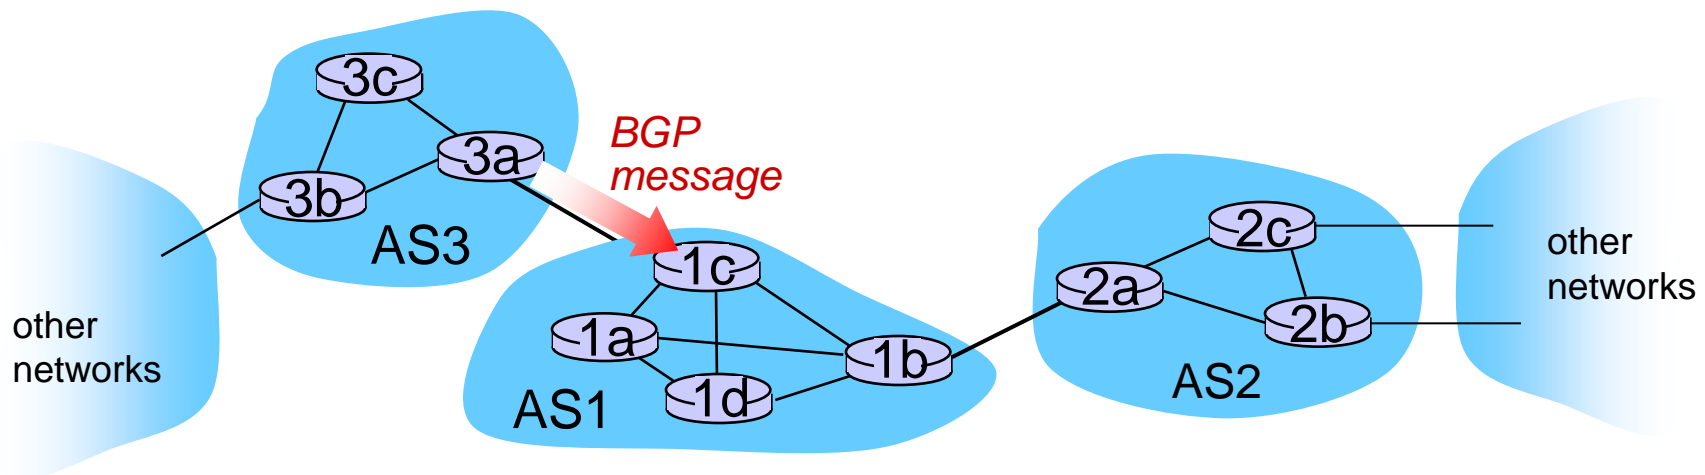

BGP basics: distributing path information

- ❖ using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
 - 1c can then use iBGP to distribute new prefix info to all routers in AS1
 - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- ❖ when router learns of new prefix, it creates entry for prefix in its forwarding table.

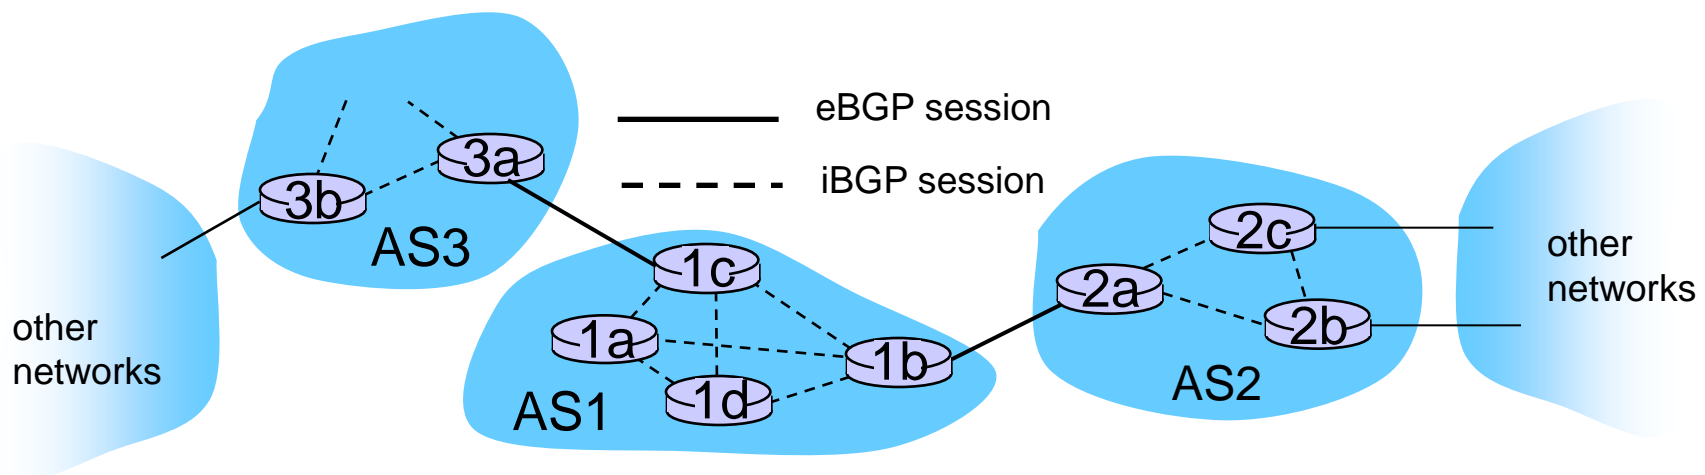

Path attributes and BGP routes

- ❖ advertised prefix includes BGP attributes
 - prefix + attributes = “route”
- ❖ two important attributes:
 - **AS-PATH**: contains ASs through which prefix advertisement has passed: e.g., AS 67, AS 17
 - **NEXT-HOP**: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- ❖ gateway router receiving route advertisement uses **import policy** to accept/decline
 - e.g., never route through AS x
 - *policy-based* routing

BGP route selection

- ❖ router may learn about more than 1 route to destination AS, selects route based on:
 1. local preference value attribute: policy decision
 2. shortest AS-PATH
 3. closest NEXT-HOP router: hot potato routing
 4. additional criteria

BGP messages


- ❖ BGP messages exchanged between peers over TCP connection
- ❖ BGP messages:
 - **OPEN:** opens TCP connection to peer and authenticates sender
 - **UPDATE:** advertises new path (or withdraws old)
 - **KEEPALIVE:** keeps connection alive in absence of UPDATES; also ACKs OPEN request
 - **NOTIFICATION:** reports errors in previous msg; also used to close connection

Putting it Altogether:

How Does an Entry Get Into a Router 's Forwarding Table?

- ❖ Answer is complicated!
- ❖ Ties together hierarchical routing (Section 4.5.3) with BGP (4.6.3) and OSPF (4.6.2).
- ❖ Provides nice overview of BGP!

How does entry get in forwarding table?

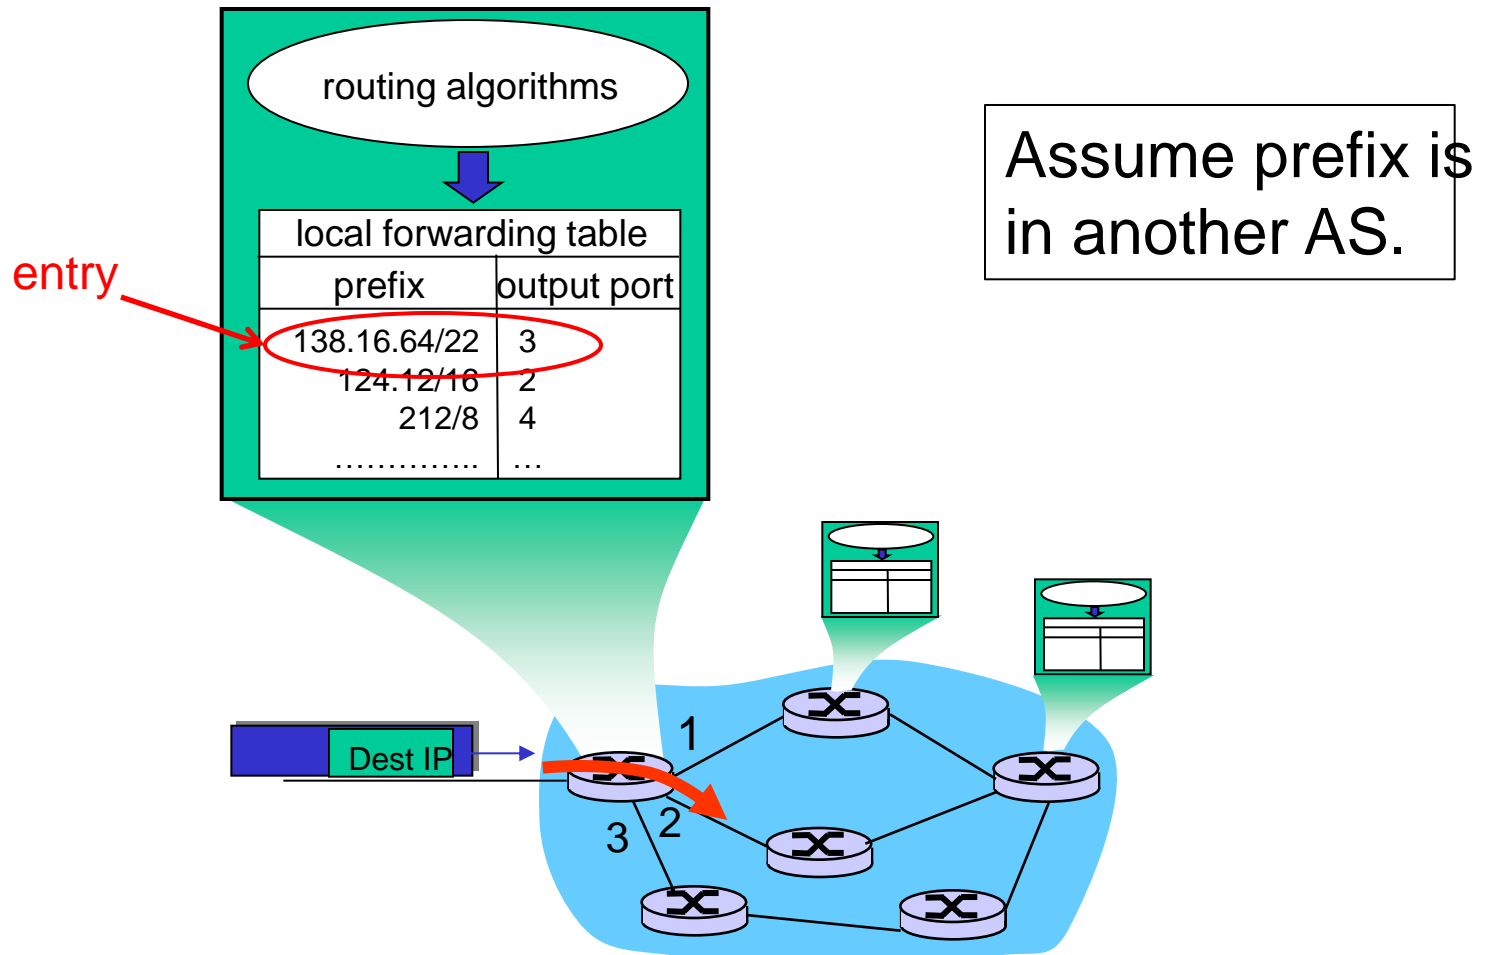


How does entry get in forwarding table?

High-level overview


1. Router becomes aware of prefix
2. Router determines output port for prefix
3. Router enters prefix-port in forwarding table

Router becomes aware of prefix

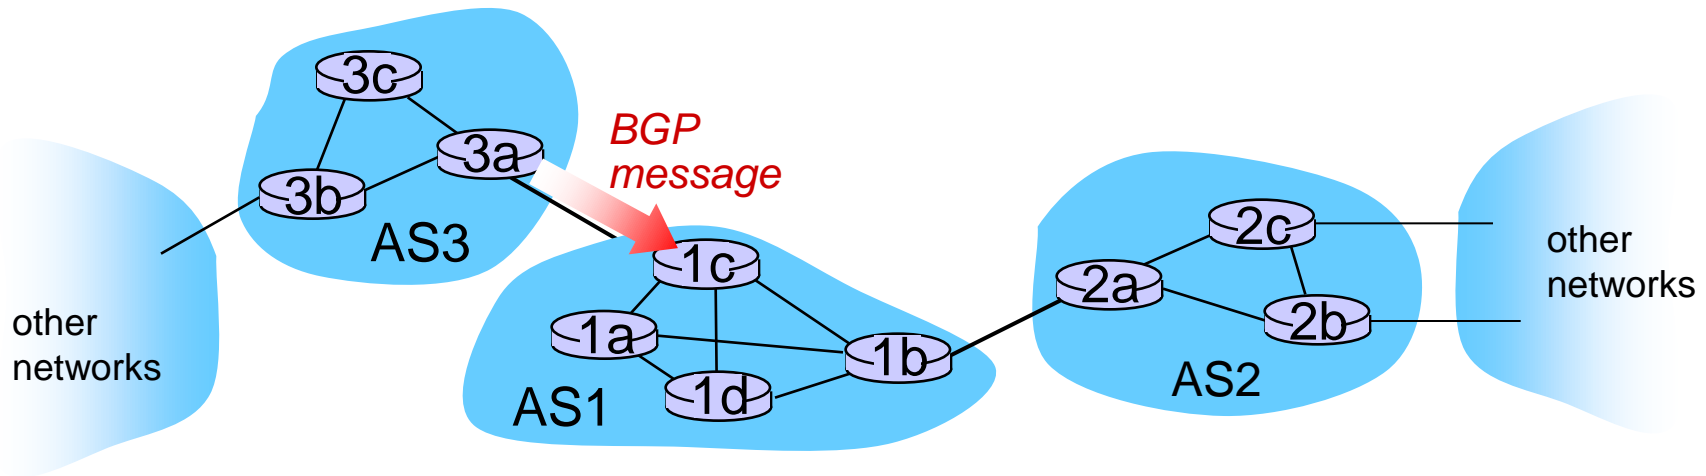

- ❖ BGP message contains “routes”
- ❖ “route” is a prefix and attributes: AS-PATH, NEXT-HOP,...
- ❖ Example: route:
 - ❖ Prefix: 138.16.64/22 ; AS-PATH: AS3 AS131 ; NEXT-HOP: 201.44.13.125

Router may receive multiple routes

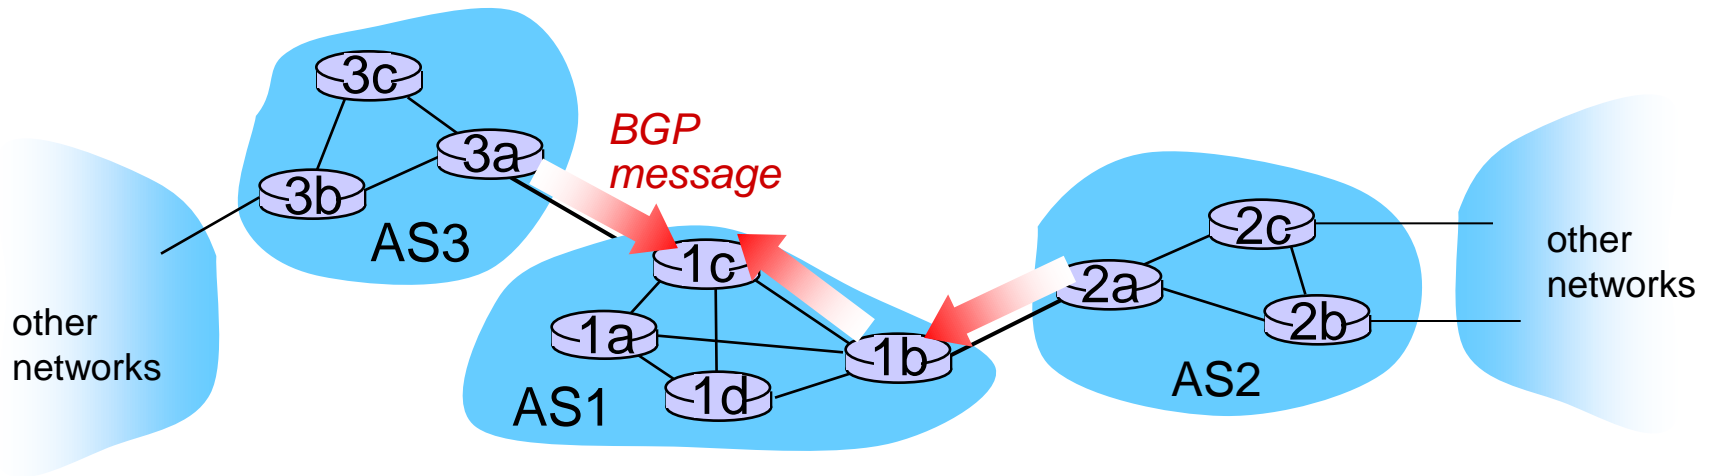

- ❖ Router may receive multiple routes for same prefix
- ❖ Has to select one route

Select best BGP route to prefix

- ❖ Router selects route based on shortest AS-PATH

- ❖ Example:

- ❖ AS2 AS17 to 138.16.64/22


select

- ❖ AS3 AS131 AS201 to 138.16.64/22

- ❖ What if there is a tie? We'll come back to that!


Find best intra-route to BGP route

- ❖ Use selected route's NEXT-HOP attribute
 - Route's NEXT-HOP attribute is the IP address of the router interface that begins the AS PATH.
- ❖ Example:
 - ❖ AS-PATH: AS2 AS17 ; NEXT-HOP: 111.99.86.55
- ❖ Router uses OSPF to find shortest path from 1c to 111.99.86.55

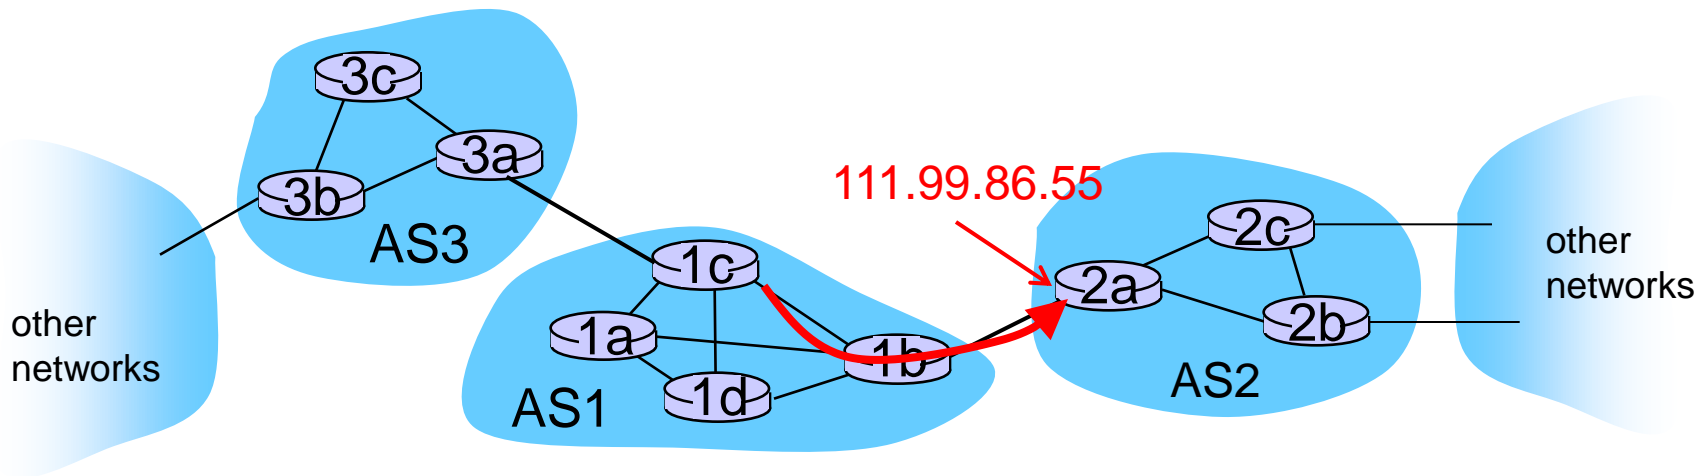


Router identifies port for route

- ❖ Identifies port along the OSPF shortest path
- ❖ Adds prefix-port entry to its forwarding table:
 - (138.16.64/22 , port 4)

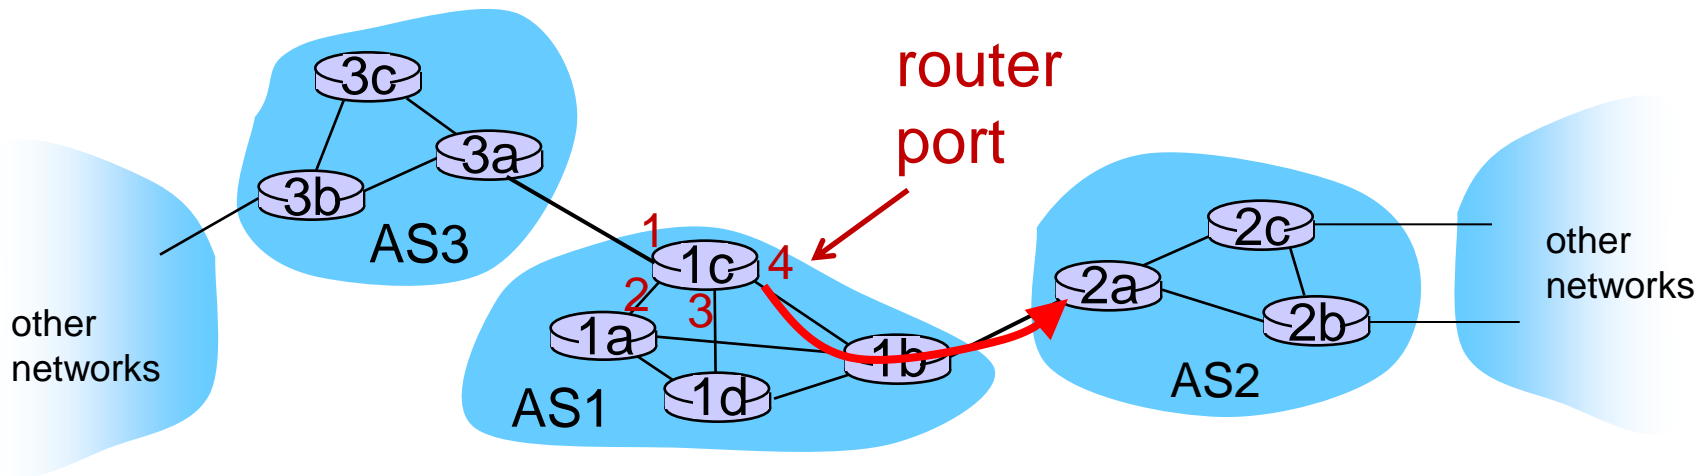

Hot Potato Routing

- ❖ Suppose there two or more best inter-routes.
- ❖ Then choose route with closest NEXT-HOP
 - Use OSPF to determine which gateway is closest
 - Q: From 1c, chose AS3 AS131 or AS2 AS17?
 - A: route AS3 AS201 since it is closer

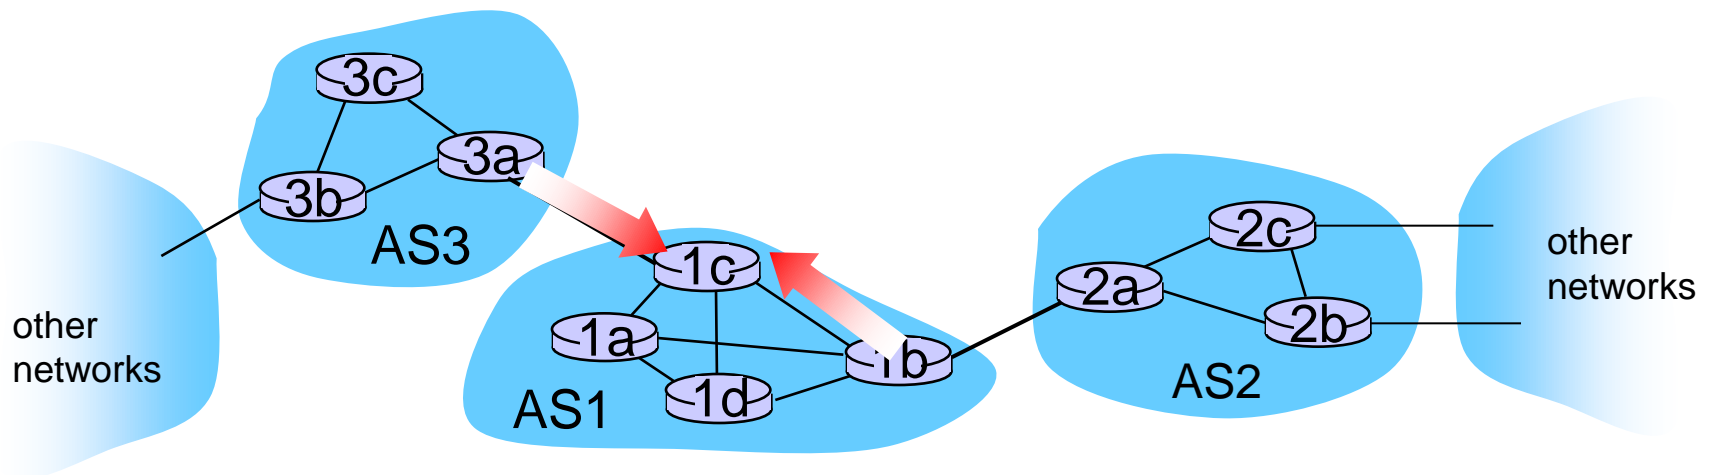


How does entry get in forwarding table?

Summary

1. Router becomes aware of prefix
 - via BGP route advertisements from other routers
2. Determine router output port for prefix
 - Use BGP route selection to find best inter-AS route
 - Use OSPF to find best intra-AS route leading to best inter-AS route
 - Router identifies router port for that best route
3. Enter prefix-port entry in forwarding table

BGP routing policy

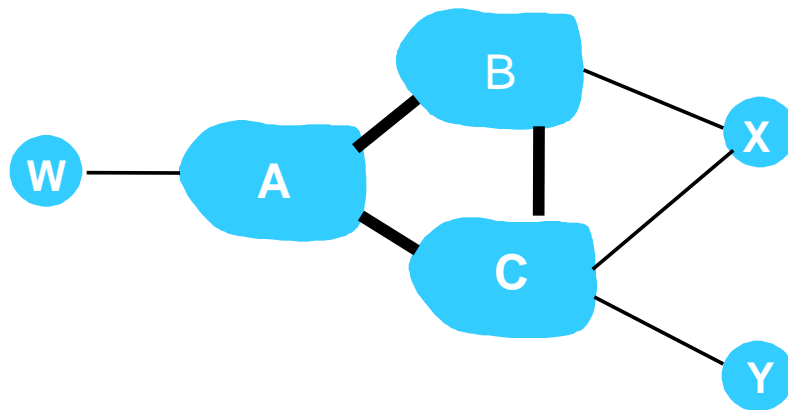




legend:  provider network

 customer network:

- ❖ A,B,C are *provider networks*
- ❖ X,W,Y are customer (of provider networks)
- ❖ X is *dual-homed*: attached to two networks
 - X does not want to route from B via X to C
 - .. so X will not advertise to B a route to C

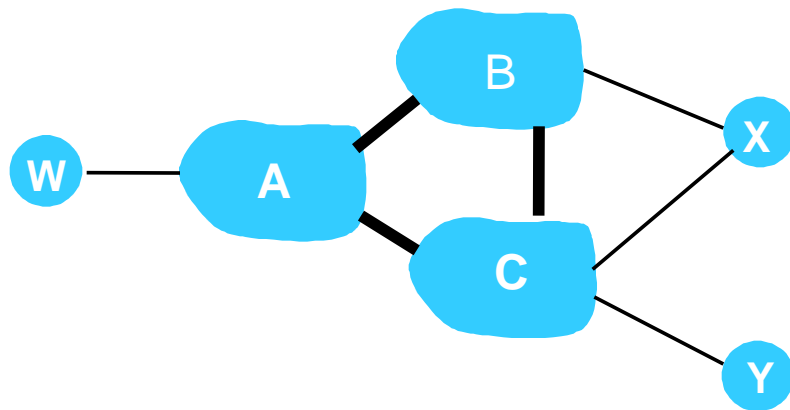BGP routing policy (2)



legend:  provider network
 customer network:

- ❖ A advertises path AW to B
- ❖ B advertises path BAW to X
- ❖ Should B advertise path BAW to C?
 - No way! B gets no “revenue” for routing CBAW since neither W nor C are B’s customers
 - B wants to force C to route to w via A
 - B wants to route *only* to/from its customers!

Why different Intra-, Inter-AS routing ?

policy:

- ❖ inter-AS: admin wants control over how its traffic routed, who routes through its net.
- ❖ intra-AS: single admin, so no policy decisions needed

scale:

- ❖ hierarchical routing saves table size, reduced update traffic

performance:

- ❖ intra-AS: can focus on performance
- ❖ inter-AS: policy may dominate over performance