




MCU

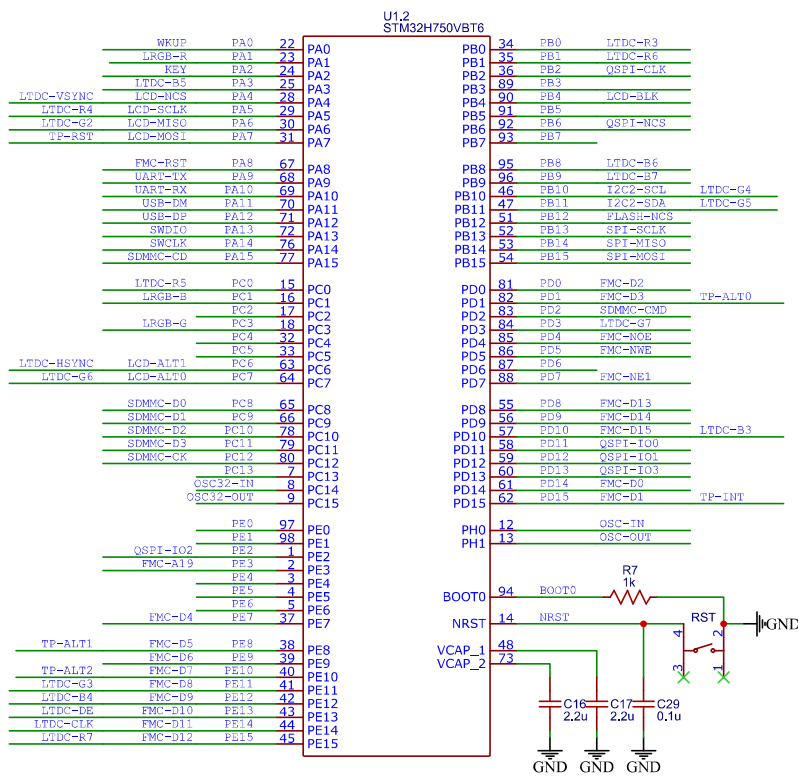


供电

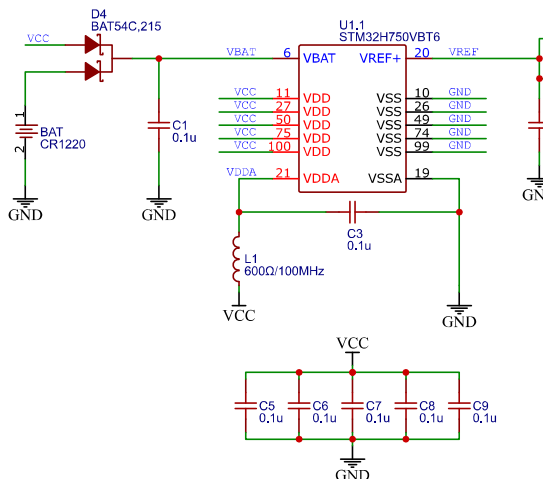


晶振

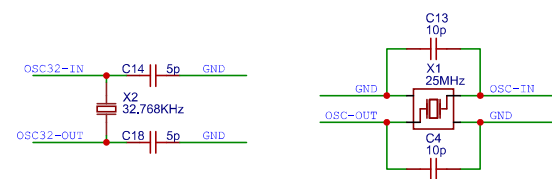


QSPI NOR-Flash

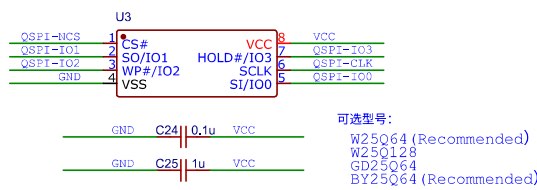

USB电路

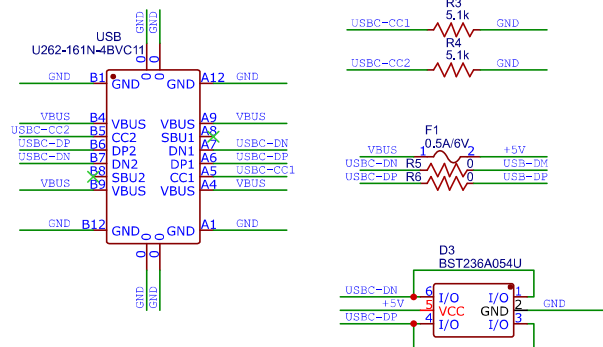

SPI NOR-Flash

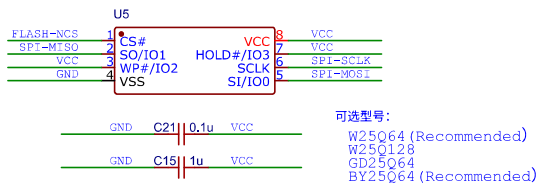

LTDC接口
适配正点原子RGB屏

Pin 1: +5V
Pin 2: +5V
Pin 3: GND
Pin 4: GND
Pin 5: LTDC-R3
Pin 6: LTDC-R4
Pin 7: LTDC-R5
Pin 8: LTDC-R6
Pin 9: LTDC-R7
Pin 10: GND
Pin 11: GND
Pin 12: GND
Pin 13: LTDC-G2
Pin 14: LTDC-G3
Pin 15: LTDC-G4
Pin 16: LTDC-G5
Pin 17: LTDC-G6
Pin 18: LTDC-G7
Pin 19: GND
Pin 20: GND
Pin 21: GND
Pin 22: GND
Pin 23: LTDC-B3
Pin 24: LTDC-B4
Pin 25: LTDC-B5
Pin 26: LTDC-B6
Pin 27: LTDC-B7
Pin 28: GND
Pin 29: LTDC-CLK
Pin 30: LTDC-RSYNC
Pin 31: LTDC-VSYNC
Pin 32: LTDC-DE
Pin 33: LCD-BLK
Pin 34: TP-RST
Pin 35: TP-ALT2
Pin 36: TP-ALT1
Pin 37: TP-ALT0
Pin 38: TP-ENT
Pin 39: FMC-RST
Pin 40: GND

RGB-LCD
X05A20L40T

USB串口

The diagram illustrates a USB-to-UART interface circuit. It features a CH340C chip (U6) which acts as a USB-to-UART bridge. The USB side is connected to a USB cable through a series of resistors (R20, R21, R22, R23, R24, R25) and capacitors (C12, C22). The UART side is connected to a UART module (U262-161N-4BVC11) through resistors R19 and R20. The CH340C is powered by VCC and GND. The UART module is also powered by VCC and GND. The CH340C pinout is shown on the right, with pins 1 through 16 labeled. The UART module pinout is shown on the left, with pins 1 through 16 labeled.

IO引出			
TITLE: STM32H750小型开发板-IO Company: Your Company Date: 2021-10-30		REV: 1.2 Sheet: 1/1	
		Drawn By: micespring	