



FRONT VIEW

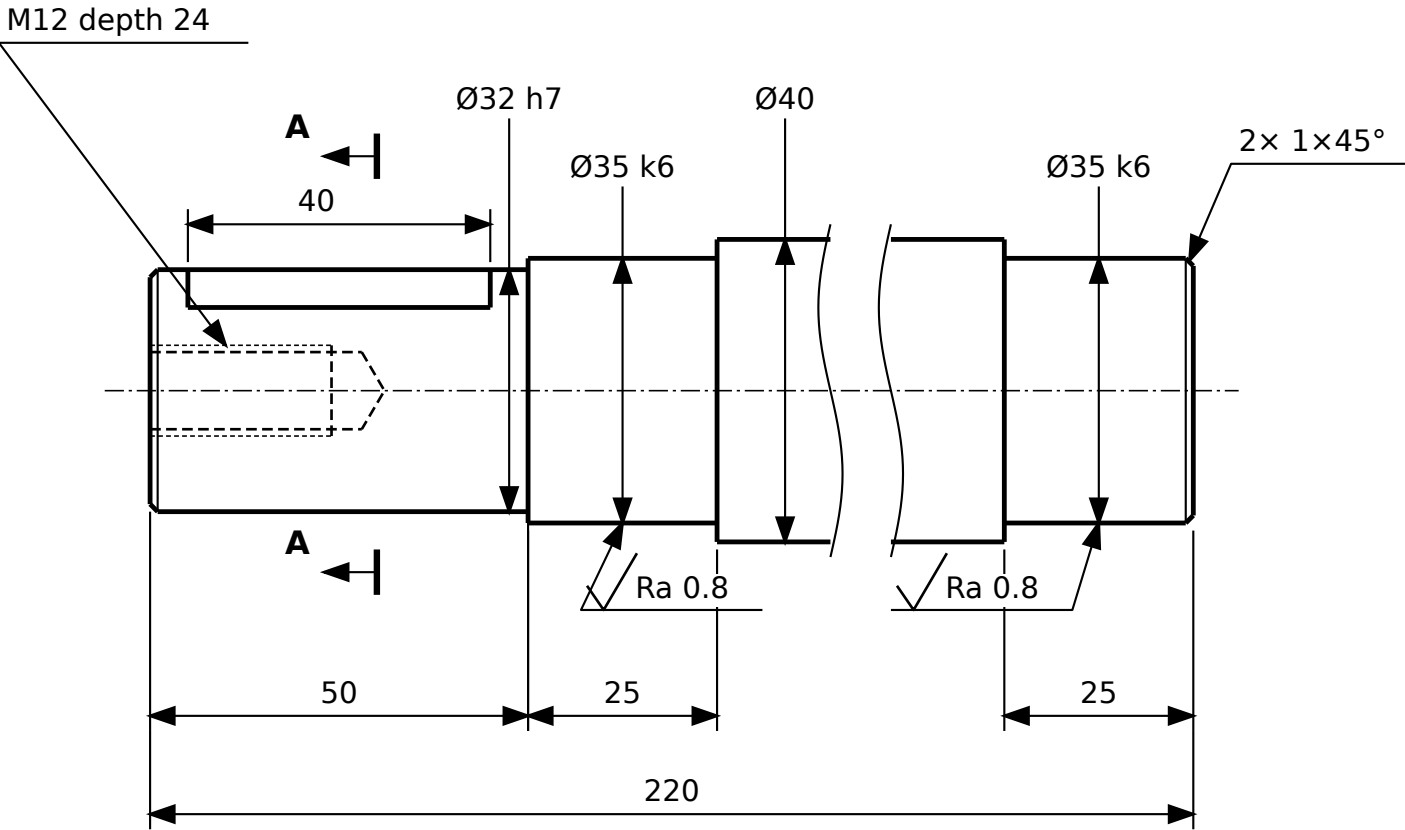

SECTION A-A (2:1)

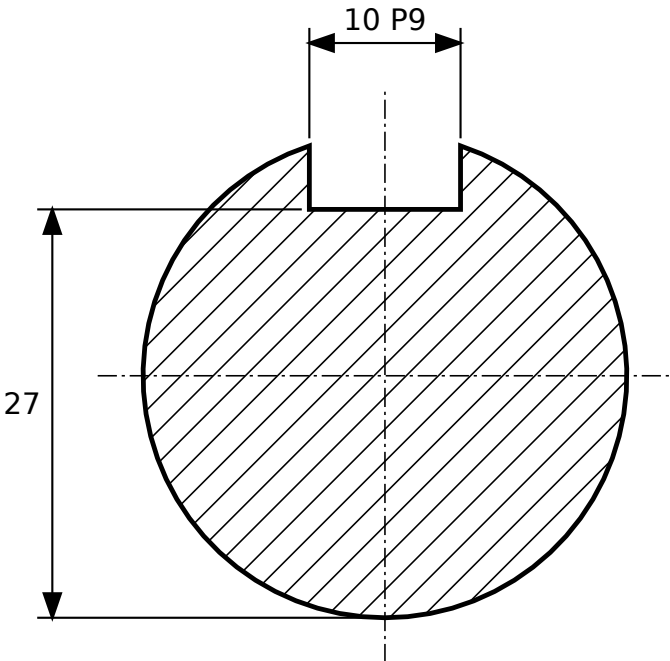

TECHNICAL REQUIREMENTS / NOTES

1. Heat treatment: QT 28-32 HRC.
2. Bearing seats Ø35 k6: runout 0.01 to common axis.
3. Break all sharp edges 0.2-0.5.
4. Centre holes DIN 332-D permitted.

Company		Title		
Hallvig Fördertechnik GmbH		Output Shaft		
Part number		Rev.	Material	
SH-4711		B	42CrMo4+QT	
General tolerance	Surface	Scale	Units	Sheet
ISO 2768-mK	Ra 3.2	1:1	mm	1 / 1
Drawn	Date	Checked	Format	
K. Lindqvist	2026-08-12	-	A3	