
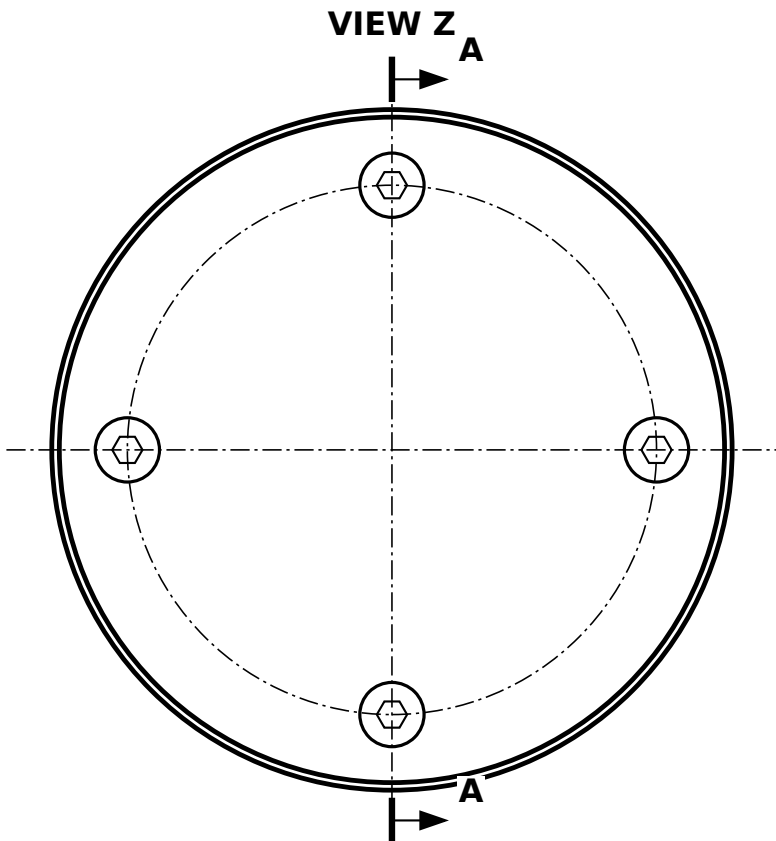


SECTION A-A

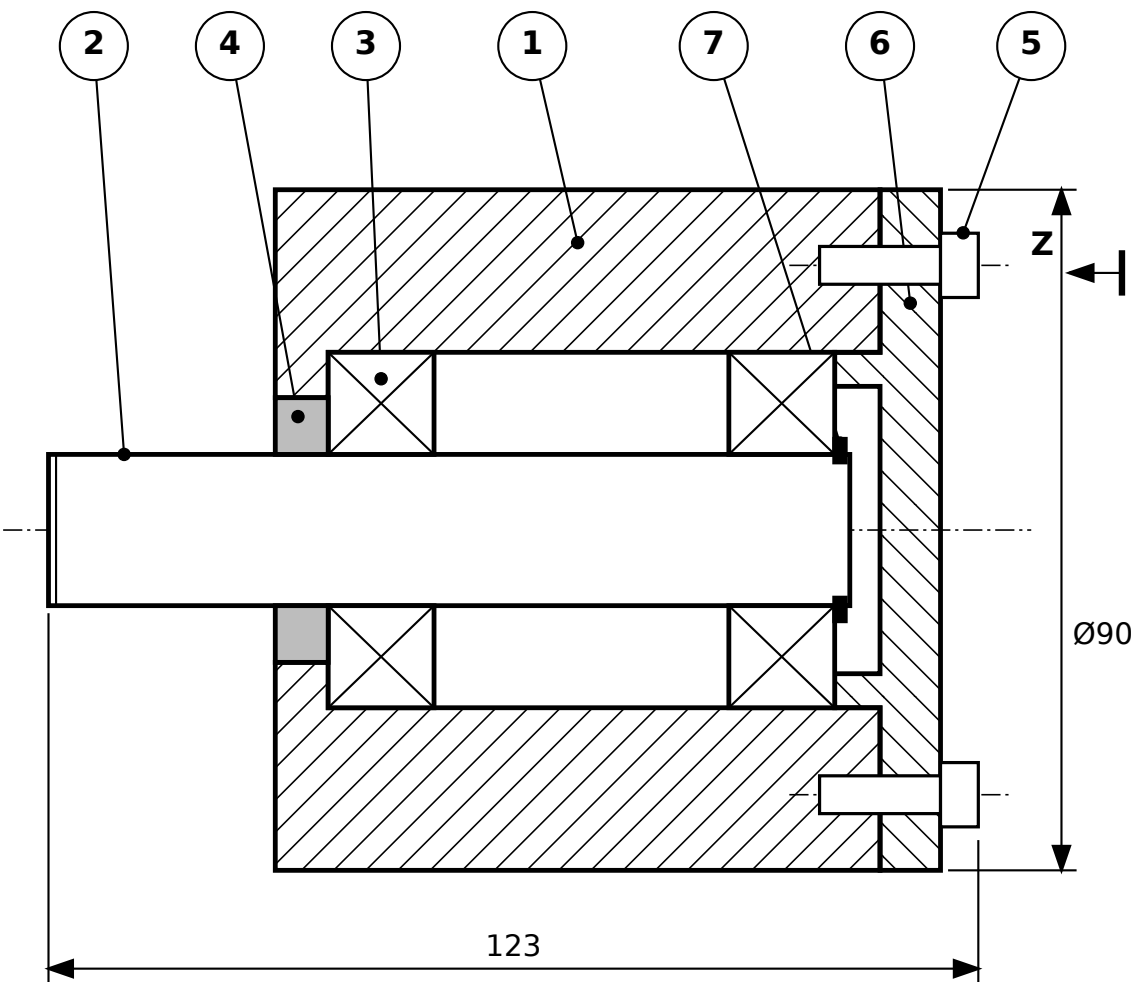

TECHNICAL REQUIREMENTS / NOTES

1. Tightening torque pos. 5: 6 Nm, secure with medium-strength threadlocker.
2. Bearings pos. 3 pre-greased; fill seal lip pos. 4 with grease before assembly.
3. Shaft must rotate freely by hand after assembly; 100 % functional test.

PARTS LIST

Pos.	Qty	Part number	Description	Standard	Material
1	1	HS-5101	Gehäuse		EN-GJS-500-7
2	1	SH-5102	Welle		C45
3	2	6204-2RS	Rillenkugellager 20×47×14	DIN 625	
4	1		Wellendichtring 20×35×7 NBR	DIN 3760	
5	4		Zylinderschraube M5×16-8.8	ISO 4762	
6	1	EC-5103	Enddeckel		EN AW-6082 T6
7	1		Sicherungsring 20×1.2	DIN 471	

Company			Title		
Veltrum Aktorik GmbH			Actuator Sub-Assembly		
Part number		Rev.	Material		
ASM-5100		C	see parts list		
General tolerance		Surface	Scale	Units	Sheet
ISO 2768-mK		-	1:1	mm	1 / 1
Drawn		Date	Checked		Format
M. Hollerbeck		2026-09-08	-		A3