


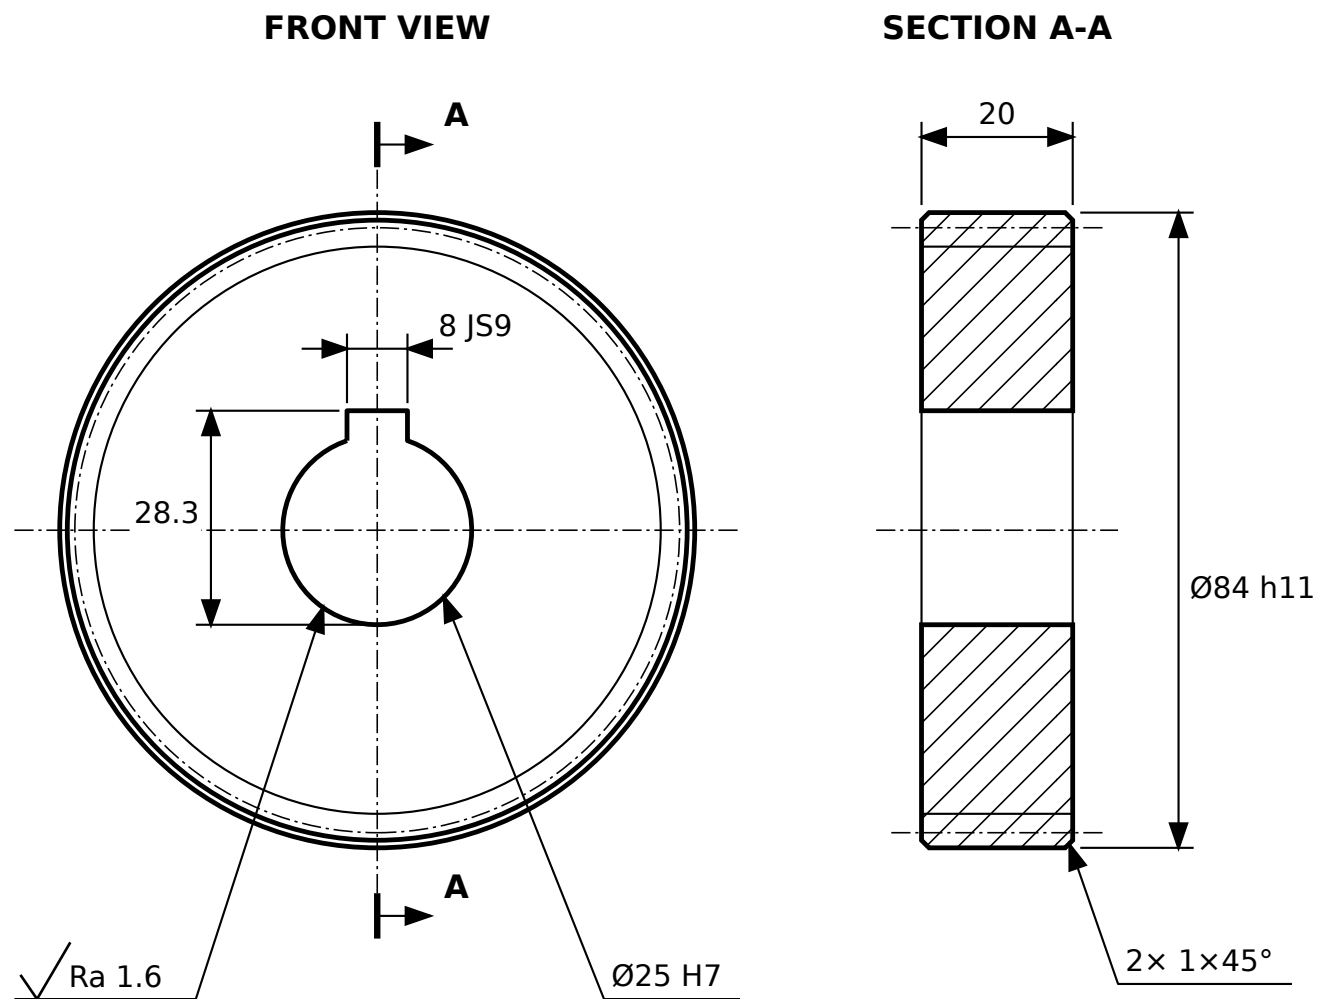

GEAR DATA

Module	$m = 2$
Number of teeth	$z = 40$
Pressure angle	$\alpha = 20^\circ$
Pitch diameter	$d = 80$
Face width	$b = 20$
Accuracy	ISO 1328-1 grade 7

TECHNICAL REQUIREMENTS / NOTES

- Heat treatment: case hardened 58-62 HRC, CHD 0.6-0.9 mm.
- Bore and faces ground after hardening.
- Break all sharp edges 0.2-0.5.

Company		Title		
Kartano Getriebebau GmbH		Spur Gear		
Part number		Rev.	Material	
GR-3340		A	16MnCr5	
General tolerance	Surface	Scale	Units	Sheet
ISO 2768-mK	Ra 3.2	1:1	mm	1 / 1
Drawn	Date	Checked	Format	
P. Wendholt	2026-06-17	-	A3	