


VIEW X (1:1)

SECTION A-A

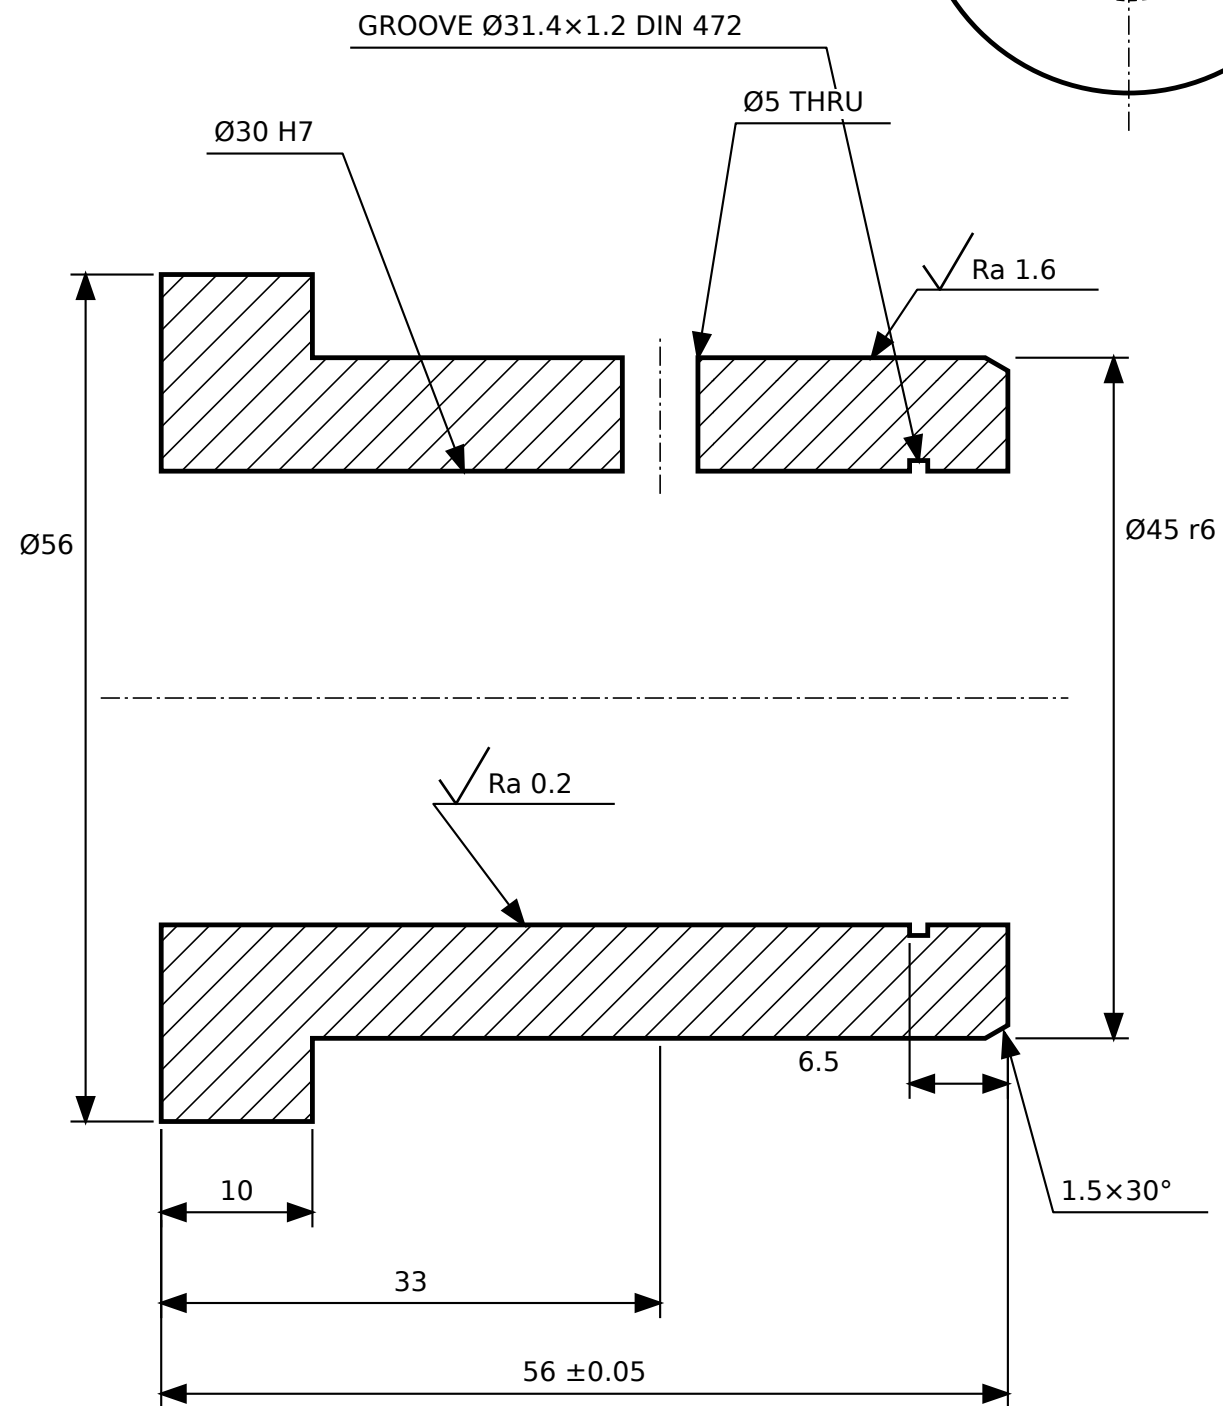

NOTES

1. Surface treatment: passivated, free of iron contamination.
2. Bore Ø30 H7: cylindricity 0.005, honed.
3. Ø45 r6 coaxial to bore within 0.02.
4. Deburr the cross hole inside the bore.

Drawing No.	Issue	Scale	Unit	Sheet
BS-60218	02	2:1	mm	1 of 1
Description			Customer	
Flanged Guide Bushing			Brenntal Hydraulik AG	
Material		Tolerances unless stated		Finish
X5CrNi18-10 (1.4301)		ISO 2768-fK		Ra 3.2
Drawn	Date		Approved	Size
T. Aaltonen	03.07.2026		-	A3