


R4 and R6 should be matched.
R7 and R8 should be matched.

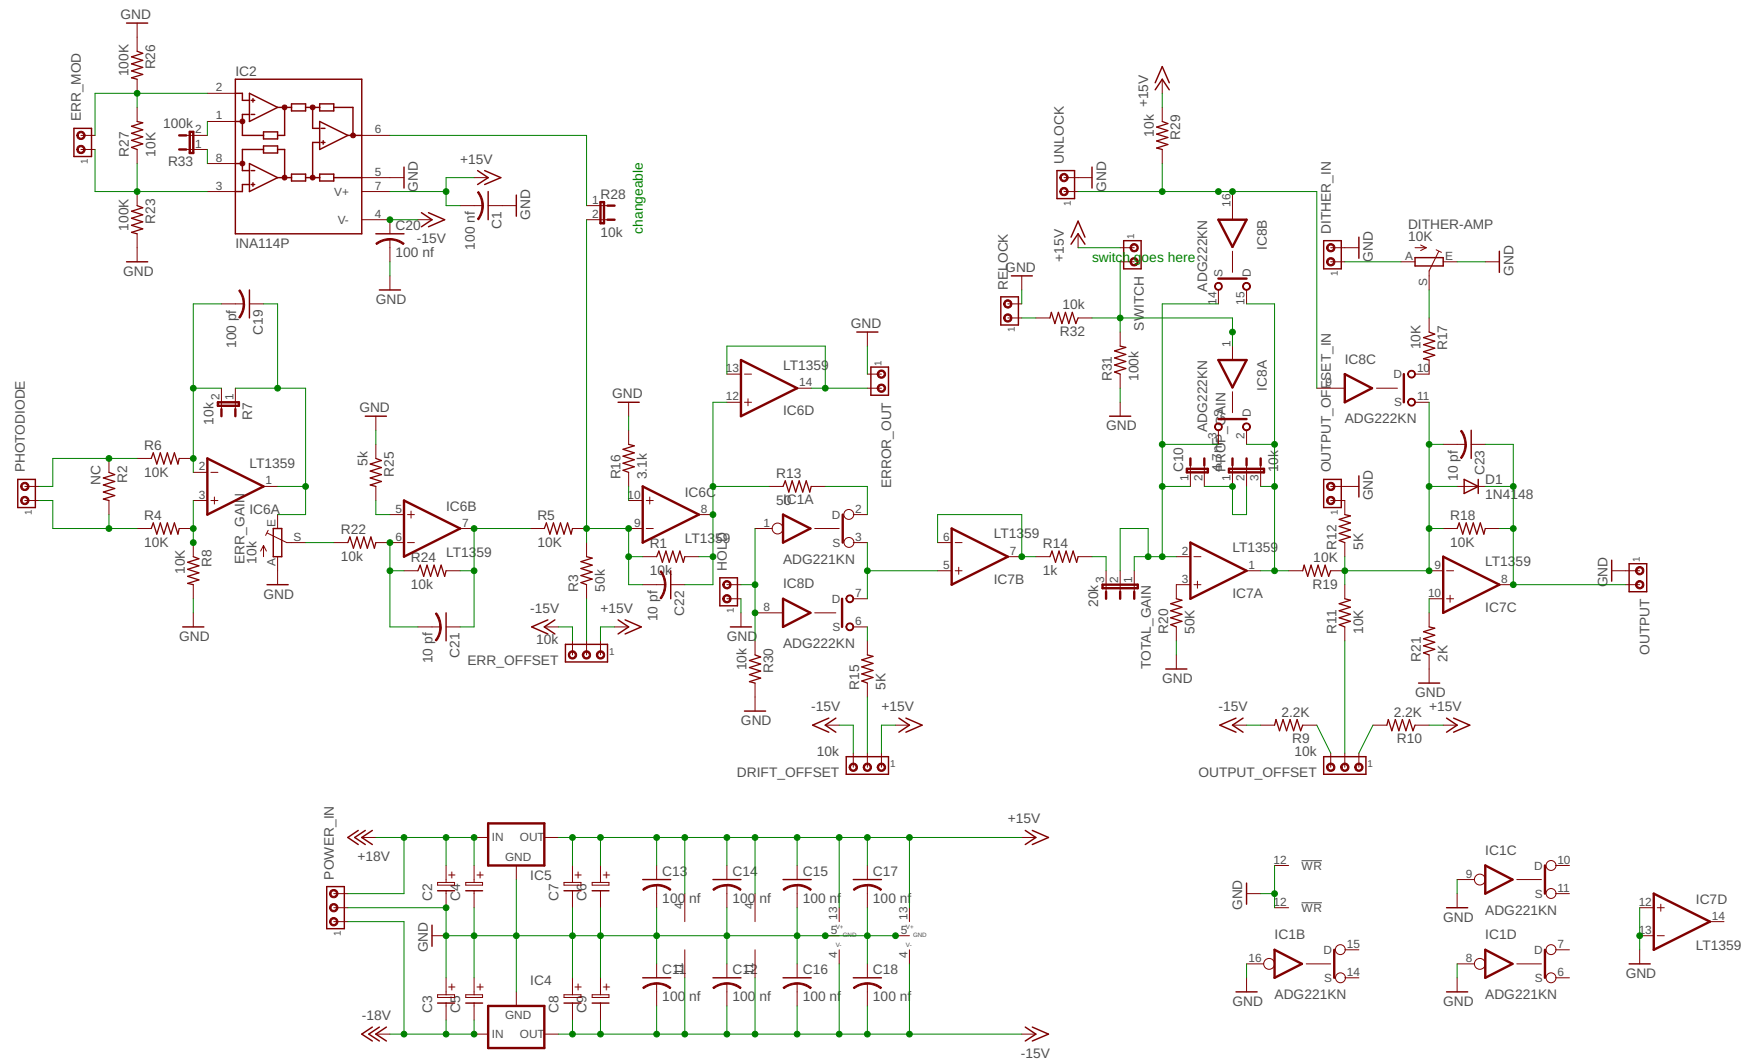

Each regulator should have two large ceramic capacitors for high frequencies and two large (about 1uF or larger) electrolytic or tantalum capacitors for large low frequency swings in load. One of each of these should be on each side of the regulator