

**QXKJ-1007 CAT6A / CAT6 / CAT5E UTP Toolless Keystone Jack**

**APPLICATION**

The QXKJ-1007 UTP toolless keystone jack is designed for structured cabling outlets, unloaded patch panels and modular wall plate applications where RJ45 copper connectivity is required. The family supports CAT6A, CAT6 and CAT5E model selection for project installation, distributor inventory and private-label sourcing.



**SPECIFICATION**

The jack shall be supplied as a UTP toolless RJ45 keystone module with source-listed CAT6A, CAT6 and CAT5E grade options. Termination shall use a toolless IDC structure. Source-imported electrical values include 1.5 Amps current rating, insulation resistance of at least 500 MOhm, contact resistance of no more than 10 mOhm and DC resistance of no more than 0.1 Ohm.

Physical construction shall use high-impact flame-retardant plastic listed as UL 94V-0 rated in source text, FR-4 PCB at 1.2 mm thickness, phosphor bronze jack wire with gold over nickel plating and tin-plated phosphor bronze IDC conductor. Certificate files and final market approvals remain confirmation needed before public claim use.

**FEATURES & BENEFITS**

- Toolless IDC termination for installation without a punch-down tool.
- One product family covers CAT6A, CAT6 and CAT5E purchasing choices.
- Accommodates 26 to 23 AWG solid conductors.
- Plug insertion life source-listed at at least 750 cycles with FCC compliant RJ45 plug.
- Plug retention force source-listed at at least 11 lbf.
- FR-4 PCB and phosphor bronze contact construction are listed in the imported source data.
- Private-label requirements can be quoted by grade, logo, carton mark and package plan.
- Final certificate and packaging claims are held for human confirmation before publishing.

**DESIGN CONSIDERATIONS**

- Use with compatible unloaded wall plates, modular outlets or patch panels after fit confirmation.
- Confirm CAT6A, CAT6 or CAT5E grade requirement before quotation.
- Confirm target country, certificate file and buyer type before making compliance claims.

**STANDARDS & REGULATIONS**

- ANSI/TIA-568-C.2 source-listed
- ISO/IEC 11801:2002/Amd.2:2010 source-listed
- YD/T 926.3-2009 source-listed
- ISO/IEC 60603-7 compliant in source text
- RoHS directive 2002/95/EC compliant in source text
- Third-party certificate PDFs: confirmation needed

**COUNTRY OF ORIGIN**

Confirmation needed

QXKJ-1007

PRODUCT SPECIFICATIONS  
QXKJ-1007


PRIVATE LABEL  
Network Connectivity

MECHANICAL SPECIFICATIONS

|                    |                                                                                                                                                                                                                                                                                    |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions:        | Confirmation needed                                                                                                                                                                                                                                                                |
| Materials:         | <b>Plastic Parts:</b> High-impact flame-retardant plastic, UL 94V-0 rated in source text.<br><br><b>PCB:</b> FR-4, 1.2 mm thickness.<br><br><b>Jack Wire:</b> 0.35 mm phosphor bronze, gold over nickel plating.<br><br><b>IDC Conductor:</b> 0.5 mm phosphor bronze, tin-plating. |
| Temp. (Storage):   | -40 deg C to 68 deg C                                                                                                                                                                                                                                                              |
| Temp. (Operating): | -10 deg C to 60 deg C                                                                                                                                                                                                                                                              |
| Humidity:          | 10% to 90% RH                                                                                                                                                                                                                                                                      |
| Durability:        | 200 termination cycles                                                                                                                                                                                                                                                             |

WARRANTY INFORMATION

Warranty terms, support region and private-label responsibility are confirmation needed before publication.

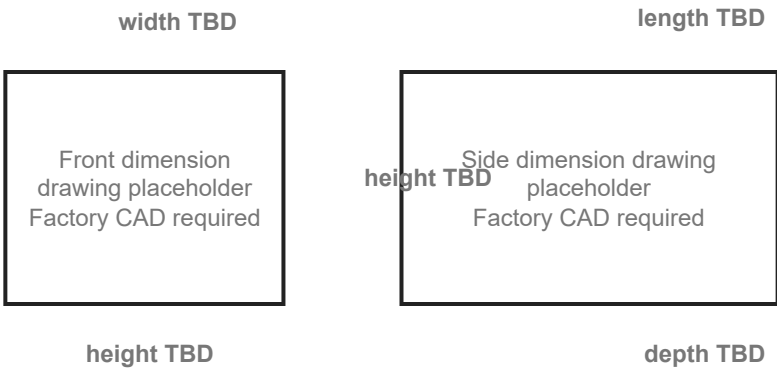

QXKJ-1007

| PART NUMBER                                 |                     |                     |                                                      |               |
|---------------------------------------------|---------------------|---------------------|------------------------------------------------------|---------------|
| Description                                 | Single Item         | Bulk Pack           | Private Label Pack                                   | Review Status |
| QXKJ-1007 UTP Toolless Keystone Jack, CAT6A | QXKJ-1007C6A        | Confirmation needed | Available after logo and carton review               | Source-listed |
| QXKJ-1007 UTP Toolless Keystone Jack, CAT6  | QXKJ-1007C6         | Confirmation needed | Available after logo and carton review               | Source-listed |
| QXKJ-1007 UTP Toolless Keystone Jack, CAT5E | QXKJ-1007C5E        | Confirmation needed | Available after logo and carton review               | Source-listed |
| Color options                               | Confirmation needed | Confirmation needed | Color label can be mapped after factory confirmation | Open item     |

For further support information, contact the sales or engineering review owner after the product facts are confirmed.

|                                                                                                                  |                                                             |                                                                 |                                                         |                                                           |                                                                        |
|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------------------|
| <b>China</b><br>Factory and export contact confirmation needed                                                   | <b>Asia Pacific</b><br>Regional contact confirmation needed | <b>North America</b><br>Distributor contact confirmation needed | <b>Europe</b><br>Compliance contact confirmation needed | <b>Latin America</b><br>Sales contact confirmation needed | <b>Middle East &amp; Africa</b><br>Project contact confirmation needed |
| PRODUCTS CAN BE PREPARED FOR GLOBAL REVIEW AFTER CERTIFICATES, PACKAGING AND COUNTRY REQUIREMENTS ARE CONFIRMED. |                                                             |                                                                 |                                                         |                                                           |                                                                        |