

```
Router#
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int e0/0
Router(config-if)#ip add 50.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#
Router(config)#
Router(config)#int e0/1
Router(config-if)#ip add 60.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#
*Aug 23 04:39:25.839: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
Router(config-if)#exit
Router(config)#
Router(config)#
```


Local Area Connection Properties

General Advanced

Internet Protocol (TCP/IP) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically☒ Use the following IP address:

IP address: 50 . 0 . 0 . 10

Subnet mask: 255 . 0 . 0 . 0

Default gateway: 50 . 0 . 0 . 1

☐ Obtain DNS server address automatically☒ Use the following DNS server addresses:

Preferred DNS server: . . .

Alternate DNS server: . . .

Advanced...

OK

Cancel

Connection Status

Connected

00:13:29

1.0 Gbps

Sent



Received

107


5

Disable

Close

Details

Local Area Connection

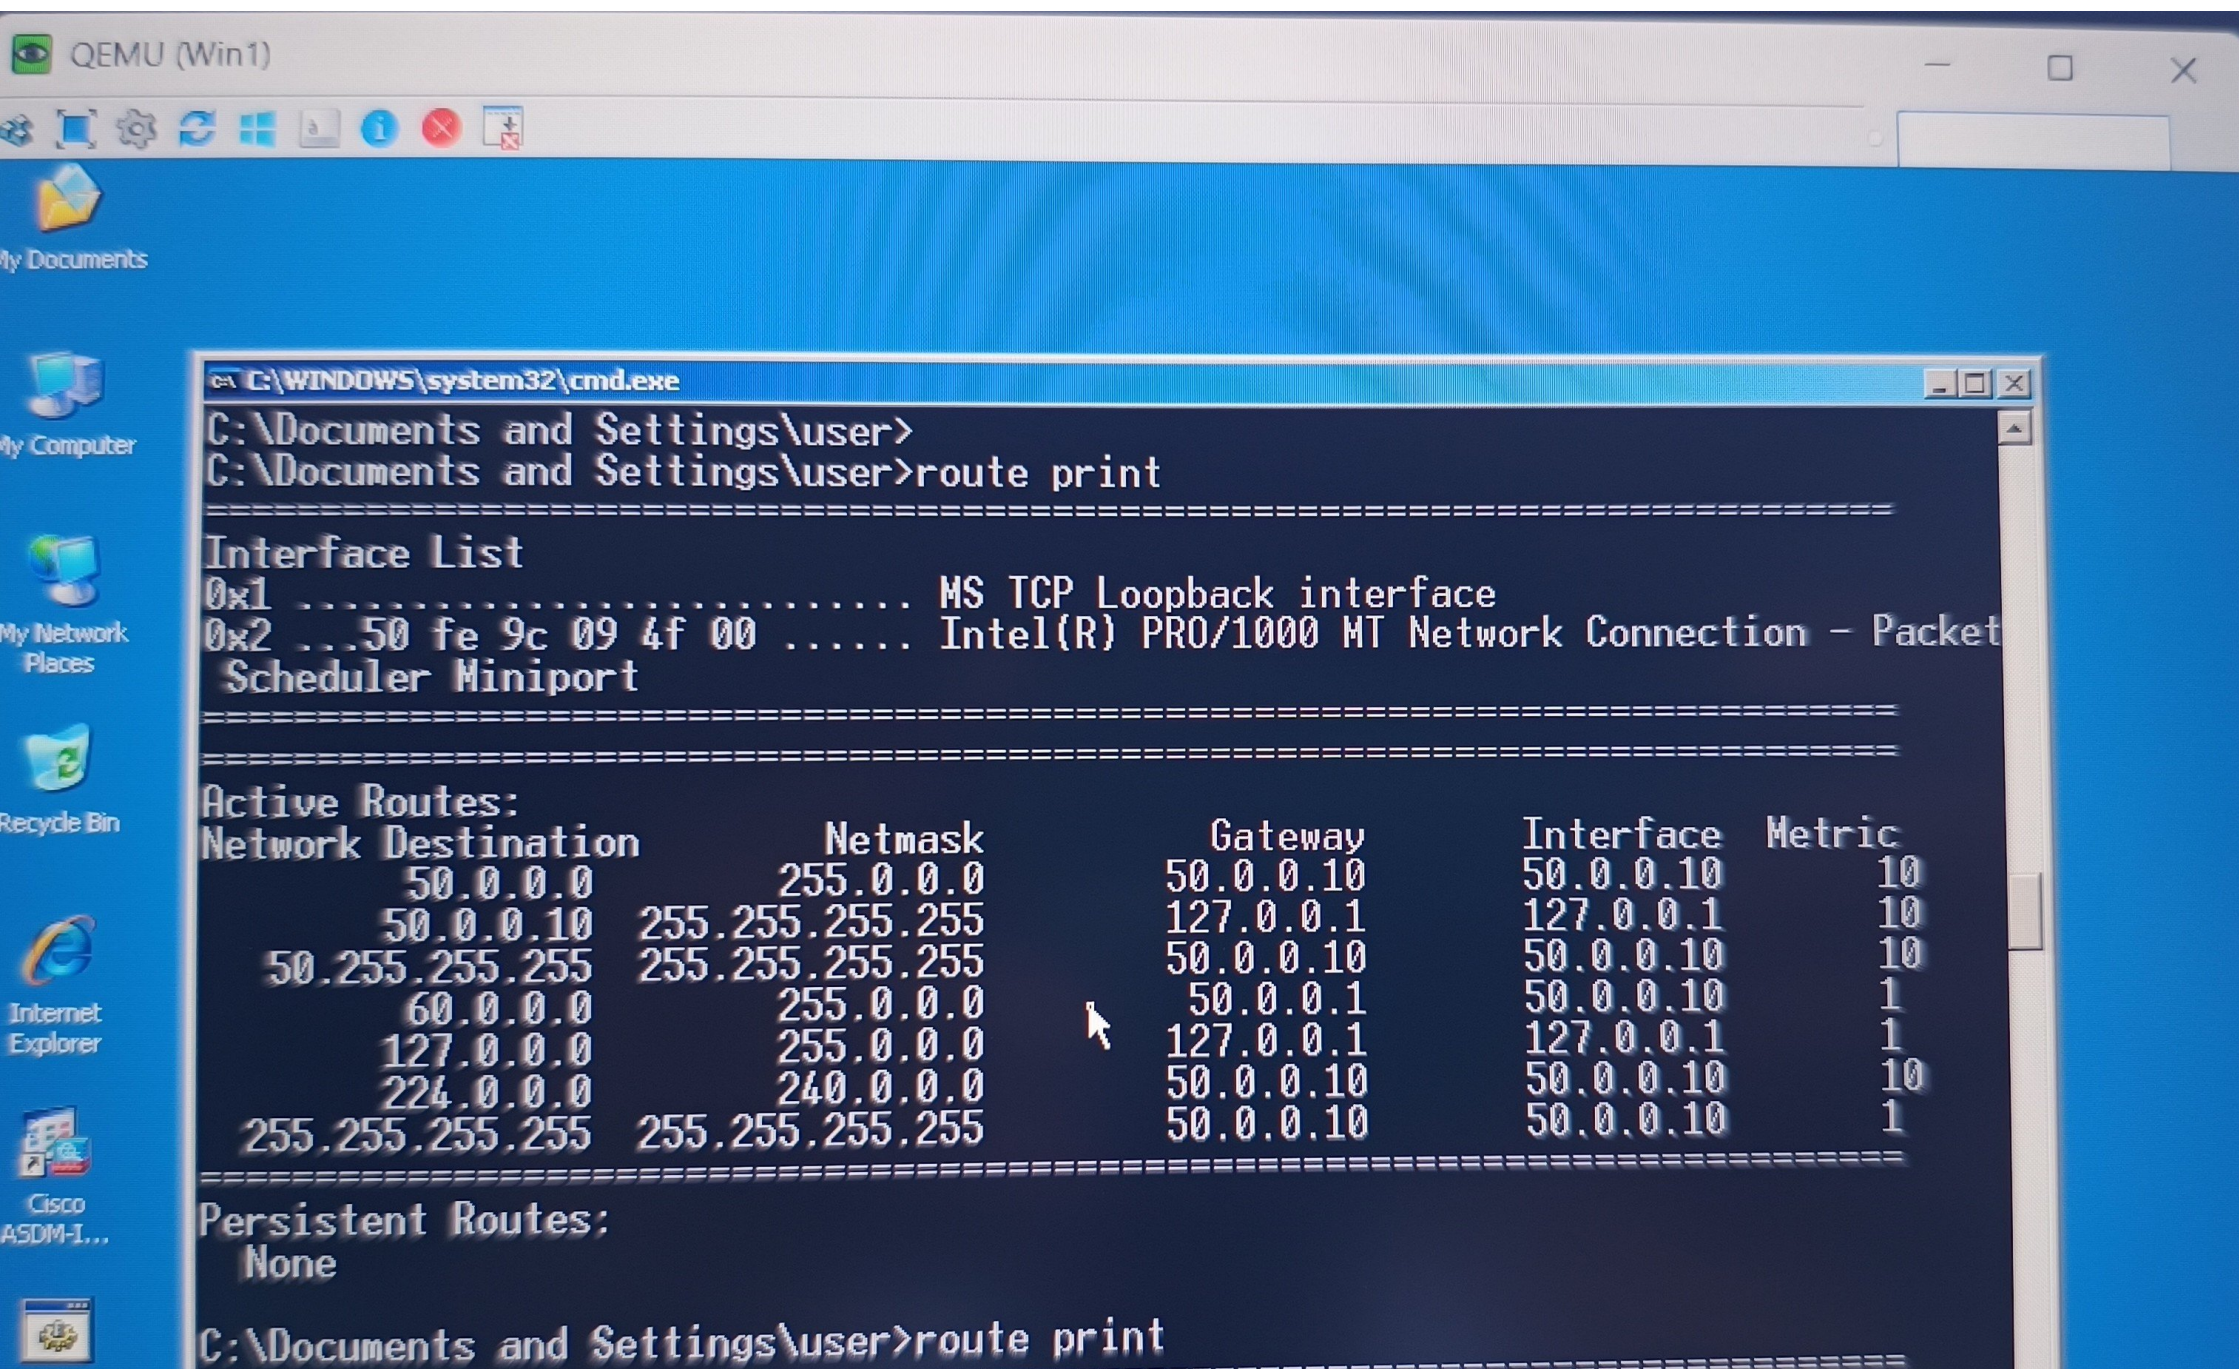

C:\WINDOWS\system32\cmd.exe

None

C:\Documents and Settings\user>route add 60.0.0.0 mask 255.0.0.0 50.0.0.1

C:\Documents and Settings\user>route print

Interface List

0x1 MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:

Network Destination	Netmask	Gateway	Interface	Metric
0.0.0.0	0.0.0.0	50.0.0.1	50.0.0.10	10
50.0.0.0	255.0.0.0	50.0.0.10	50.0.0.10	10
50.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
50.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	10
60.0.0.0	255.0.0.0	50.0.0.1	50.0.0.10	1
127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
224.0.0.0	240.0.0.0	50.0.0.10	50.0.0.10	10
255.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	1

Default Gateway: 50.0.0.1

Persistent Routes:

QEMU (Win2)



Local Area Connection Properties

General Advanced

Internet Protocol (TCP/IP) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address: 60 . 0 . 0 . 10

Subnet mask: 255 . 0 . 0 . 0

Default gateway: 60 . 0 . 0 . 1

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server: . . .

Alternate DNS server: . . .

Advanced...

OK

Cancel

Connection Status

Connected

00:36:06

1.0 Gbps

Sent

128



Received

9

Disable

Close

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>

C:\Documents and Settings\user>route print

=====

Interface List

0x1 MS TCP Loopback interface

0x2 ...50 86 5f 09 50 00 Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

=====

Active Routes:

Network Destination	Netmask	Gateway	Interface	Metric
60.0.0.0	255.0.0.0	60.0.0.10	60.0.0.10	10
60.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
60.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	10
127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
224.0.0.0	240.0.0.0	60.0.0.10	60.0.0.10	10
255.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	1

=====

Persistent Routes:

None

QEMU (Win2)

C:\WINDOWS\system32\cmd.exe

Persistent Routes:

None

C:\Documents and Settings\user>route add 50.0.0.0 mask 255.0.0.0 60.0.0.1

C:\Documents and Settings\user>route print

=====

Interface List

0x1 MS TCP Loopback interface

0x2 ...50 86 5f 09 50 00 Intel(R) PRO/1000 MT Network Connection - Packet

Scheduler Miniport

=====

Active Routes:

Network	Destination	Netmask	Gateway	Interface	Metric
	50.0.0.0	255.0.0.0	60.0.0.1	60.0.0.10	1
	60.0.0.0	255.0.0.0	60.0.0.10	60.0.0.10	10
	60.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
	60.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	10
	127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
	224.0.0.0	240.0.0.0	60.0.0.10	60.0.0.10	10
	255.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	1

=====

Persistent Routes:

None

C:\Documents and Settings\user>

QEMU (Win1)

C:\WINDOWS\system32\cmd.exe

Persistent Routes:
None

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>