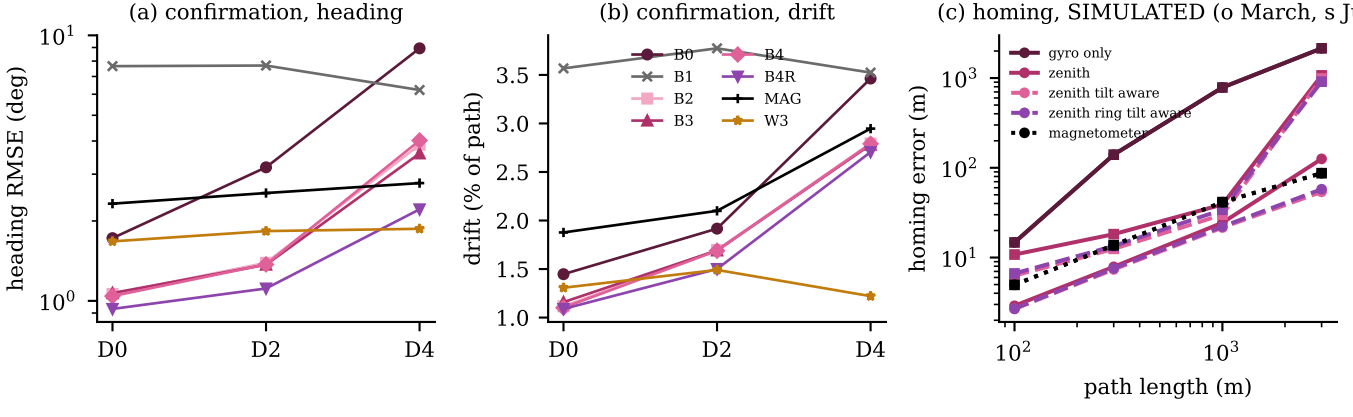
(a) confirmation, heading
heading RMSE (deg)
10^1
10^0
D0
D2
D4
(b) confirmation, drift
drift (% of path)
3.5
3.0
2.5
2.0
1.5
1.0
B0
B1
B2
B3
B4
B4R
MAG
W3
D0
D2
D4
(c) homing, SIMULATED (o March, s Ju
homing error (m)
10^3
10^2
10^1
gyro only
zenith
zenith tilt aware
zenith ring tilt aware
magnetometer
10^2
10^3
path length (m)