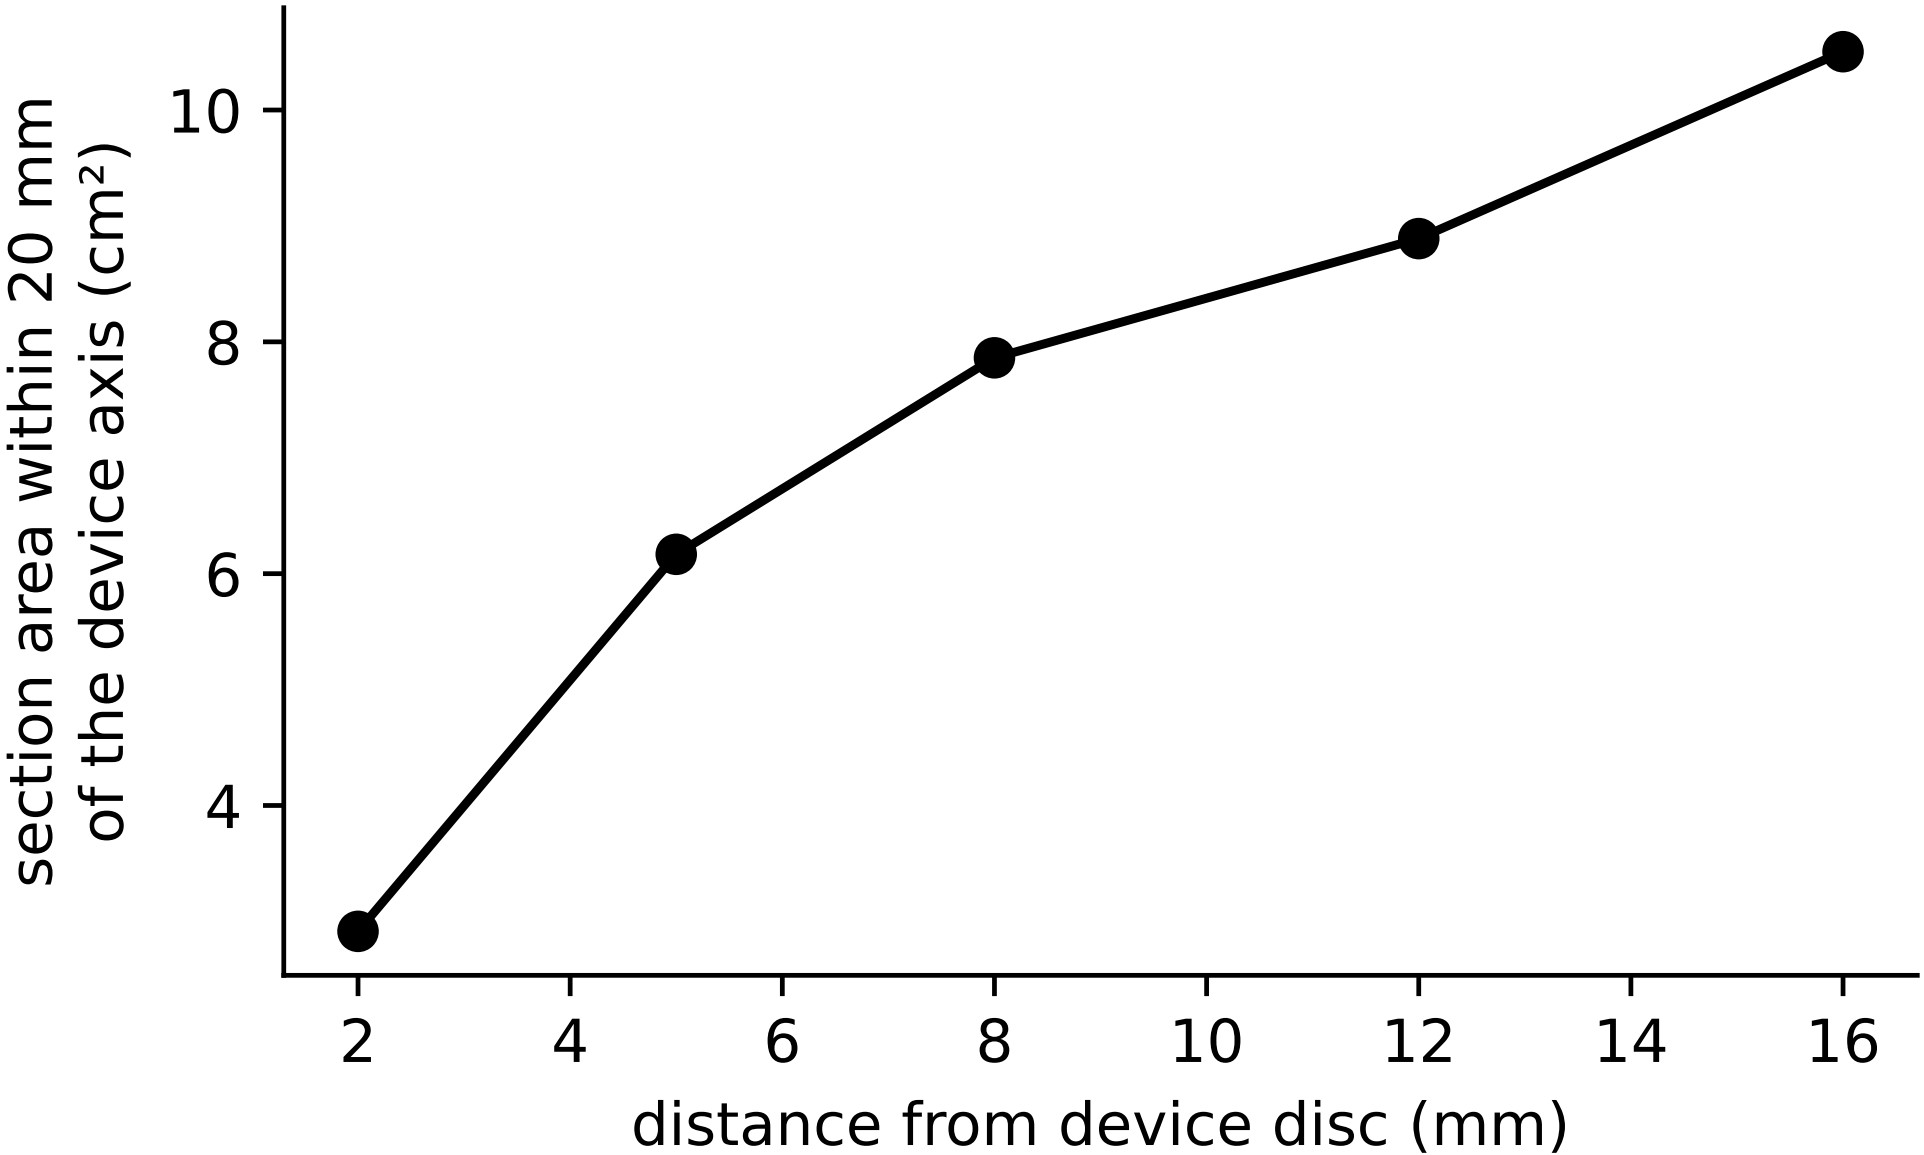
section area within 20 mm
of the device axis (cm²)
10
8
6
4
2
4
6
8
10
12
14
16
distance from device disc (mm)