Preliminary

Energy Storage Solution

All-in-One ESS / DELTerra C

- All-in-one commercial and industrial solution integrating PCS, battery, and EMS
- Full cabinet transportation to reduce site work
- Side cable entry for easy installation without the need for underground trenching
- Flexible configuration options ranging from 125 kW / 261 kWh, with scalability up to 10 sets.

Commercial Buildings

EV Charging Stations

Factories

Fast Setup, Ready-to-Use, and Scalable for Tomorrow's Commercial & Industrial Needs

Our offers DELTerra C 125 kW / 261 kWh all-in-one energy storage system, which is an integrated, full-featured solution designed to meet the needs of commercial & industrial energy storage applications. DELTerra C combines a power conversion system (PCS) module, an advanced liquid-cooling system, battery packs, and an energy management system (EMS) to deliver outstanding performance and convenient installation. It is scalable up to 10 units. This DELTerra C delivers exceptional performance and safety, along with flexible application modes, making it the ideal choice for your energy storage needs.

System Architecture

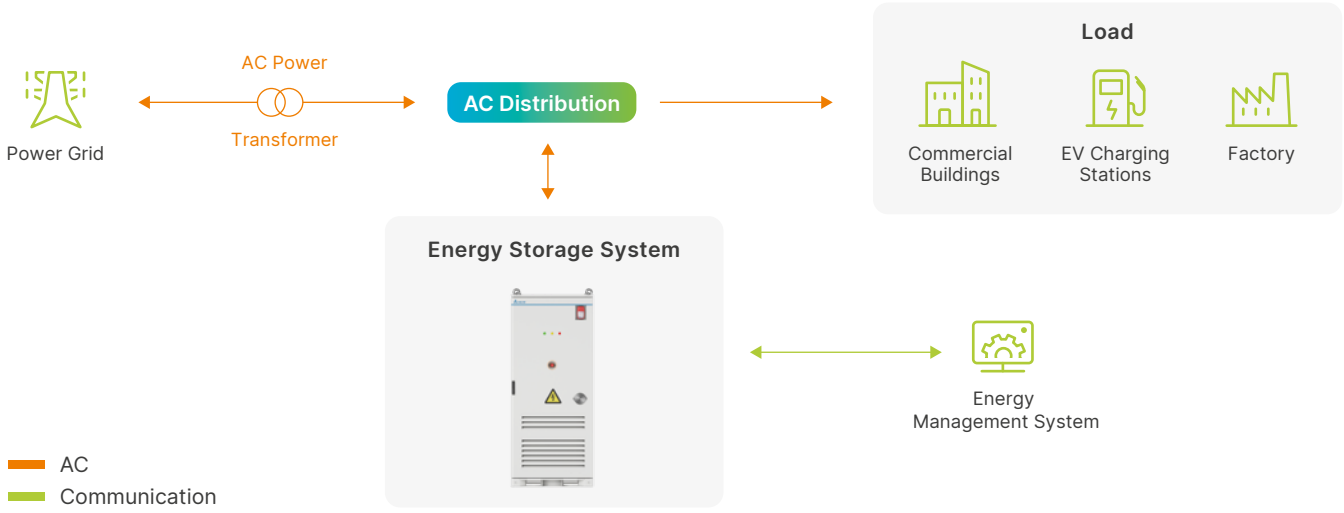

Feature Highlights

Easy and Quick Installation

Designed for forklift transportation and featuring a side cable entry, the system can be quickly installed without the need for trenching, significantly reducing on-site construction time and labor costs.

Traditional

Crane Installation



Traditional

Bottom Cable Entry
with Underground Trenching

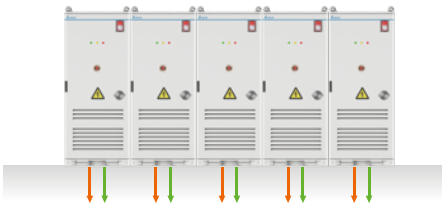

DELTerra C

Forklift Transportation

DELTerra C

Side Cable Entry

Top-Level Safety Protection

Our advanced storage system utilizes LFP 314 Ah cells and a liquid-cooling system to ensure consistent cell lifespan. With top-tier fire safety features, including gas venting, deflagration panels, and water immersion fire protection, we guarantee maximum safety, reliability, and performance, while reducing O&M costs and mitigating potential hazards.

LFP 314 Ah Cell

- Longer life cycle
- High energy density
- UL 9540A

Multi-level Fire Safety

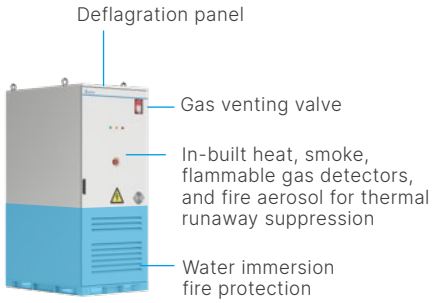

Intelligent Energy Management

Featuring real-time SoC (State of Charge) calibration and cell balancing mechanisms, our EMS supports four operation modes to fully meet diverse needs and achieve efficient energy management.

- 4 Operation Modes: on-demand (P-Q), peak-shaving, TOU-tracking, meter-tracking
- On-grid / off-grid switching time < 20ms
- Support for third party EMS integration

- Real-time SOC calibration & cell balancing mechanisms
- Online maintenance
- Intelligence DoD adjustment

Specifications

Model Name	ESSS-UA124W
System Configuration	
AC Rated Power	125 kW
Battery Capacity (BOL)	261 kWh
Efficiency	> 88% included aux. power
On/Off Grid Switching Time	< 20ms
Max. Number of Parallel Connection	10 units for on-grid and 5 units for off-grid
User Interface	LED, Ethernet
Communication	Modbus TCP
Cooling Method	Liquid cooling for Battery/Forced air cooling with speed control for PCS
AC Information	
Rated Grid Voltage	480/277 Vac (3P4W+PE)
Voltage Range	-15% to +15%
Rated Grid Frequency	50 / 60 Hz
Overload Capability	110% for 30 mins
Current THD	< 3% @ rated linear load
Power Factor	-1 to 1, continuously adjustable
DC Information	
Type of Battery	LFP / 314 Ah
DC Voltage Range (Full load)	728~949 Vdc
C-rate	0.5C
Environment	
Maximum Altitude	4,000 m, de-rating > 2,000 m
Operation Temperature	-30 ºC to +50 ºC
Operation Humdity	0 to 95%, non-condensing
Mechanical Information	
Enclosure Rating	UL 50E TYPE 3R
Dimension (W x D x H)	1300 × 1300 × 2200 mm
Weight	< 2,700 kg
Certifications	
Safety	Ul 1973, UL 9540A, UL 9540, UL 1741
EMC	FCC Part 15 Class A
Grid Code	IEEE 1547, IEEE 1547.1, UL 1741SB
Fire Protection	NFPA 855, NFPA 69, and radiant exitance of the deflagration panel for NFPA 68

-Specifications are subject to change without prior notice.