RCCB Type EV

Type A RCCB with 6mA RDC-DD

Standard_IEC61008-1
IEC62955

Overall and Installation Dimension(mm)

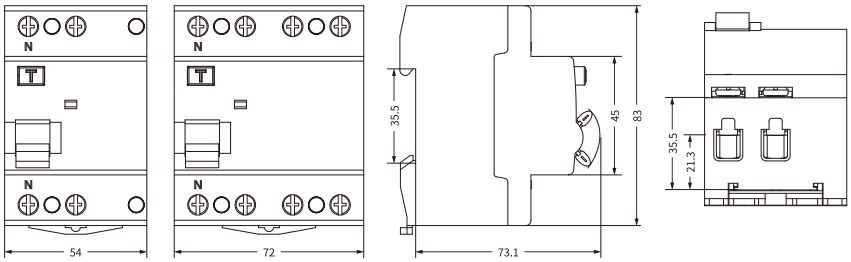

Technical Data

Standard	IEC61008-1, IEC62955
Protection	Ground fault
Type of trip	Electro-magnetic
Type of protection (electric leakage)	A
No.of poles	2P(1P+N), 4P(3P+N) , N Pole on left
Insulation voltage (Ui)	500V
Rated voltage (Ue)	2P: 240V~, 4P: 415V~
Rated currents (In)	16,25,32,40,63A
Rated sensitivity currents (I△n)	30mA
Rated residual operating current (I△dc)	6mA
Residual current off-time under (I△n)	⩽ 0.1s
Rated residual making and breaking capacity (I△m)	500A(In⩽50A), 10In(In>50A)
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
SCPD fuse	10000
Rated impulse withstand voltage(1.2/50) (Uimp)	4,000V
Dielectric test voltage at Ind. Freq.for 1 min	2.5kV
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles
Contact position indicator	Yes
Ground fault indicator	Yes
Protection degree	IP20
Ambient temperature	-25°C to +55°C, Max.95% humidity
Terminal connection type	Cable/Pin-type busbar/Fork-type busbar
Max.terminal size for cable	35mm^2
Max.tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Connection	From top and bottom

RCCB Type B

Residual Current Circuit Breaker

Standard_IEC61008-1
IEC62423

Overall and Installation Dimension(mm)

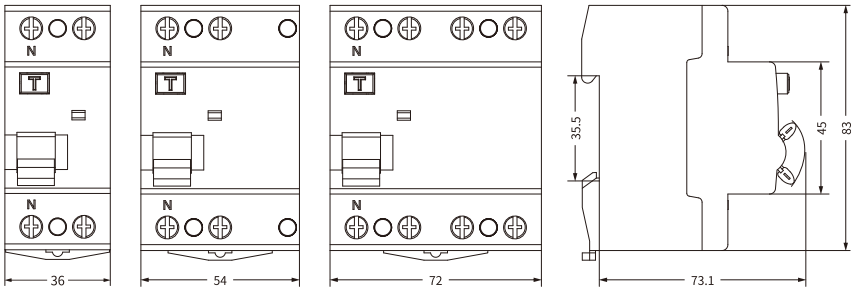

Technical Data

Standard	IEC61008-1, IEC62423
Protection	Ground fault
Type of trip	Electro-magnetic
Type of protection (electric leakage)	B
No.of poles	2P(1P+N), 4P(3P+N), N Pole on left
Insulation voltage (Ui)	500V
Rated voltage (Ue)	2P(1P+N):110/230/240V~, 4P(3P+N):240/400/415V~
Rated currents (In)	16,25,40,63,80,100A
Rated sensitivity currents (I△n)	30,100,300mA
Residual current off-time under (I△n)	⩽ 0.1s
Rated residual making and breaking capacity (I△m)	500A(In⩽50A), 10In(In>50A)
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
SCPD fuse	10000
Rated impulse withstand voltage(1.2/50) (Uimp)	4,000V
Dielectric test voltage at Ind. Freq.for 1 min	2.5kV
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles
Contact position indicator	Yes
Ground fault indicator	Yes
Protection degree	IP20
Ambient temperature	-25°C to +40°C, Max.95% humidity
Terminal connection type	Cable/Pin-type busbar/Fork-type busbar
Max.terminal size for cable	35mm^2
Max.tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Connection	From top and bottom