



Layer Stack Legend

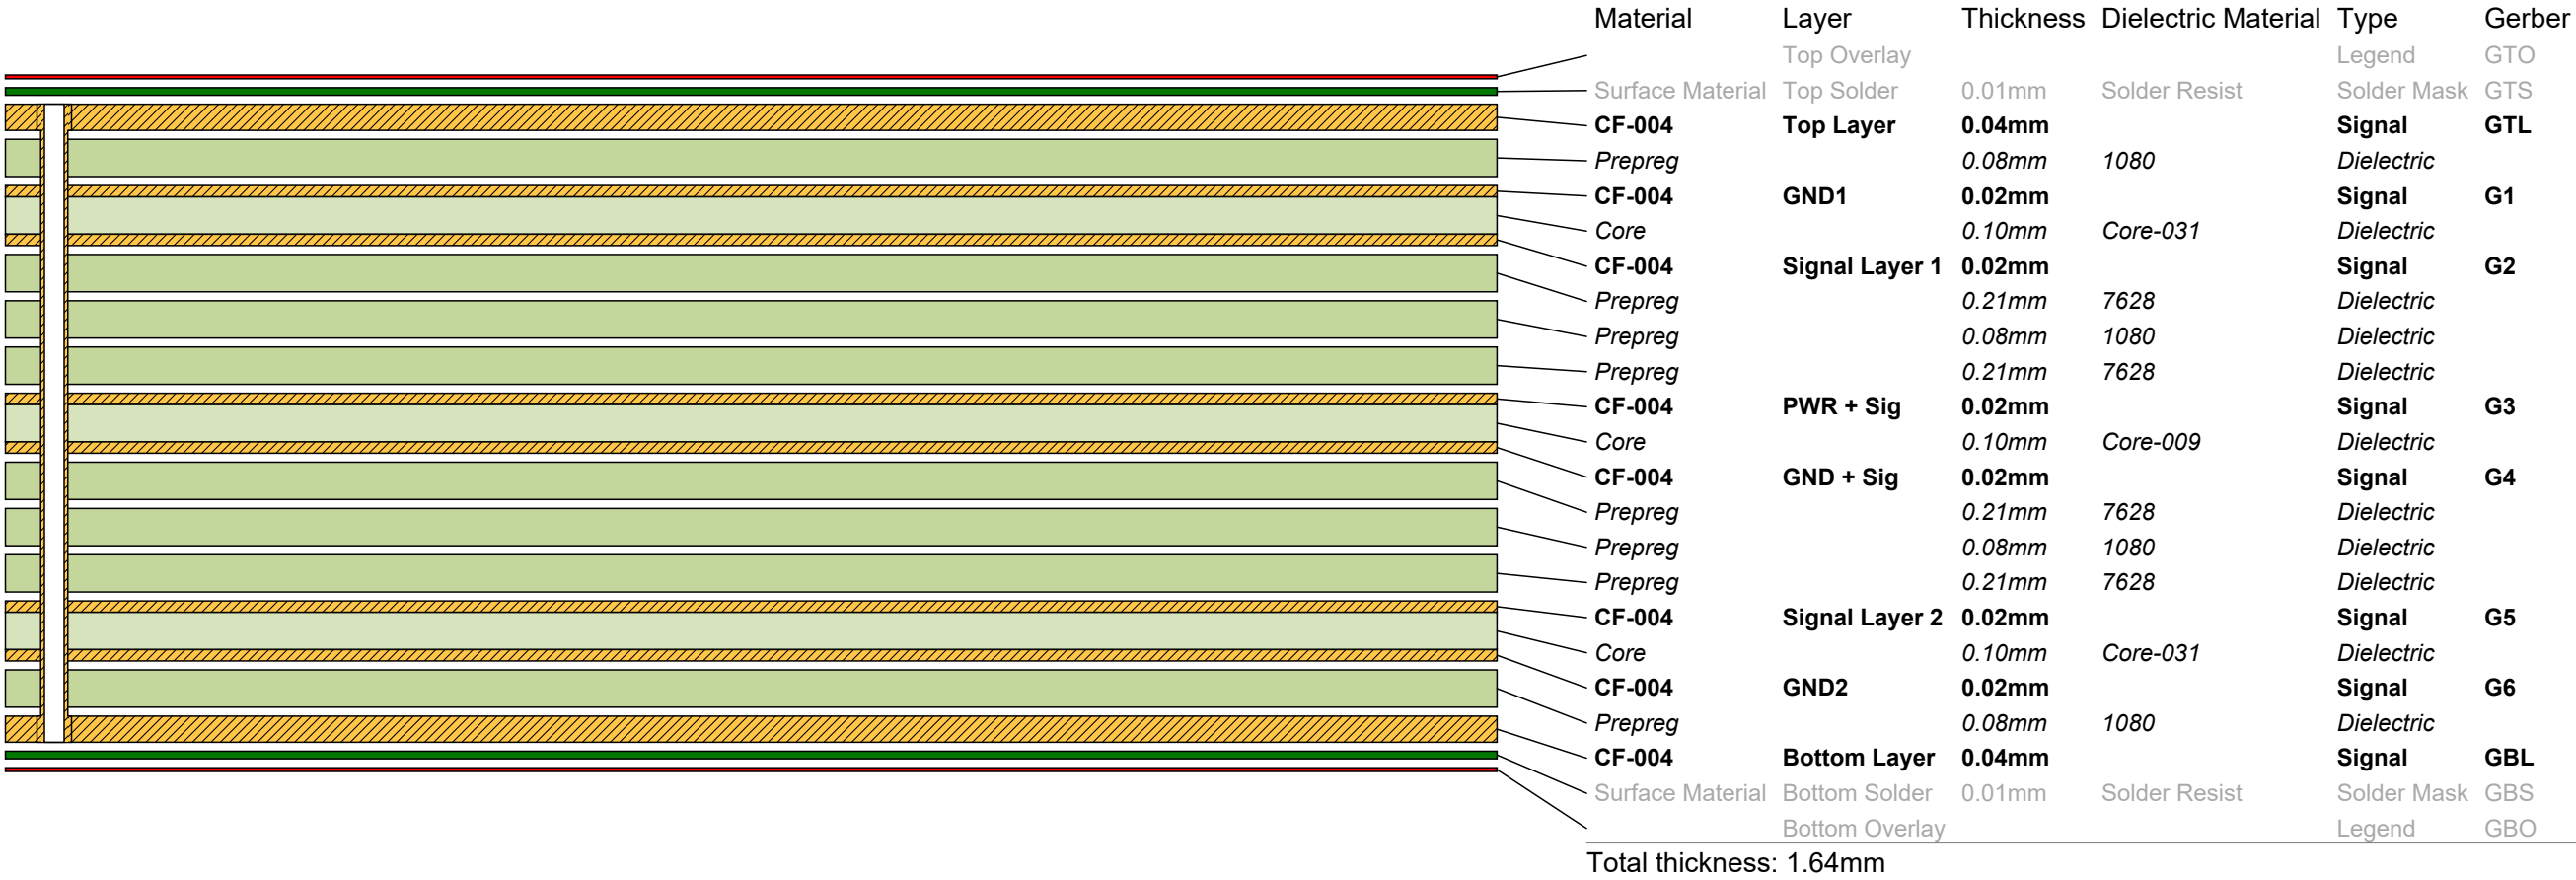

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
✧	516	0.20mm	Plated	
⊕	130	0.60mm	Plated	
✧	2	1.45mm	Non-Plated	
▽	2	1.50mm	Plated	
○	2	3.20mm	Plated	
	652 Total			

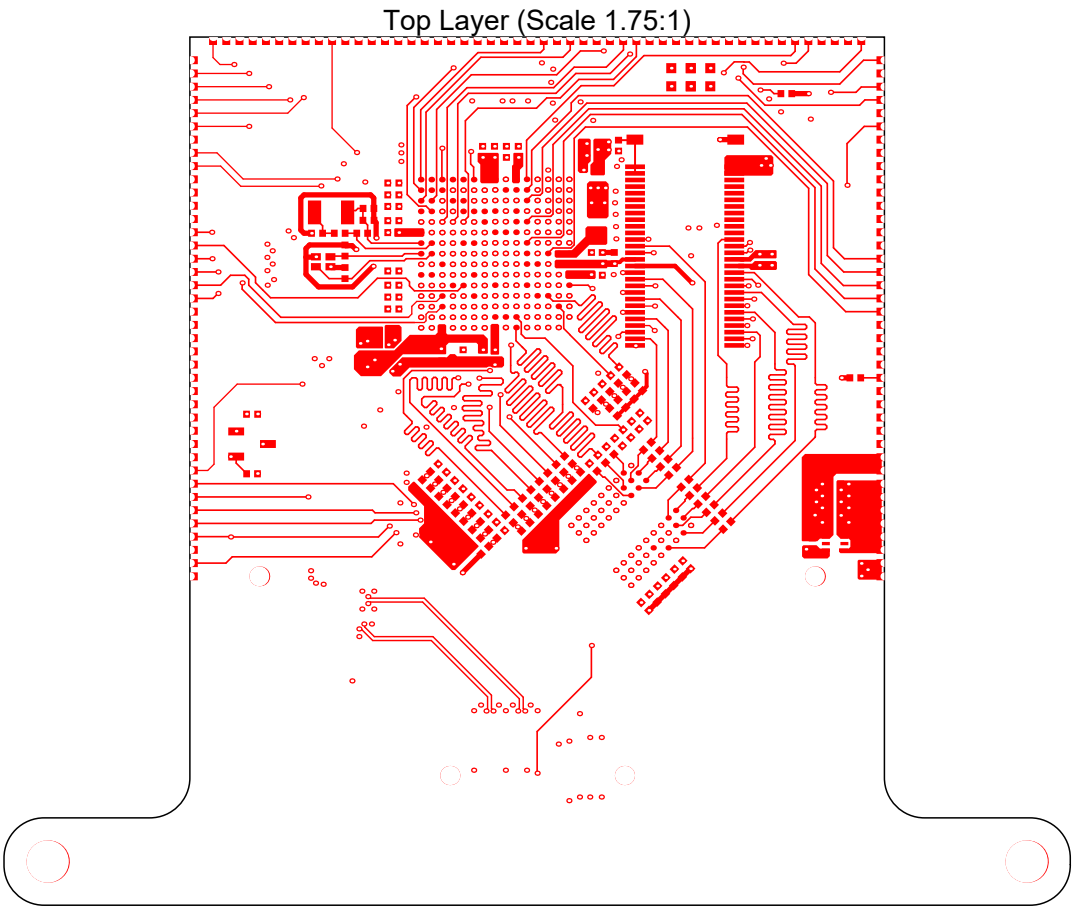

Transmission Line Structure Table

Impedance Id	Transmission Line	Target Impedance	Calculated Impedance	Trace layer	Wide Trace Width	Narrow Trace Width	Gap	Reference layers	Substack	Clearance	Target Tolerance
1	Edge-Coupled Coated Microstrip	90	90.23	Top Layer	0.140mm	0.140mm	0.140mm	GND1	Board Layer Stack	0.000mm	10%
2	Coated Microstrip	50	51.06	Top Layer	0.125mm	0.125mm		GND1	Board Layer Stack	0.127mm	10%
3	Edge-Coupled Coated Microstrip	100	99.49	Top Layer	0.110mm	0.110mm	0.184mm	GND1	Board Layer Stack	0.127mm	10%
4	Offset Stripline	50	53.86	Signal Layer 1	0.100mm	0.100mm		GND1,PWR + Sig	Board Layer Stack	0.127mm	10%
5	Edge-Coupled Offset Stripline	90	90.85	PWR + Sig	0.120mm	0.120mm	0.200mm	Signal Layer 1,GND + Sig	Board Layer Stack	0.127mm	10%
6	Offset Stripline	50	53.95	PWR + Sig	0.100mm	0.100mm		Signal Layer 1,GND + Sig	Board Layer Stack	0.127mm	10%
7	Edge-Coupled Offset Stripline	90	90.85	GND + Sig	0.120mm	0.120mm	0.200mm	PWR + Sig,Signal Layer 2	Board Layer Stack	0.127mm	10%
8	Offset Stripline	50	53.95	GND + Sig	0.100mm	0.100mm		PWR + Sig,Signal Layer 2	Board Layer Stack	0.127mm	10%
9	Offset Stripline	50	53.86	Signal Layer 2	0.100mm	0.100mm		GND + Sig,GND2	Board Layer Stack	0.127mm	10%
10	Edge-Coupled Coated Microstrip	90	90.23	Bottom Layer	0.140mm	0.140mm	0.140mm	GND2	Board Layer Stack	0.000mm	10%
11	Coated Microstrip	50	51.06	Bottom Layer	0.125mm	0.125mm		GND2	Board Layer Stack	0.127mm	10%
12	Edge-Coupled Coated Microstrip	100	99.49	Bottom Layer	0.110mm	0.110mm	0.184mm	GND2	Board Layer Stack	0.127mm	10%

FABRICATION NOTES

Design Features

Number of Layers: 8
Smallest Via Drill/Pad: 0.20mm (See drill table)
Impedance Control: YES
Gold Fingers: NO
Castellated Holes: YES

Silkscreen Color (Top & Bottom): WHITE

Soldermask Color (Top & Bottom):
Renesas Blue
CMYK 73/75/0/38
RGB 40 40 157
#2A 28 9D HEX


Materials and Ratings

Core Material: FR4 Tg (C min): 170 Td (C min): 330
PAD Finish: ENIG
Finished Board Thickness: 1.64mm (See Chart)
Finished outer layer Cu min thickness: 1oz (See Chart)
Copper thickness - inner layers: 1/2oz (See Chart)
ROHS Required: YES
UL94V Rating: UL94V-0
IPC-A-6011/IPC-A-6012 Class: 2 Inspect per IPC-A-600


Materials and Ratings

Board Lot and QC Stamp
UL94V-0
ROHS


Top Overlay (Scale 1:1.43)

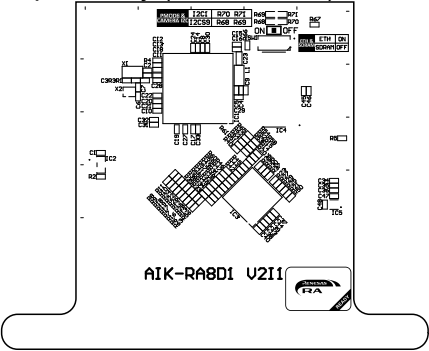


Top Layer (Scale 1:1.43)

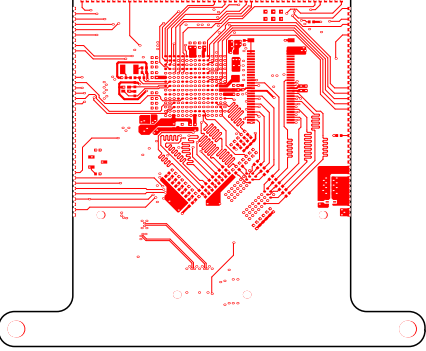


GND1 (Scale 1:1.43)

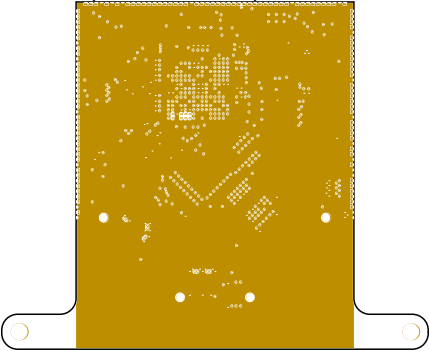


Signal Layer 1 (Scale 1:1.43)

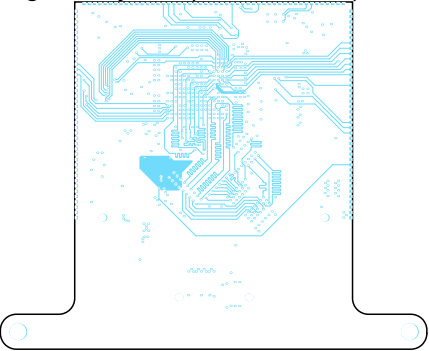


PWR + Sig (Scale 1:1.43)

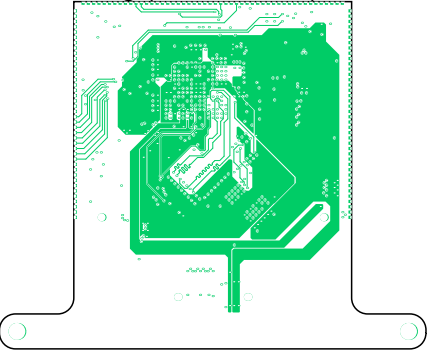


GND + Sig (Scale 1:1.43)

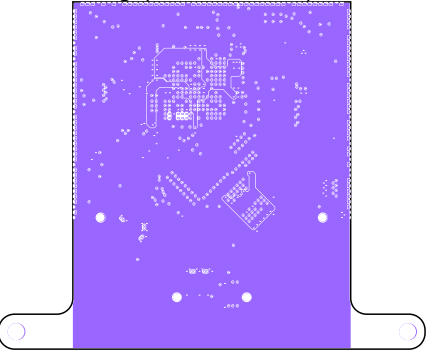


Signal Layer 2 (Scale 1:1.43)

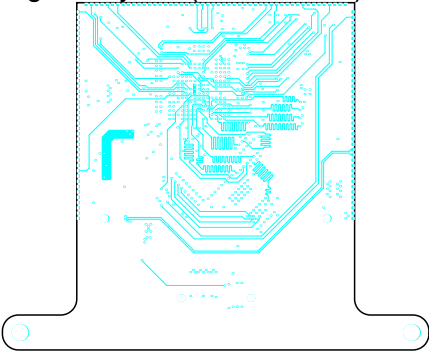

GND2 (Scale 1:1.43)

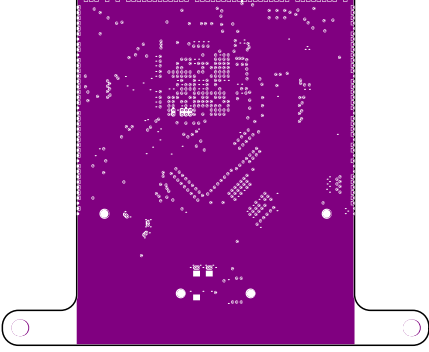

Bottom Layer (Scale 1:1.43)

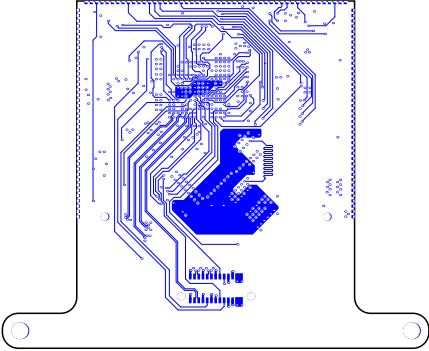

Bottom Overlay (Scale 1:1.43)

