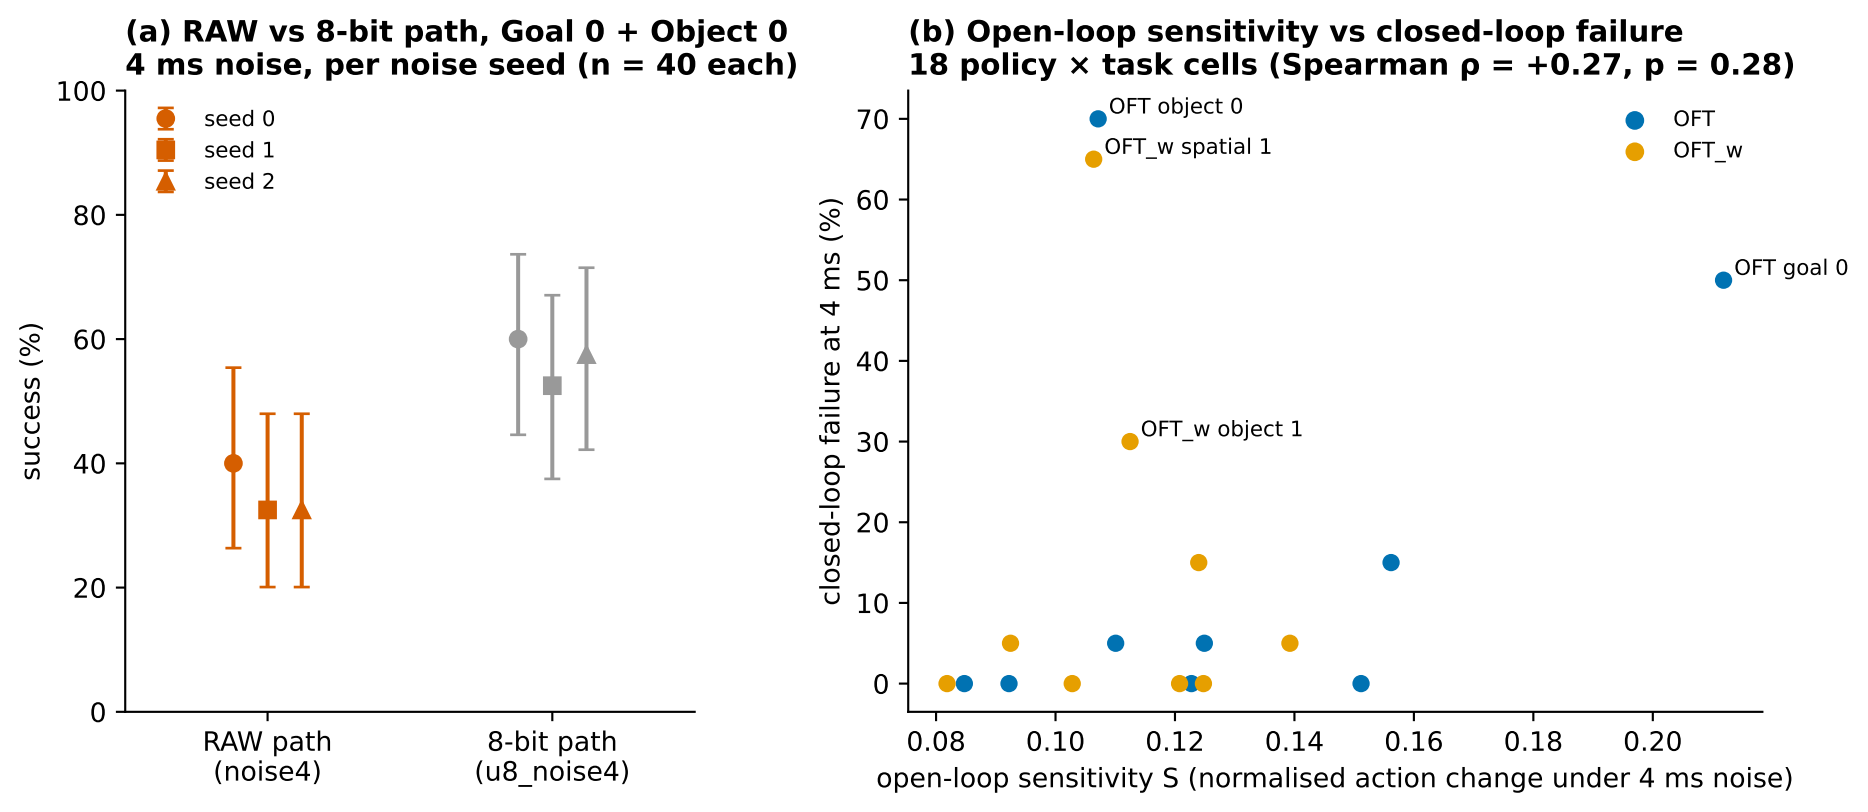
(a) RAW vs 8-bit path, Goal 0 + Object 0
4 ms noise, per noise seed (n = 40 each)
seed 0
seed 1
seed 2
success (%)
100
80
60
40
20
0
RAW path
(noise4)
8-bit path
(u8_noise4)
(b) Open-loop sensitivity vs closed-loop failure
18 policy × task cells (Spearman ρ = +0.27, p = 0.28)
OFT object 0
OFT_w spatial 1
OFT_w object 1
OFT goal 0
OFT
OFT_w
closed-loop failure at 4 ms (%)
70
60
50
40
30
20
10
0
0.08
0.10
0.12
0.14
0.16
0.18
0.20
open-loop sensitivity S (normalised action change under 4 ms noise)