

BIT-K7203

PTZ Keyboard Controller



Features

- ✧ Mini Smaller Keyboard, Controllable speed of Pan/Tilt and Zoom In/Out;
- ✧ Built-In Pelco P/D Protocol;
- ✧ Selectable Baud Rate;
- ✧ 4 sets Keyboard cascade connection, Max controllable 128pcs devices
- ✧ Power Consumption:4.2W;
- ✧ Work voltage: DC[9~12V]±10%;
- ✧ Working Temperature:-20°~+50°
- ✧ OSD Menu, Display Address/Protocol/Baud Rate/ Minitor ID/Joystick Status etc;
- ✧ Universal 3D Joystick;

Specifications

Model No.	BIT-K7203
Communication	RS232,RS485
Distance	Max. transmitting distance 1200m
Baud rate	2400bps,4800bps,9600bps,19200bps
Protocol	PELCO P/D
Power supply	DC(9V ~ 12V)±10%
Electric current	350mA
Power consumption	4.2W
Standby consumption	1W
Environment temperature	-20℃ ~ +50℃

Blue Icon (Tianjin) Technology Co., Ltd.

F9, Macalline Business Center, No. 29, Heiniucheng Rd., Hexi District, Tianjin, China


www.bit-cctv.com

sales@bit-cctv.com

+86-186-2272-9230

Humidity	0~95%(Non-condensation)
Dimension	181(L)*219(W)*97(H)mm
Net weight	1.3Kg

Dimension:

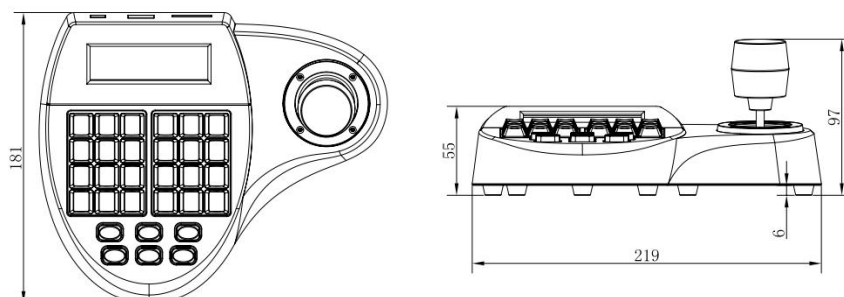

Unit: mm

Blue Icon (Tianjin) Technology Co., Ltd.

F9, Macalline Business Center, No. 29, Heiniucheng Rd., Hexi District, Tianjin, China

www.bit-cctv.com

sales@bit-cctv.com

+86-186-2272-9230