



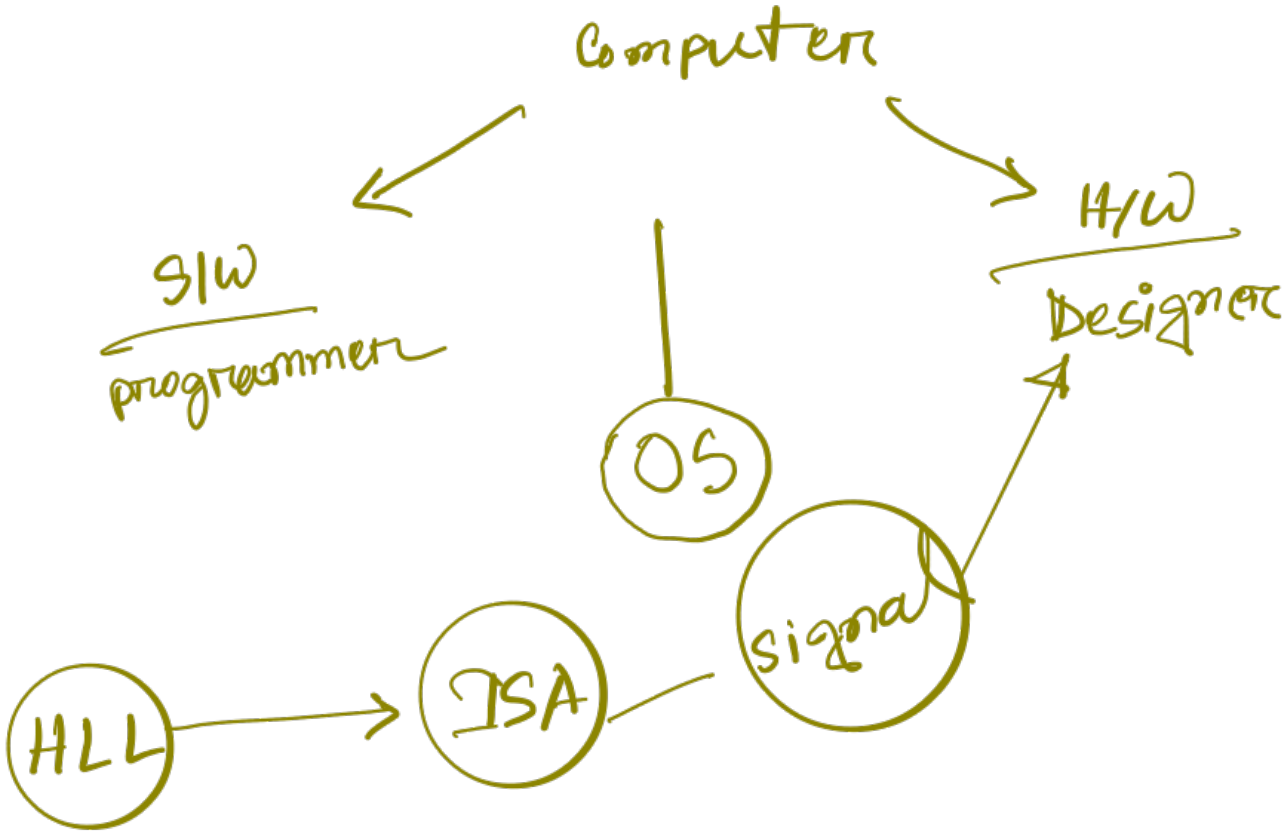

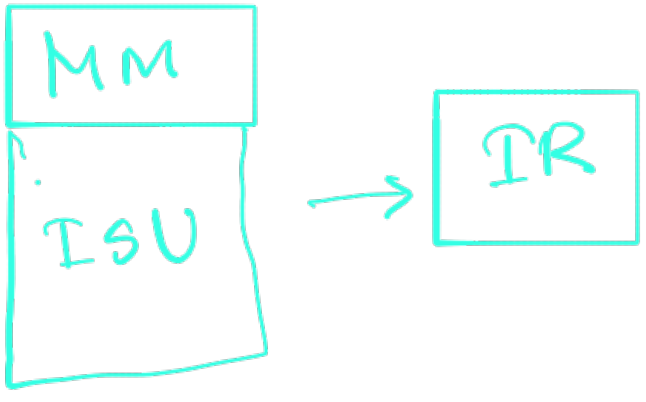

operation Name (4 bits)
↳ 16 diff type of operation

4 address
2 binary
1 num
1 result


2 address

↳ physical → Memu convert → logical

implicit address

↳ won't be mentioned directly in instruction but Microprocessor will know.

opcode src, dest

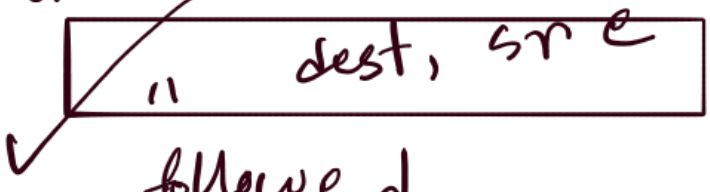

followed

$Y = \frac{A - B}{C + (D \times E)}$ → 3 address → opcode dest (src1, src2)

opcode multiplication

Dest

Y D,E

↓ not D as input address can't be changed.

Add Y, C, Y

Sub T A, B

↓

Temp

Div Y, T, Y

2 address

before op → dest is src
after " → " " dest

Load Y, E
MULT Y, D
Add Y, C
Load Y, A
SUB Y, B
Div Y, T

1 address: opcode (accum), dest

Load E [Acc = E]
Mult D " = Acc * D
Add C

Store T T=Acc

Load A Acc=A

SUB B

Div T

store Y

Y = Acc

H.W

For 0 address → we will use stack

T = T + (-1)