


Sơ đồ mạng (topology)

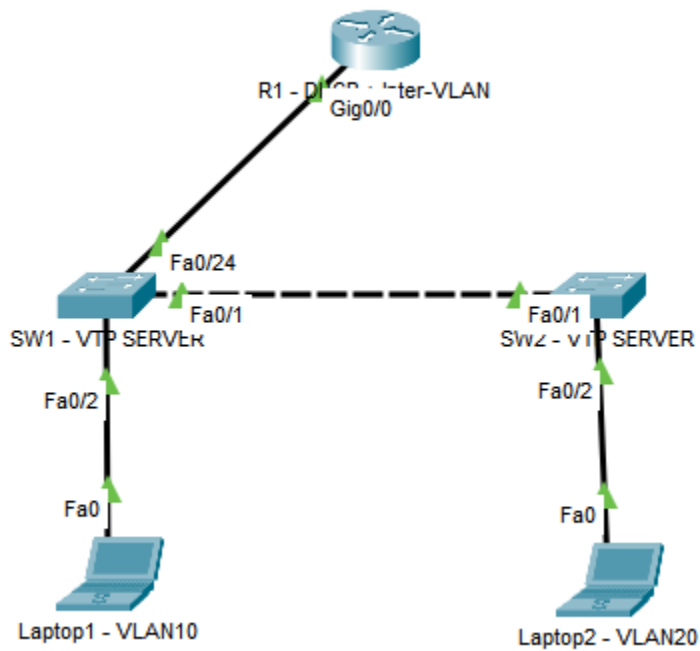

Kiểm tra cấu hình trên router:

```
Router#show ip dhcp binding
IP address      Client-ID/
                Hardware address
192.168.20.11   0000.0CAE.A587   --   Automatic
192.168.20.12   0001.6445.DA2C   --   Automatic
Router#
```

Check cấu hình trên SW1 và SW2

```
SW1#show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/3, Fa0/4, Fa0/5, Fa0/6 Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Gig0/1, Gig0/2
10 SALES	active	Fa0/2
20 IT	active	
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

```
SW1#show interfaces trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Fa0/1	on	802.1q	trunking	1
Fa0/24	on	802.1q	trunking	1

Port	Vlans allowed on trunk
Fa0/1	1-1005
Fa0/24	1-1005

Port	Vlans allowed and active in management domain
Fa0/1	1,10,20
Fa0/24	1,10,20

Port	Vlans in spanning tree forwarding state and not pruned
Fa0/1	1,10,20
Fa0/24	1,10,20


```
SW2#show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/3, Fa0/4, Fa0/5, Fa0/6 Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1, Gig0/2
10 SALES	active	
20 IT	active	Fa0/2
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

```

-----
SW2#show interfaces trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/1     auto      n-802.1q       trunking    1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1,10,20

```

TEST ping từ laptop1 sang laptop 2

```

C:\>ping 192.168.20.12

Pinging 192.168.20.12 with 32 bytes of data:

Reply from 192.168.20.12: bytes=32 time<1ms TTL=127
Reply from 192.168.20.12: bytes=32 time<1ms TTL=127
Reply from 192.168.20.12: bytes=32 time<1ms TTL=127
Reply from 192.168.20.12: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.20.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>

```