


Bài tập bổ sung: Cấu hình cho phép PC-IT 192.168.10.10 và SERVER 192.168.30.10 ⇔
ServerDATA 192.168.3.2/ chặn PC-STAFF => ServerDATA

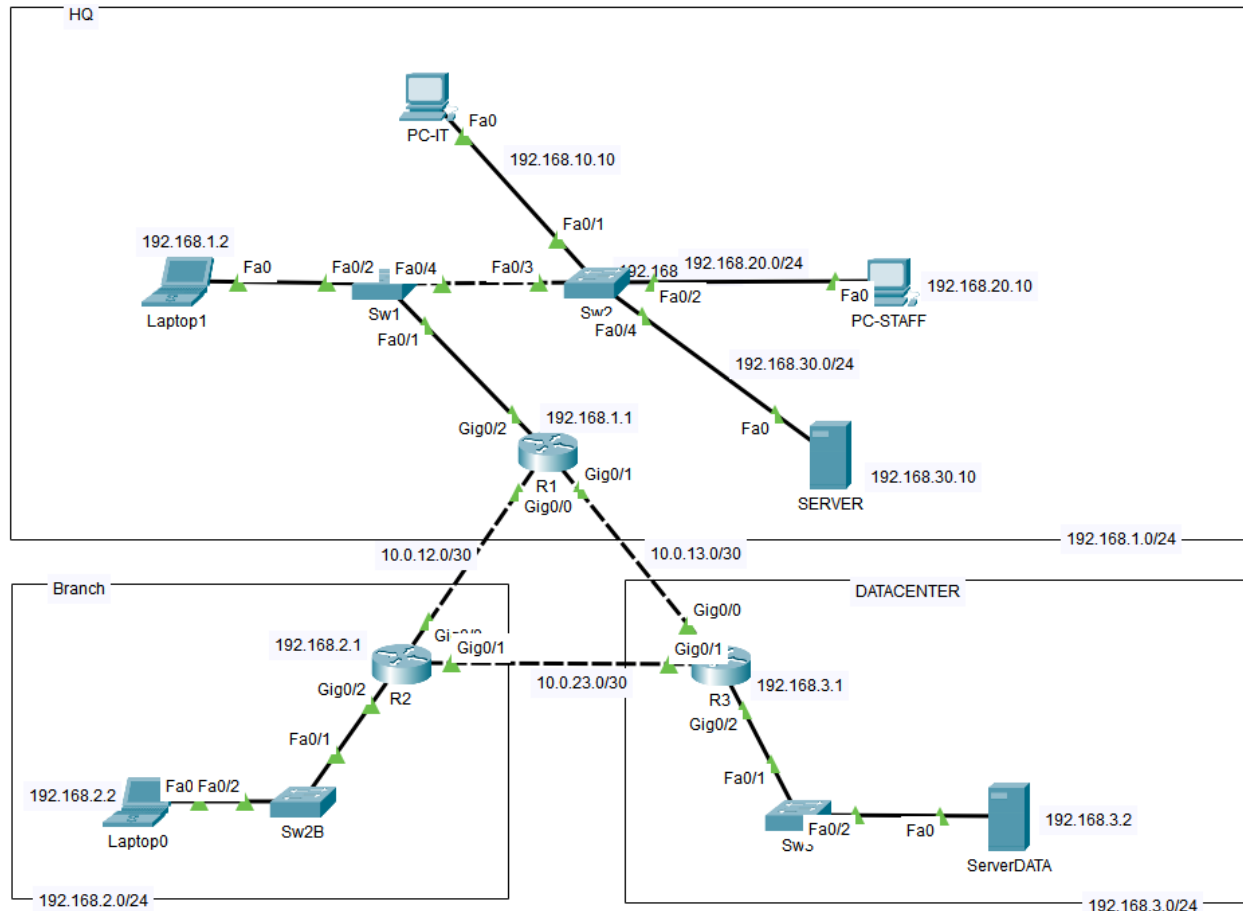

Ping từ HQ tới DATACENTER: Fail

```

PC-IT
C:\>ping 192.168.3.2



Pinging 192.168.3.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>

```

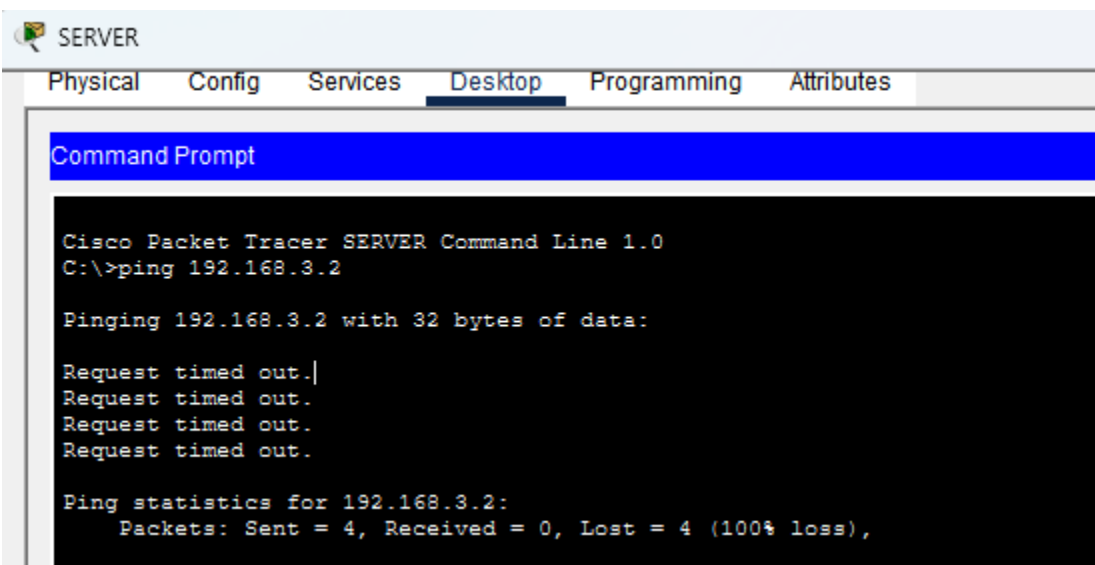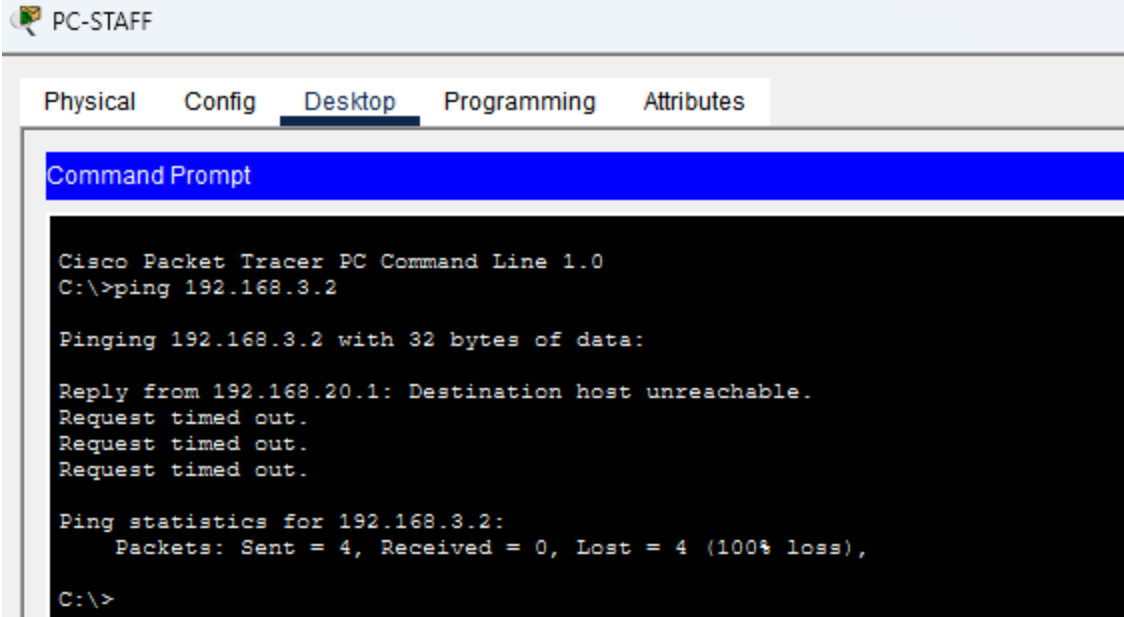

Nguyên nhân: do trên R1 chưa khai báo cấu VLAN10/30 vào OSPF

```
R1#show ip ospf interface br
Interface      PID  Area                IP Address/Mask      Cost  State
Nbrs F/C
Gig0/0         1    0                   10.0.12.1/255.255.255.252  1    WAIT  0/0
Gig0/1         1    0                   10.0.13.1/255.255.255.252  1    WAIT  0/0
Gig0/2         1    0                   192.168.1.1/255.255.255.0   1    WAIT  0/0

R1#

R1#show running-config | section router ospf
router ospf 1
 log-adjacency-changes
 network 192.168.1.0 0.0.0.255 area 0
 network 10.0.12.0 0.0.0.3 area 0
 network 10.0.13.0 0.0.0.3 area 0
R1#
```

Cấu hình OSPF khai báo 2 VLAN 10/30 vào R1

```
R1(config)#interface gigabitEthernet 0/2.30
R1(config-subif)#router ospf 1
R1(config-router)#network 192.168.30.0 0.0.0.255 area 0
R1(config-router)#end
```

```
R1#show ip ospf interface brief
```

Interface	PID	Area	IP Address/Mask	Cost	State
Nbrs F/C					
Gig0/0	1	0	10.0.12.1/255.255.255.252	1	DR 0/0
Gig0/1	1	0	10.0.13.1/255.255.255.252	1	DR 0/0
Gig0/2	1	0	192.168.1.1/255.255.255.0	1	DR 0/0
Gig	1	0	192.168.10.1/255.255.255.0	1	DR 0/0
Gig	1	0	192.168.30.1/255.255.255.0	1	DR 0/0

```
GigabitEthernet0/2.10 is up, line protocol is up
Internet address is 192.168.10.1/24, Area 0
Process ID 1, Router ID 192.168.30.1, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State DR, Priority 1
```

```
GigabitEthernet0/2.30 is up, line protocol is up
Internet address is 192.168.30.1/24, Area 0
Process ID 1, Router ID 192.168.30.1, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State DR, Priority 1
Designated Router (ID) 192.168.30.1, Interface address 192.168.30.1
No backup designated router on this network
Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
Hello due in 00:00:03
Index 5/5, flood queue length 0
```

```
R1#show running-config | section router ospf
router ospf 1
 log-adjacency-changes
 network 192.168.1.0 0.0.0.255 area 0
 network 10.0.12.0 0.0.0.3 area 0
 network 10.0.13.0 0.0.0.3 area 0
 network 192.168.10.0 0.0.0.255 area 0
 network 192.168.30.0 0.0.0.255 area 0
```

Kiểm tra ping từ VLAN 10/30 tới DATACENTER

```
PC-IT
C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:

Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
SERVER

C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:

Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Từ chiều DATACENTER tới 2 VLAN

```
ServerDATA

Pinging 192.168.10.10 with 32 bytes of data:

Reply from 192.168.10.10: bytes=32 time<1ms TTL=126
Reply from 192.168.10.10: bytes=32 time=1ms TTL=126
Reply from 192.168.10.10: bytes=32 time=1ms TTL=126
Reply from 192.168.10.10: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.30.10


Pinging 192.168.30.10 with 32 bytes of data:

Reply from 192.168.30.10: bytes=32 time<1ms TTL=126
Reply from 192.168.30.10: bytes=32 time<1ms TTL=126
Reply from 192.168.30.10: bytes=32 time<1ms TTL=126
Reply from 192.168.30.10: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.30.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

VLAN20 vẫn bị chặn do chưa khai báo trên R1

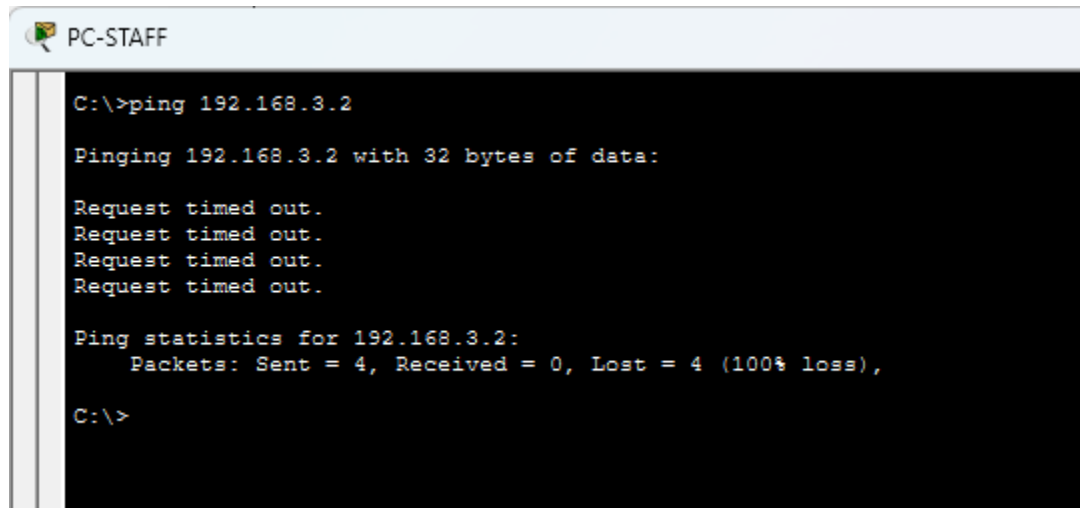

```
C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

! không cần cấu hình ACL chặn, chỉ cần khai báo VLAN10/20 trên R1