



NIDEC SV PROBE VIETNAM CO., LTD

MEMs Flex Probe Enhancements

Basic Modifications to Convert from
Standard to Enhanced Design & New Part
Numbering System – Rev. 01


Confidential
Expiration date
()

Organization : Design Dept.

By Trung HN

Date : 8th Oct 2026

Visual Overview of Changes – All Nodes

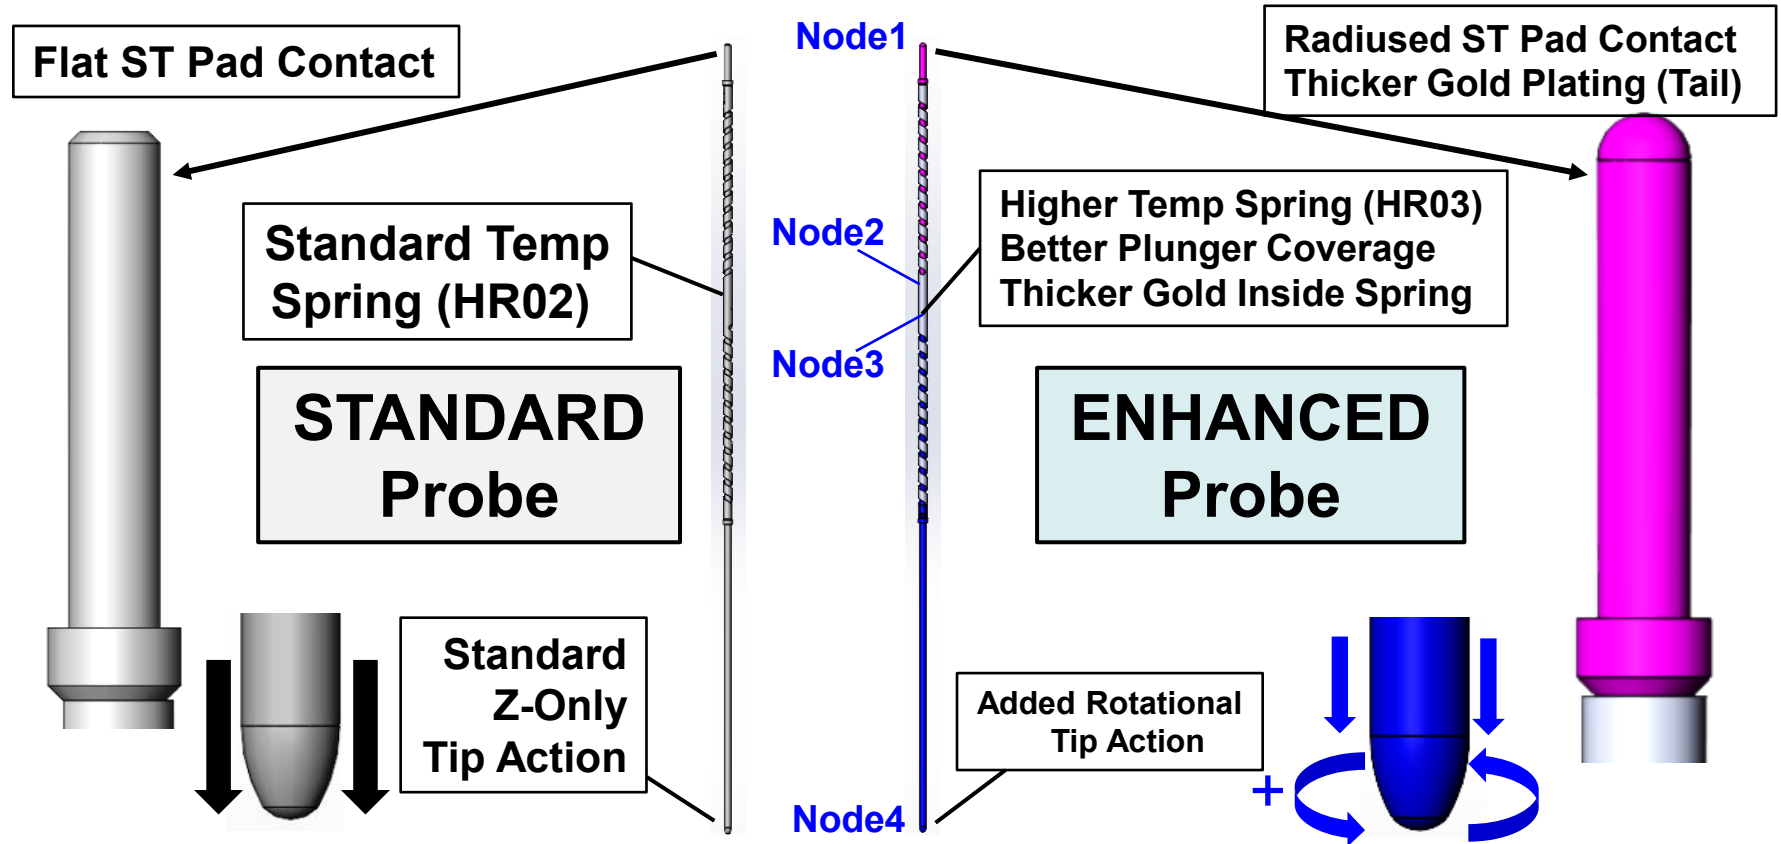

MEM-GPPPXX-01

G: Generation No., =0, current; =1, “Enhanced”

PPP: *TRUE* Pitch Capability, ex. 080 for P80, but
137 for P147, 173 for P200 and 277 for P300

XX: Sequential Design Index Number
01 thru 16: Reserved for Standard Designs
17 thru 99: Open for Custom Designs

Common “Enhanced” MEMsFlex Probe Set



Nominal Pitch	TRUE Minimum Pitch	P/N	Length	Force	Rotation	Tip Shape
Pnnn Probe	ppp	MEM-1ppp01-01	Long	Low	Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp02-01	Long	Low	Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp03-01	Long	Low	Non-Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp04-01	Long	Low	Non-Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp05-01	Long	High	Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp06-01	Long	High	Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp07-01	Long	High	Non-Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp08-01	Long	High	Non-Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp09-01	Short	Low	Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp10-01	Short	Low	Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp11-01	Short	Low	Non-Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp12-01	Short	Low	Non-Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp13-01	Short	High	Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp14-01	Short	High	Rotation	Flat
Pnnn Probe	ppp	MEM-1ppp15-01	Short	High	Non-Rotation	Radiused
Pnnn Probe	ppp	MEM-1ppp16-01	Short	High	Non-Rotation	Flat

New MEMsFlex Part Number Example P147



Standard Series P147 probes: *True minimum pitch capability is 137um for P147*

Probe P/N	Type	Length	Force	Rotation	Tip Shape
MEM-113701-01	Standard	Long	Low	Rotation	Radiused
MEM-113702-01	Standard	Long	Low	Rotation	Flat
MEM-113703-01	Standard	Long	Low	Non-Rotation	Radiused
MEM-113704-01	Standard	Long	Low	Non-Rotation	Flat
MEM-113705-01	Standard	Long	High	Rotation	Radiused
MEM-113706-01	Standard	Long	High	Rotation	Flat
MEM-113707-01	Standard	Long	High	Non-Rotation	Radiused
MEM-113708-01	Standard	Long	High	Non-Rotation	Flat
MEM-113709-01	Standard	Short	Low	Rotation	Radiused
MEM-113710-01	Standard	Short	Low	Rotation	Flat
MEM-113711-01	Standard	Short	Low	Non-Rotation	Radiused
MEM-113712-01	Standard	Short	Low	Non-Rotation	Flat
MEM-113713-01	Standard	Short	High	Rotation	Radiused
MEM-113714-01	Standard	Short	High	Rotation	Flat
MEM-113715-01	Standard	Short	High	Non-Rotation	Radiused
MEM-113716-01	Standard	Short	High	Non-Rotation	Flat

The first 16 design index numbers are reserved for these constructions

EXAMPLE: **MEM-113705-01**

This is a next generation MEMsFlex probe designed with all reliability enhancements

This probe has a *TRUE* minimum pitch capability of 137um

This probe has the standard reserved “05” design characteristics: it is a long(4.679mm), high force(23-27g/mm), rotation probe with a radiused tip for probing pads.

EXAMPLE: **MEM-113717-01**


This is a next generation MEMsFlex probe designed with all reliability enhancements

This probe has a *TRUE* minimum pitch capability of 137um

17-99 are custom designs

This probe is a custom design, so its length, force, rotation status, and tip shape are all unrestricted, defined by the Designer, but it must contain plating enhancements, a radiused tail plunger, and the required plunger capture in the spring and HR03 heat treatment of the spring to qualify for next generation status.

Implementation Plan – 2-year Timeframe

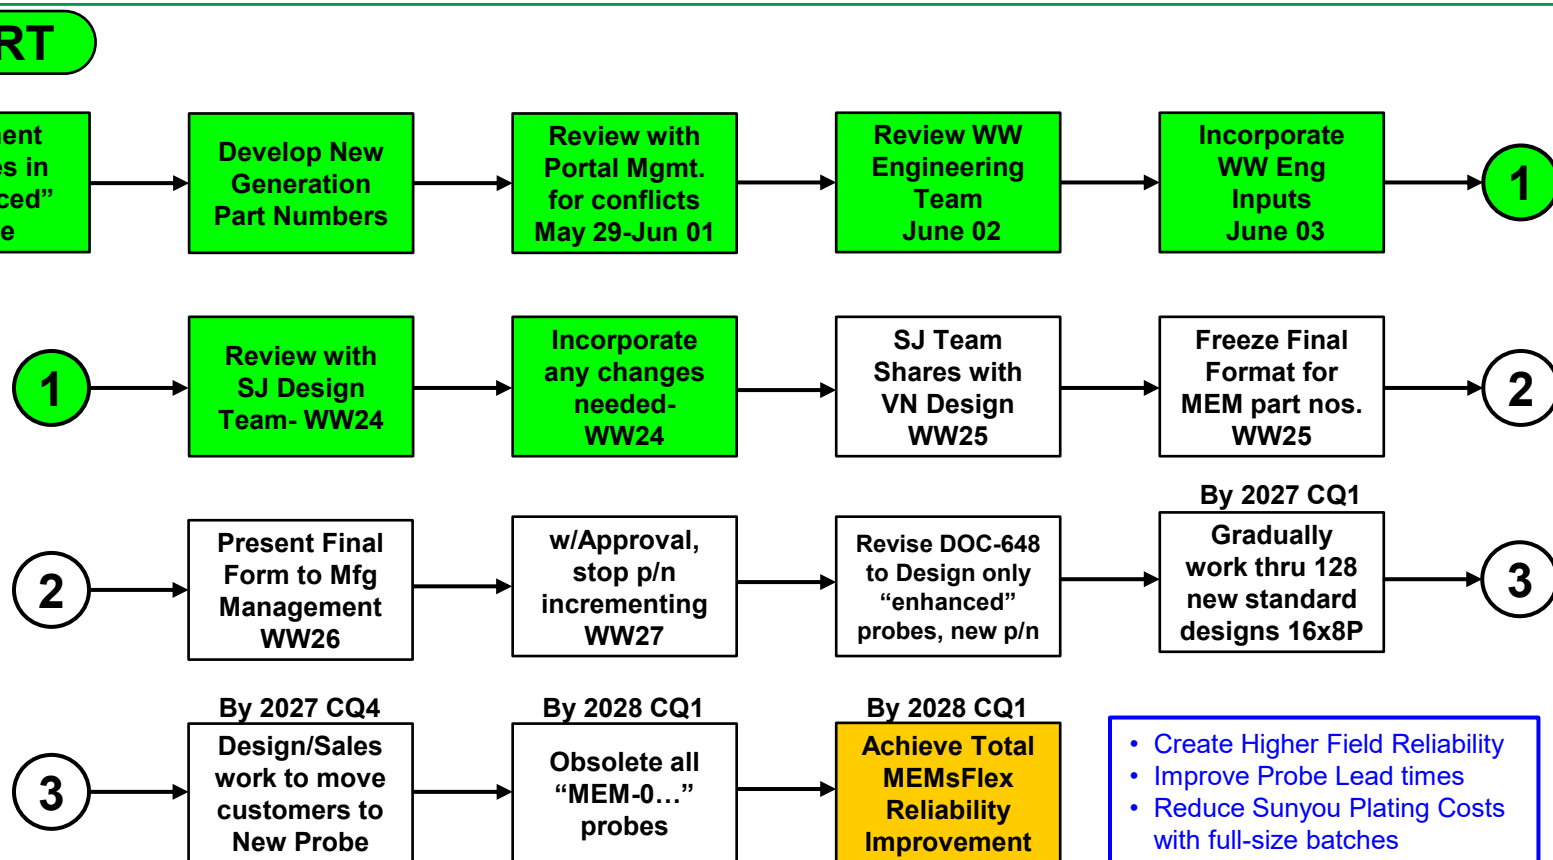

- Owner: SVPA Engineering (Jordan, Toan Do)
 - Coordinate project
- Support implement: SVPV Design (Khuong, Trung)
 - Design new probe
 - Recommend new probe for new devices/feasibilities
 - Record actual orders used enhanced probes

Nidec